

DI VAPOR

B-DV002 THE COSMO

PRE-INSTALLATION & DELIVERY GUIDE

Thank you for your interest in the Cosmo hydromassage bathtub. It is important that the following guidelines are carefully followed for successful installation.

ASSEMBLY

ATTENTION: The Cosmo is free-standing and should not be built-in. This allows for quick access to the services and easier fitting.

DELIVERY INFORMATION

This unit will be delivered in 1 wooden crate. To include packaging please expect:

BOX 1 WEIGHT = 150 kgs
DIMENSIONS = 190 cm x 950 cm x 650 cm

ELECTRICALS

- Electrical supply should be wired from a 16 amp I.P. 56 socket directly back to the consumer box.
- *Caution: The length of the cable connecting to the audio source may effect the quality of the sound.*

PLUMBING

- Both Hot & Cold water supplies must be of constant pressure. The unit requires a supply pressure of 1.5-2.0 bar, typically provided by a:
 1. Combi Boiler,
 2. Pressurised Pump, or
 3. Pressurised Cylinder.
- Pipework must be recessed to allow the finished unit to sit flush against the wall.
- Use full bore water lever ball valves for the hot and cold supply to enable quick & easy shutoff of the supply. See Figure 3.
- The bath comes pre-connected with a flexible waste hose. This flexible hose should be connected to the rooms built-in waste pipe and exit as shown in Figure 2.

DRAINAGE


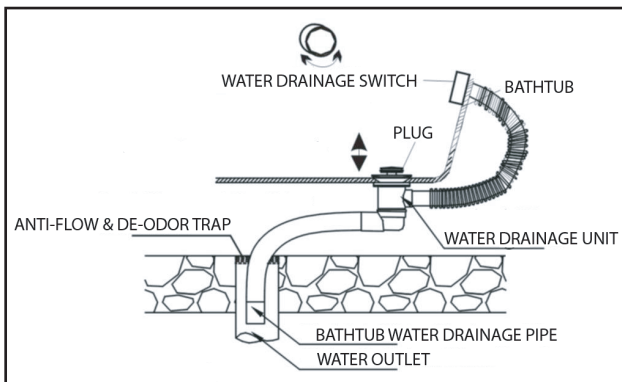


Figure 1

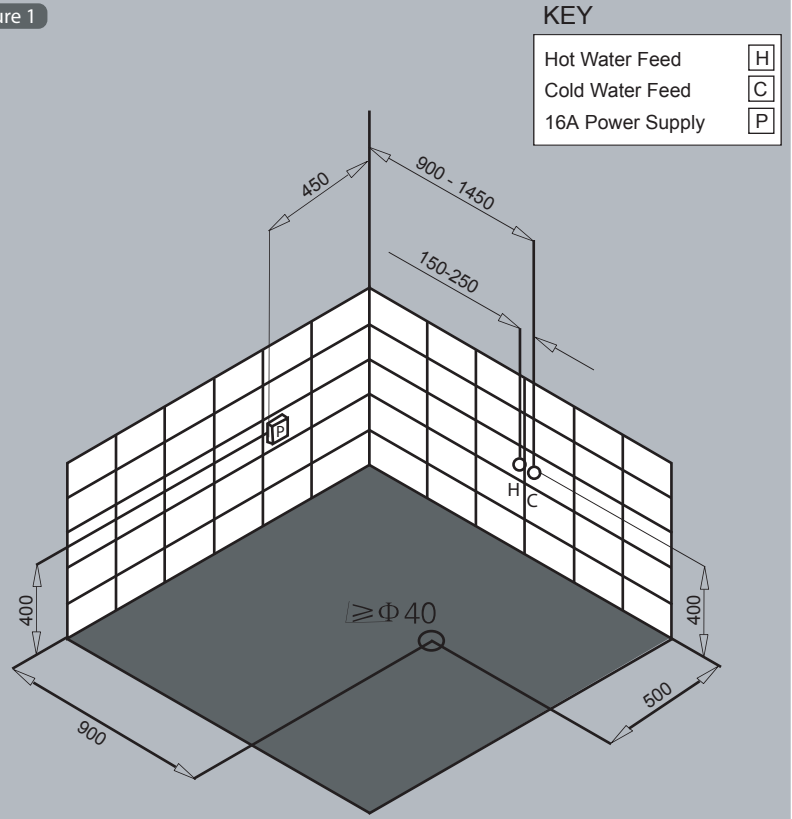

PLEASE ENSURE THAT WALLS AND FLOORS ARE LEVEL

Figure 2

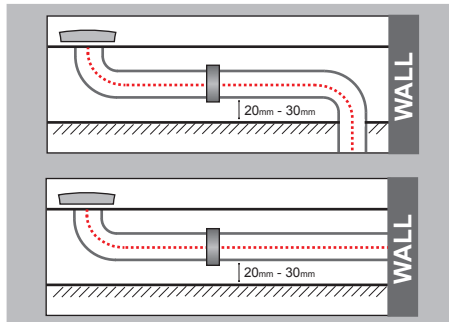


Figure 3




Figure 4

TILING

- Prior to installation it is recommended to tile both behind and below the unit, including a clearance around the unit to avoid "building in" and the unnecessary moving of the installed bathtub. See Figure 4.

NOTE: LAMINATE, VINYL & CARPET ARE NOT RECOMMENDED.

