

ShowerTablet Select
Bath thermostat 300 for exposed installation
 Finish: **White/Chrome** Article Number: **13151400**



Description


product features

- projection 192 mm
- 2 functions
- simultaneous utilization of 2 functions
- Select push-button on/off control for 2 outlets
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat cartridge, Start/stop valve to operate the functions
- maximum flow rate at 3 bar: 20 l/min
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 16 l/min
- flow rate hand shower connection at 3 bar: 16 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- protected against backflow, according to DIN EN 1717
- with silencer
- material handles: metal
- shelf made of safety glass
- surface shelf: white glass
- in case of installation on existing G ¼ connections, adaptor no.02026000 must be used
- connection dimension: DN15
- connection type: adjustable connection, G ½
- wall-mounted
- centre distance: 150 ± 12 mm
- dirt filter included
- thermostat is delivered with buttons hand shower and bath tub
- WRAS 2107043
- WRAS 2107043 - Approval letter

Article Details

Price excl. VAT 750,00 £

Technology

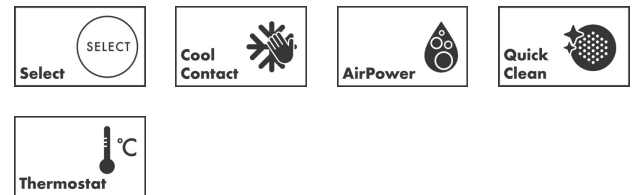

Certificates / Sustainability




ShowerTablet Select
Bath thermostat 300 for exposed installation
 Finish: **White/Chrome** Article Number: **13151400**




Product image



Scale drawing

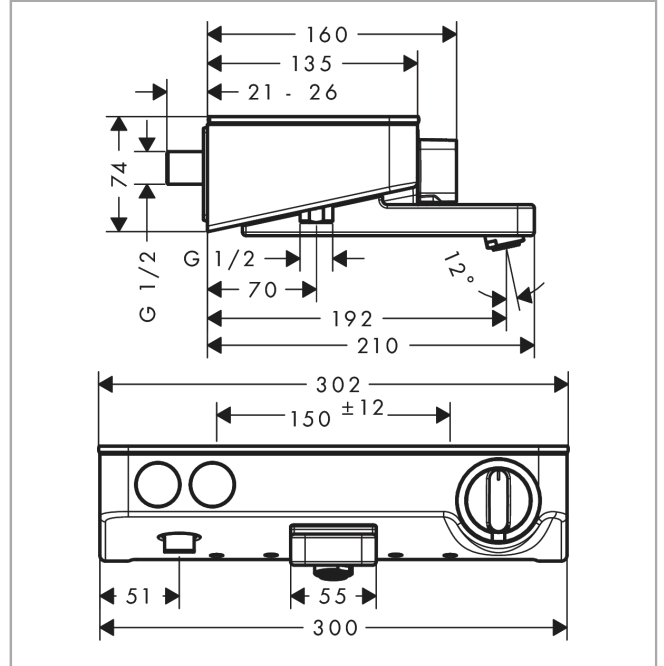

Flowchart

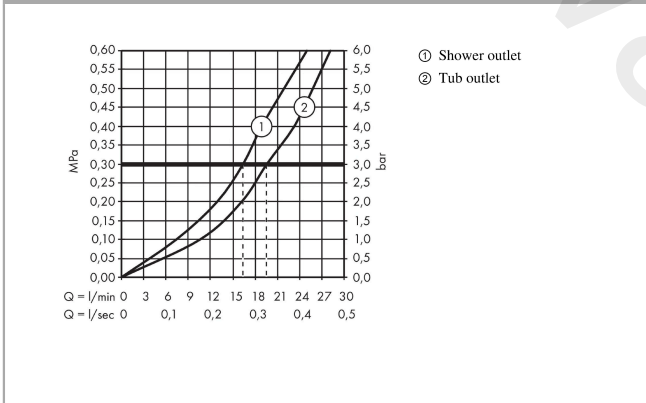


ShowerTablet Select
Bath thermostat 300 for exposed installation
 Finish: **White/Chrome** Article Number: **13151400**



Exploded Drawing

Year of production: >06/13

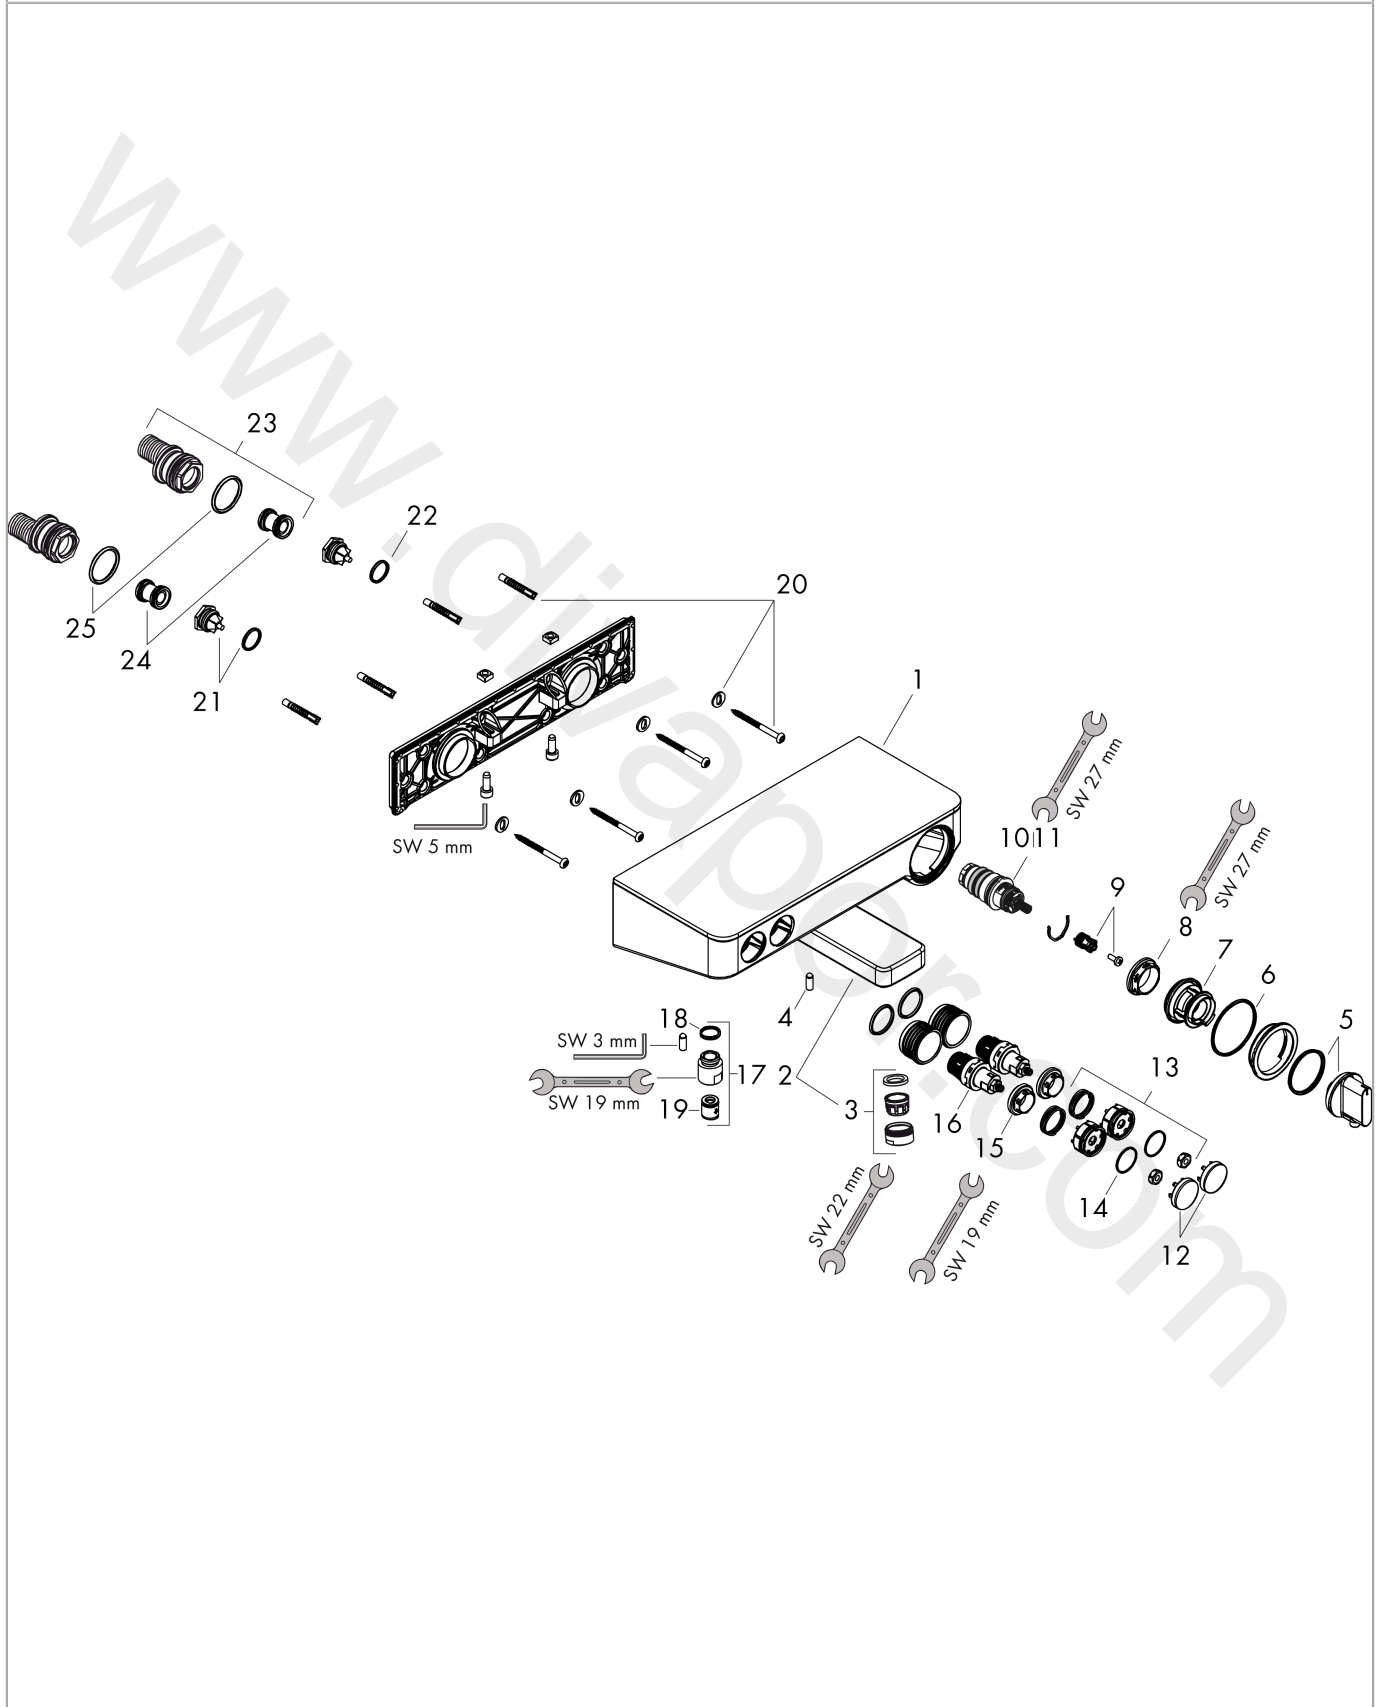

ShowerTablet Select
Bath thermostat 300 for exposed installation
 Finish: **White/Chrome** Article Number: **13151400**



Spare part list

Year of production: >06/13

Pos.	Description	Article Number	Price	PU
1	escutcheon	92163400	£ 370,00	1
2	spout cpl.	92171000	£ 370,00	1
3	aerator M24x1 (30 l/min)	96512000	£ 16,10	1
4	hollow set screw M6x16 including o-ring 29x3	98372000	£ 9,00	1
5	handle for thermostat	98369000	£ 96,00	1
6	O-ring 49x2	98412000	-	1
7	safety set	98370000	£ 6,10	1
8	nut	98913000	£ 20,50	1
9	handle fixing set	92136000	£ 20,50	1
10	thermostat cartridge	98282000	£ 110,00	1
11	cartridge for exchanged connections	92373000	£ 275,00	1
12	set of symbols	98367000	£ 51,00	1
13	spring with sleeve	92340000	£ 13,30	1
14	O-ring 20x1	98140000	£ 3,30	1
15	nut	98368000	£ 13,30	1
16	shut off unit	95758000	£ 110,00	1
17	Hose Connection	96044000	£ 25,00	1
18	O-ring 14x2	98129000	£ 3,30	1
19	set of non return valves DW 15	94074000	£ 16,10	1
20	mounting set	96179000	£ 13,30	1
21	non return valve (pressure-resistant up to 2 MPa)	95773000	£ 35,00	1
22	O-ring 17x2	98199000	£ 3,30	1
23	set of S-unions	95772000	£ 96,00	1
24	noise reduction	96429000	£ 6,10	1
25	O-ring 29x3	98371000	£ 6,10	1
a	adapter for ball S - union	02026000	£ 51,00	1
b	ball s-unions with escutcheon	98293000	£ 830,00	1
c	shut off unit (special)	92361000	£ 110,00	1