

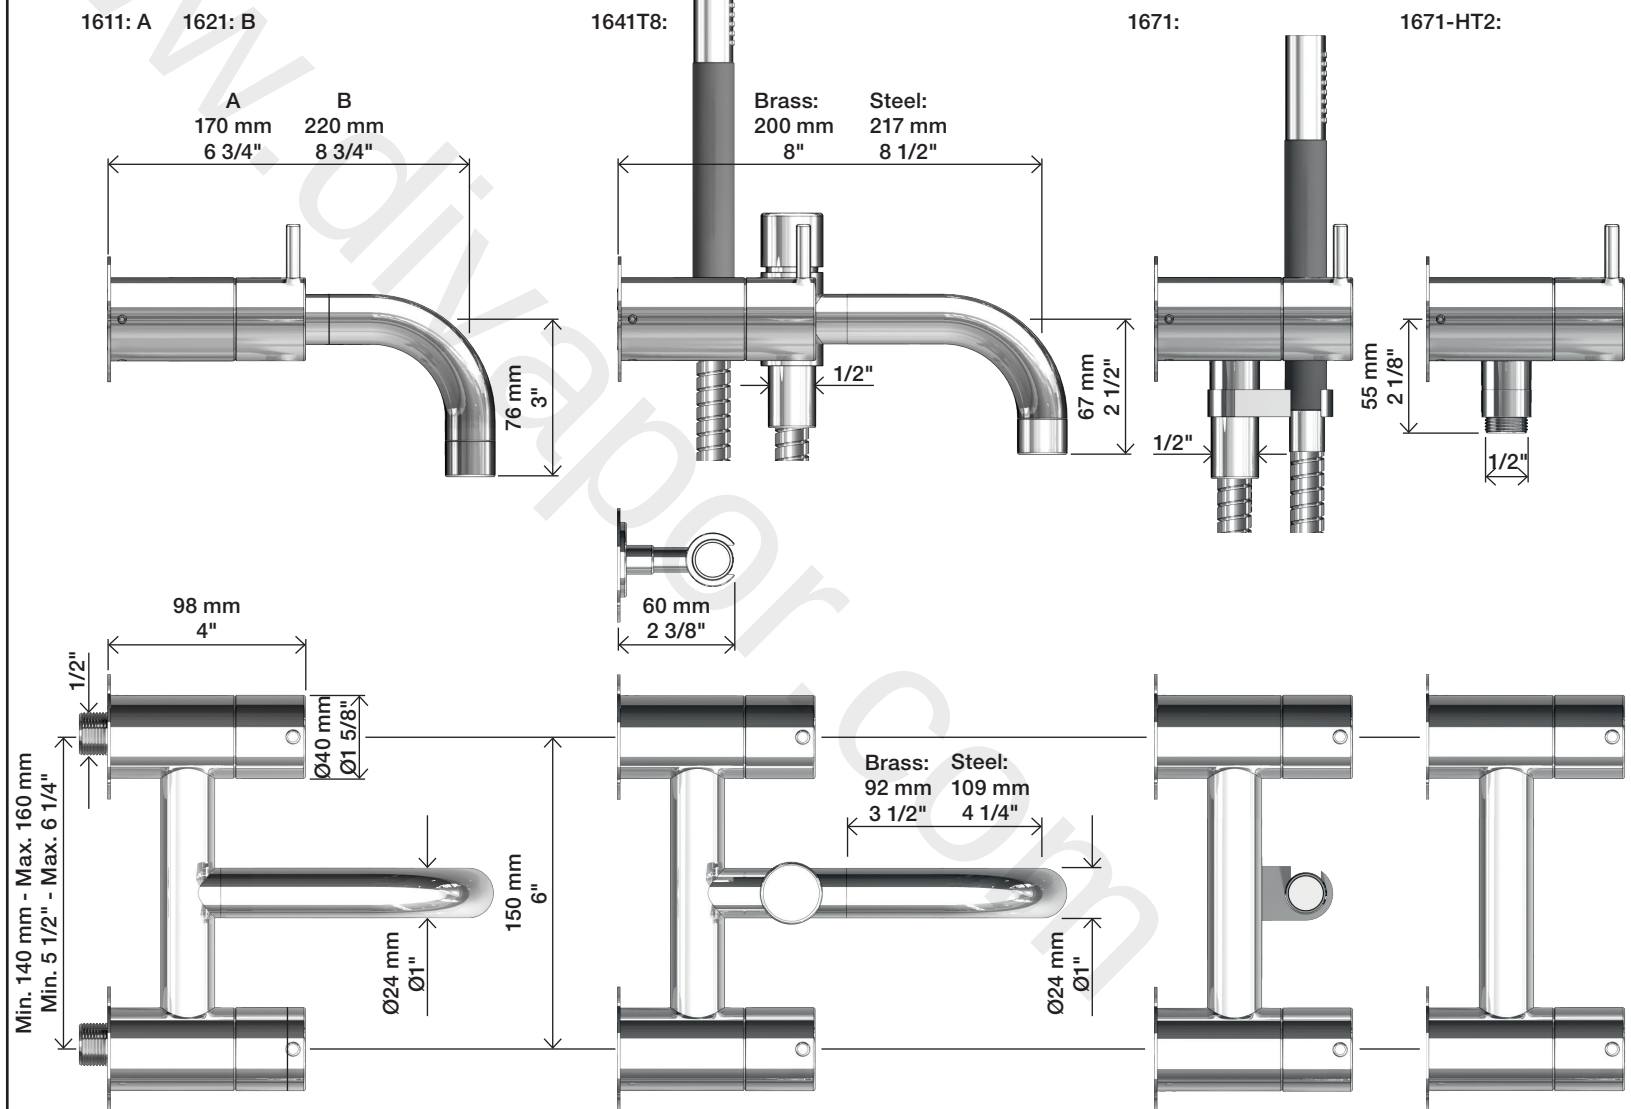
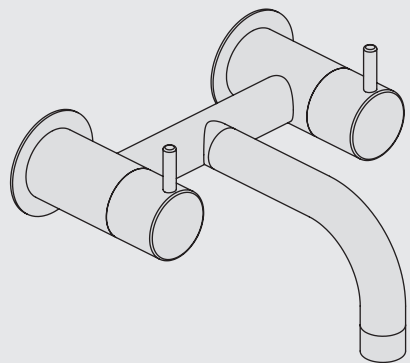
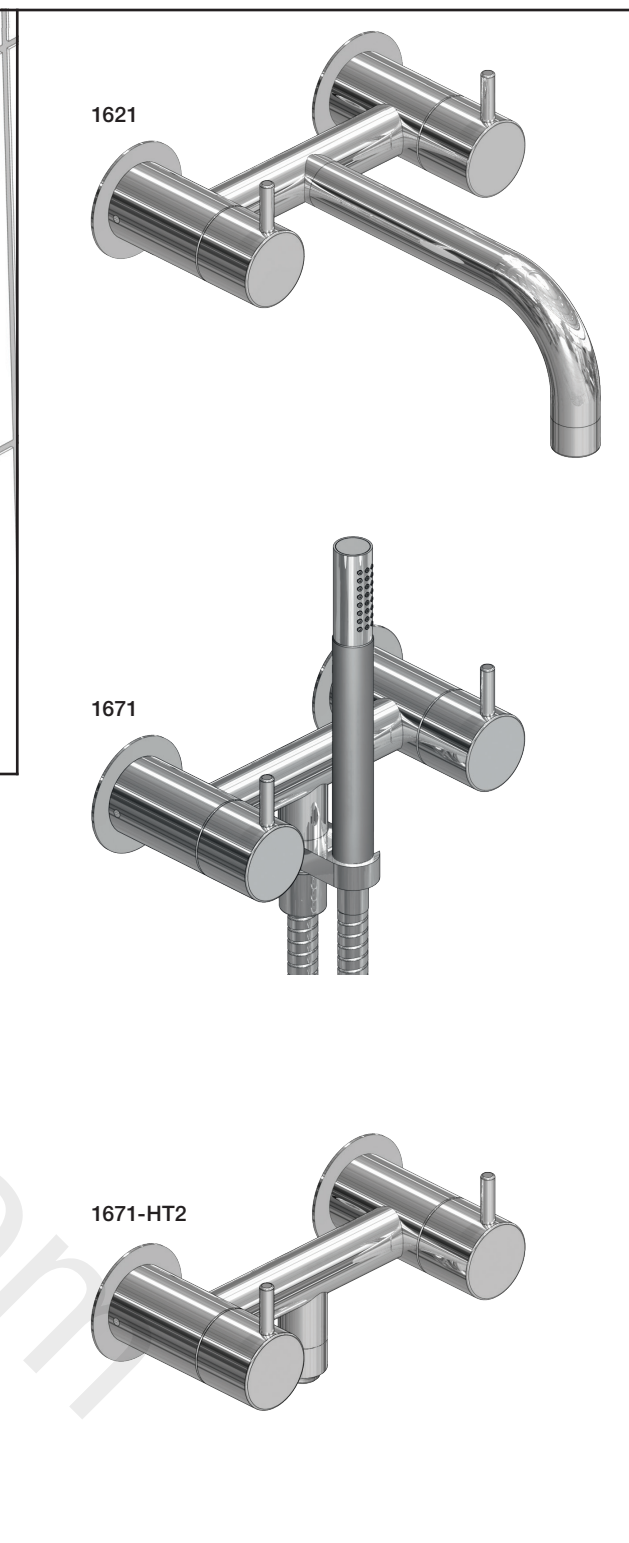
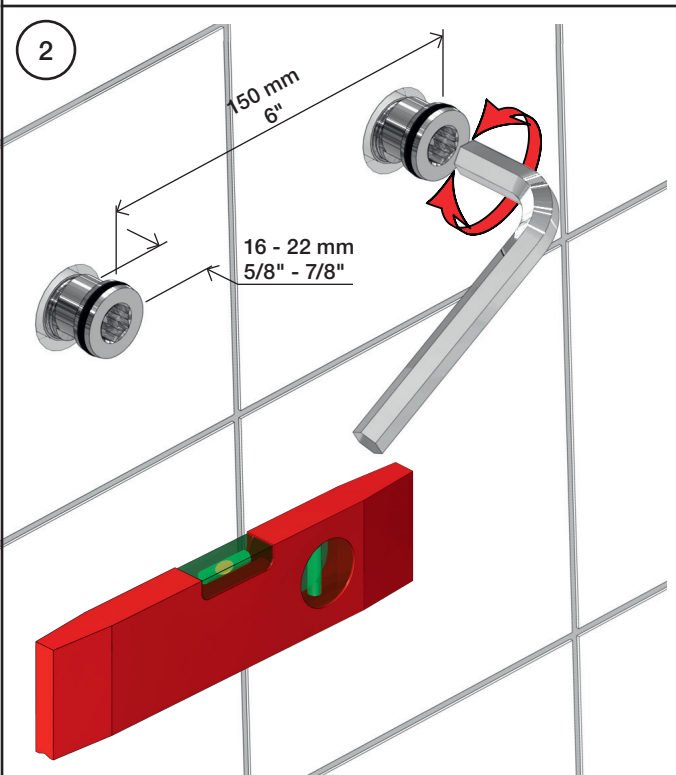



VOLA 1671, 1671-HT2

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvågledning
Montage hanleiding
Manuel de montage


Data	Bar:	1	2	3	4	5
1611/1621	l/min Gal/min	13.4 3.5	18.9 5.0	23.2 6.1	26.8 7.1	30.0 7.9
1641	l/min Gal/min	11.4 3.0	16.2 4.3	19.8 5.3	22.9 6.1	25.6 6.8
1641 - T2	l/min Gal/min	6.6 1.74	9.4 2.5	11.5 3.0	13.3 3.5	14.8 3.9
1671 - T2 1671-HT2	l/min Gal/min	9.9 2.6	14.0 3.7	17.2 4.5	19.9 5.3	22.2 5.9
	Max. 65°C. 150°F					

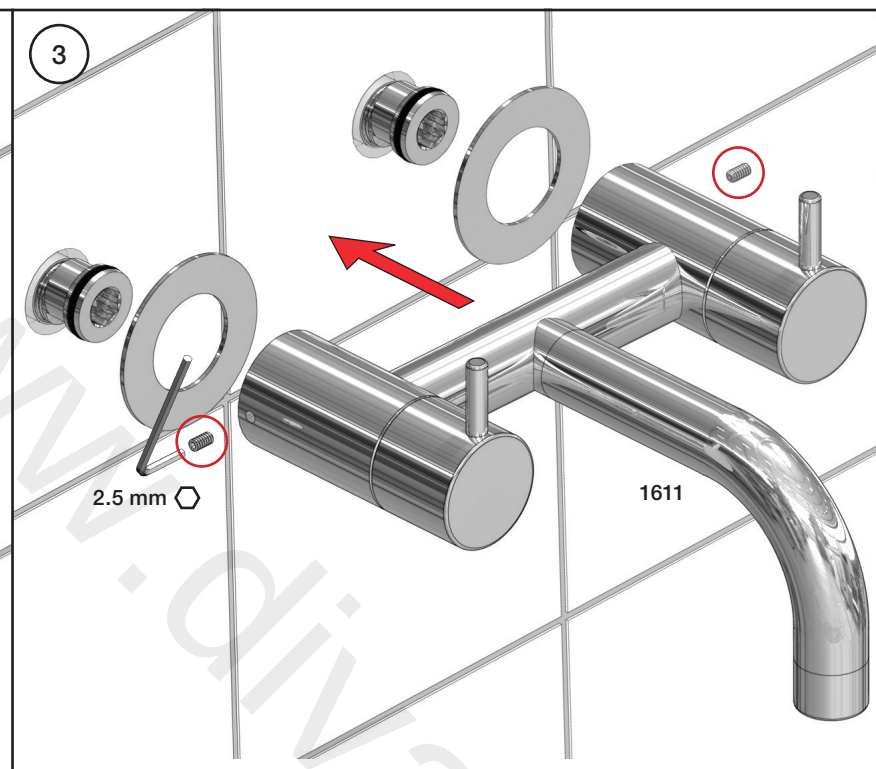

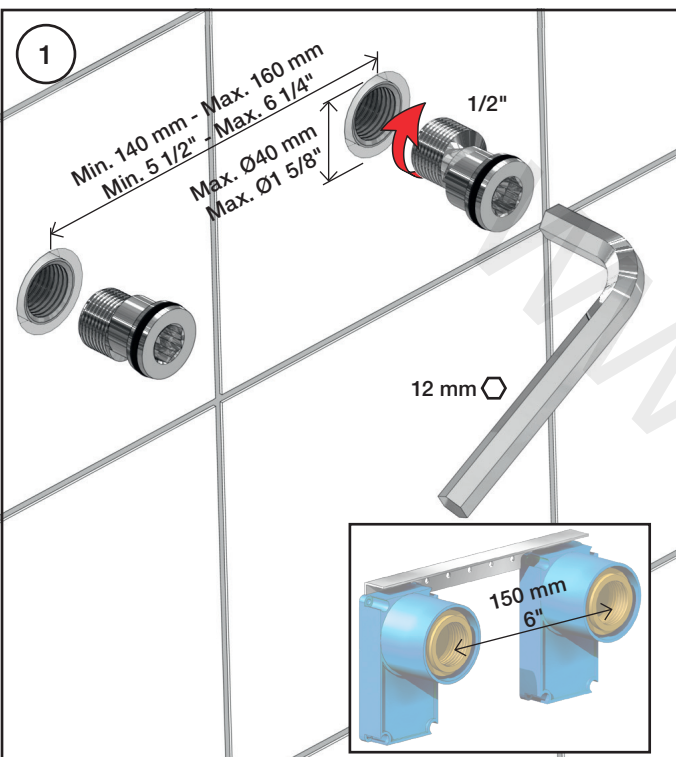


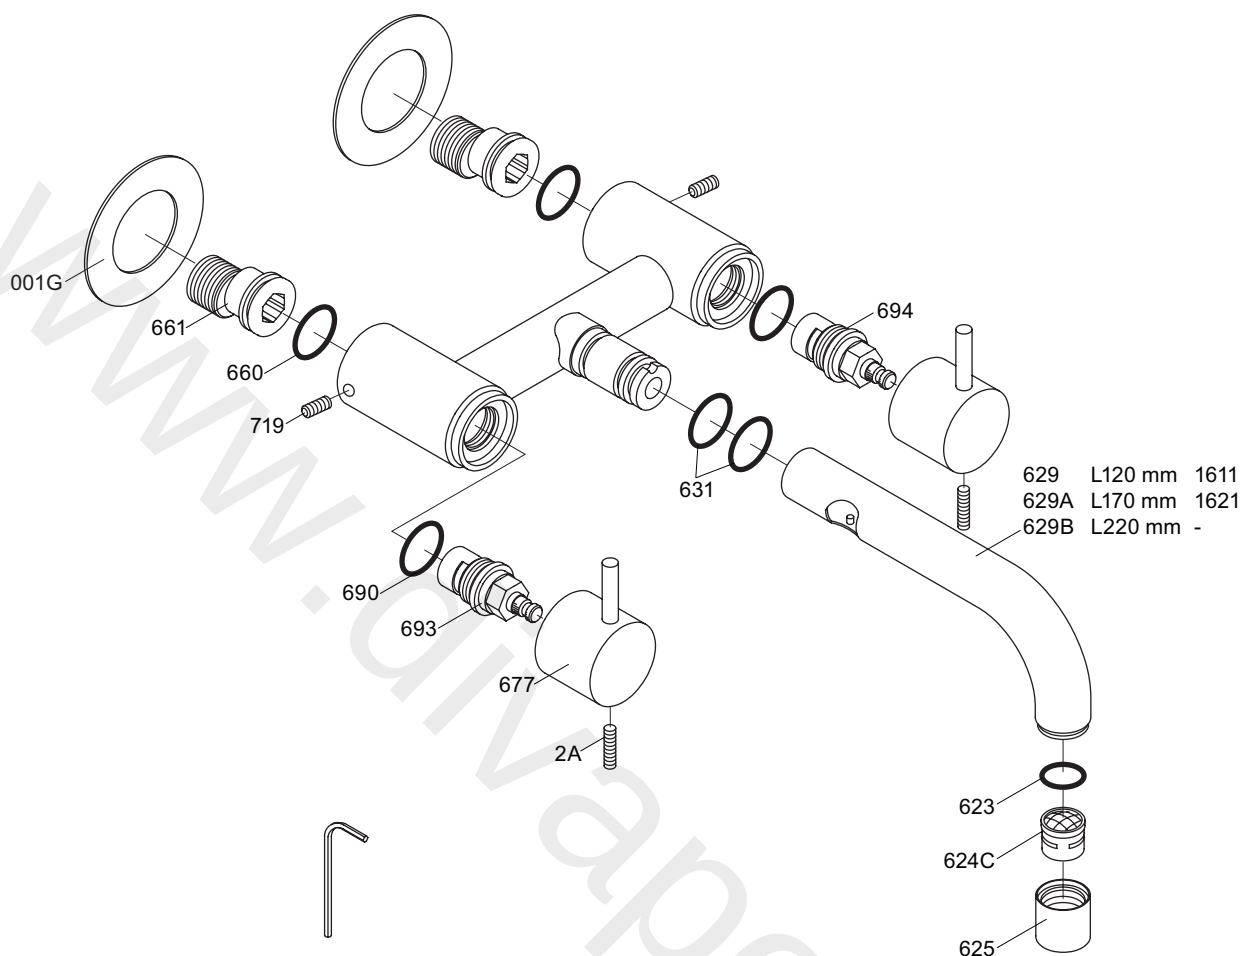

1611



1621



VR090D/C: VR623, VR624C, 4xVR631, VR1902



vola®

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 1611/1621

Date
Jan. 96

Rev.
1

Sheet
SB 49