




 **GODKENDT
TIL DRIKKEVAND**



voilà

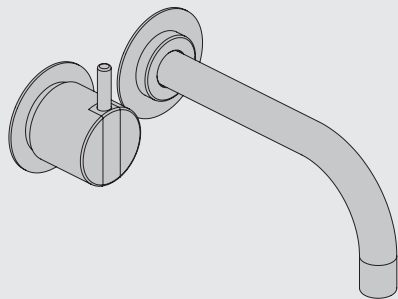


©



D



PEX1

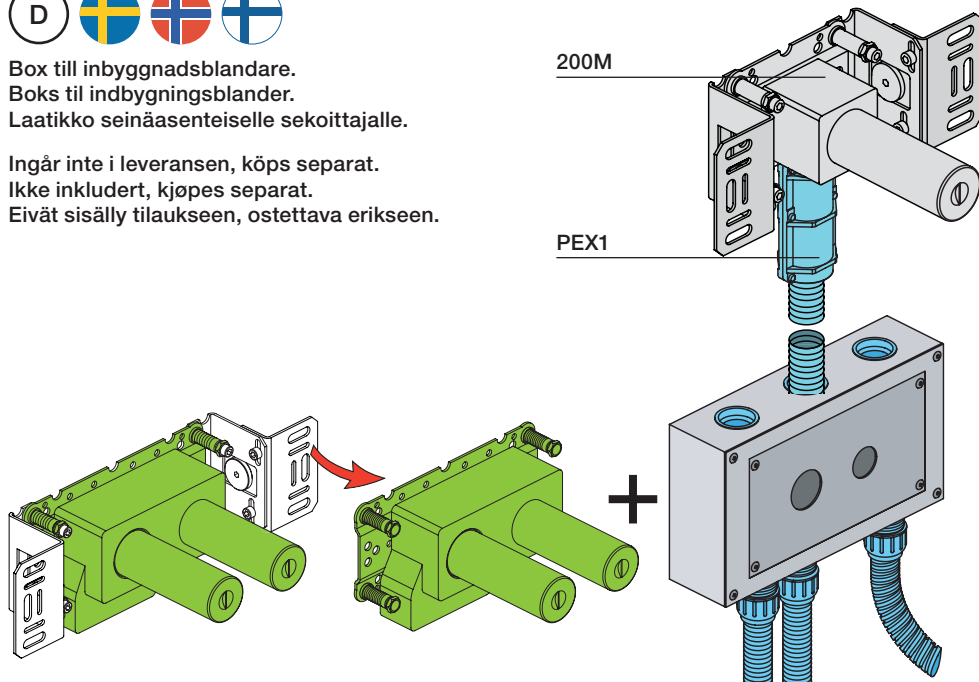

VR968


A

Max.: 10 Bar/145 psi

B



**!DO NOT!
!REMOVE!**



VR1260

VR2260




Diagram illustrating the standard extension cord configuration. The cord is divided into three sections: a blue section labeled "STANDARD", a yellow section labeled "EXTENSION" with markings for +10, +20, +30, +40, and +50, and a red section labeled "DO NOT REMOVE". A dimension line labeled "Y" indicates the length of the extension section. A ruler below the cord shows the total length is 10 feet.

	X	VR1260 + VR1400 + VR2019
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

Fitting of extension
Montage von verlängerung
Montering af forlængerdele

Montering av förlängning
Montage van de verlengstukken
Montage des rallonges

VR269

VR2269

18 mm

26 mm



2x13 mm Lightweight wall
Leichtwand
Let væg




Lätta konstruktion
Holle wandconstructie
Construction légère



1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère




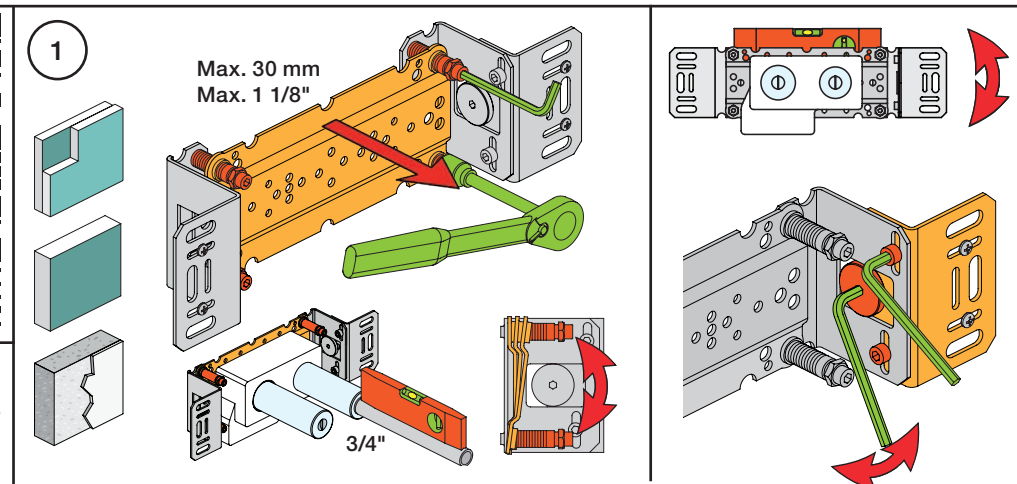
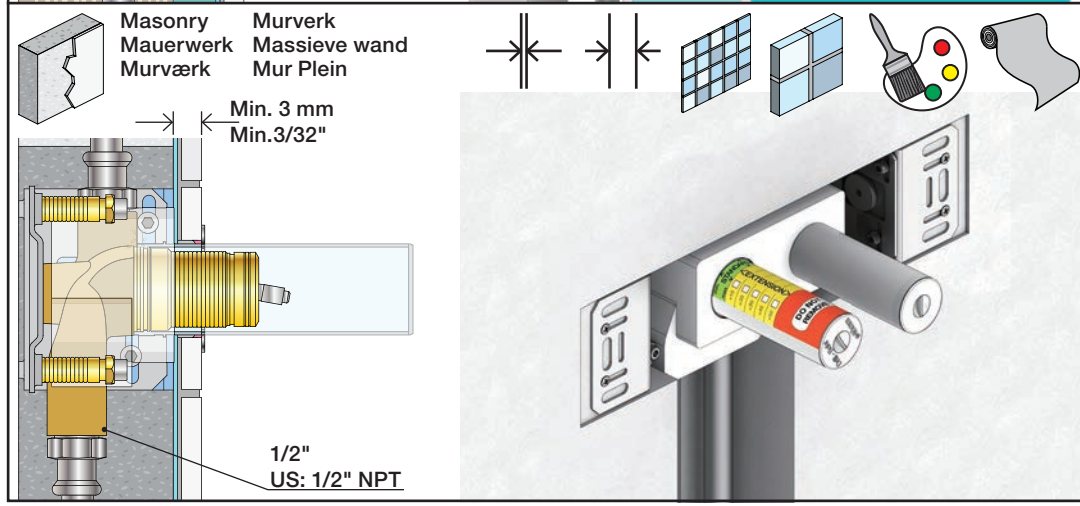
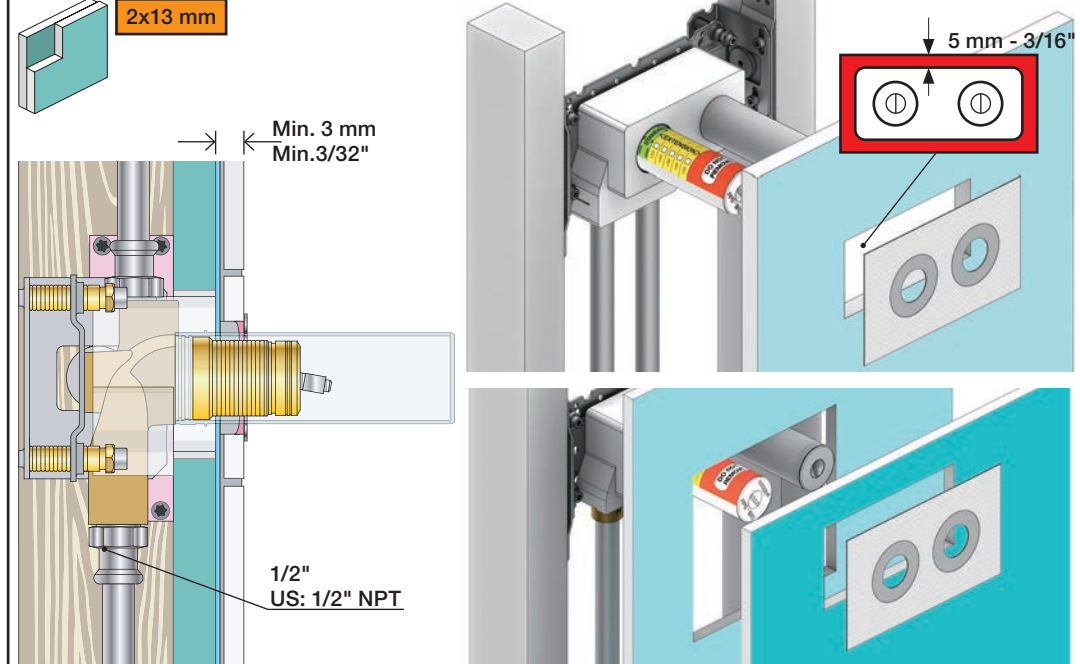


2

Test Pressure
Prüfdruck
testtryk
Test tryk
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau !
! MAX 1 Minute - Minut - Minuut !

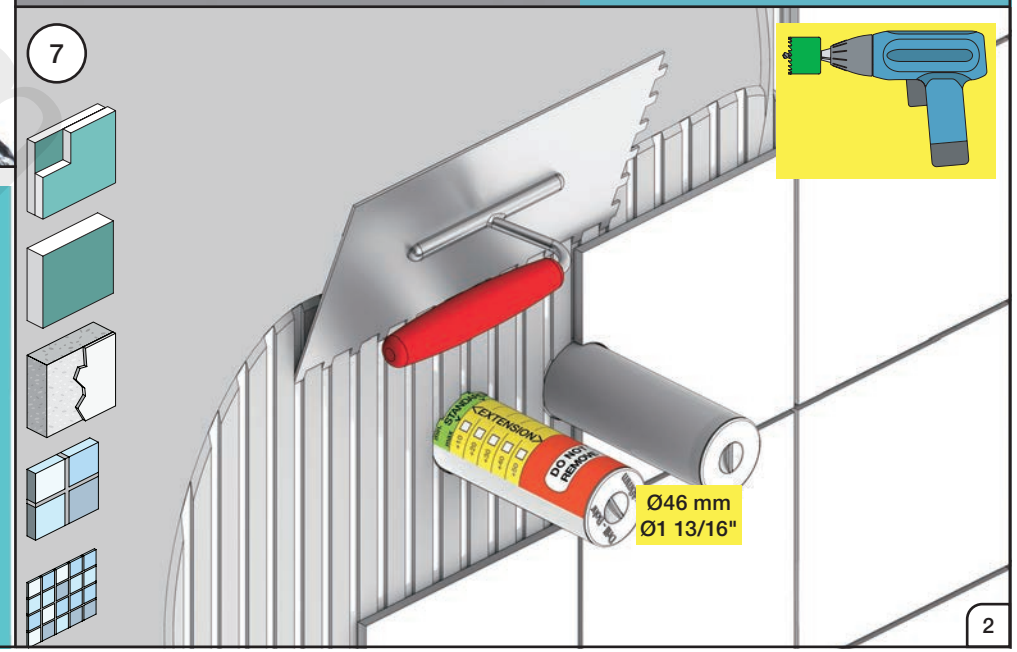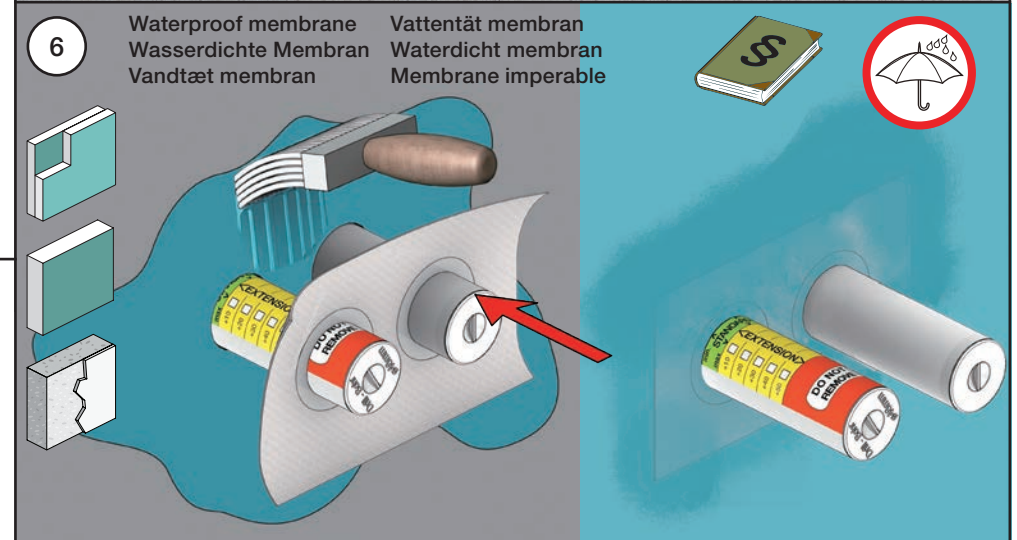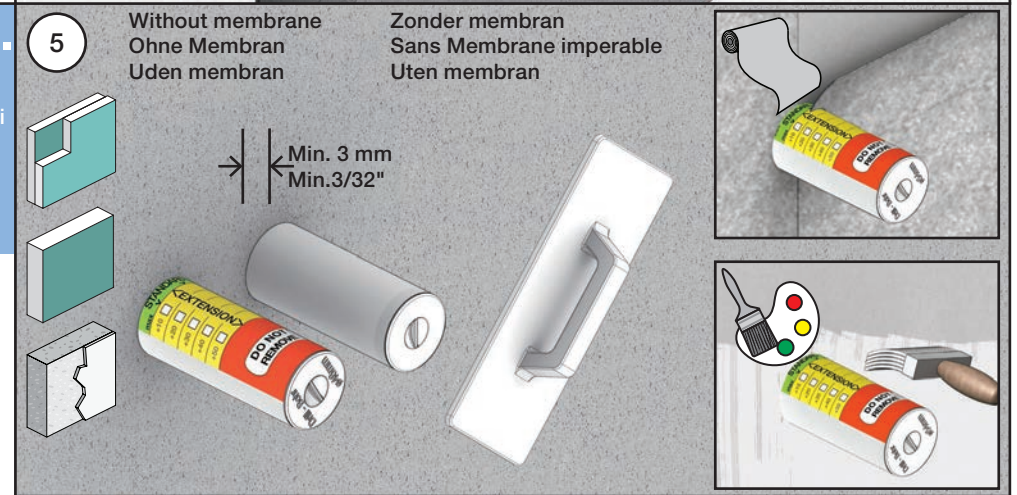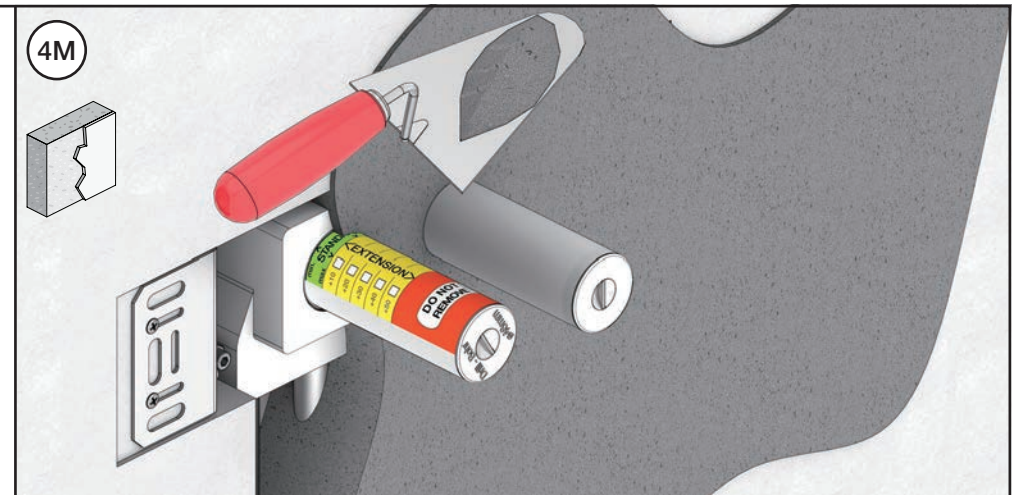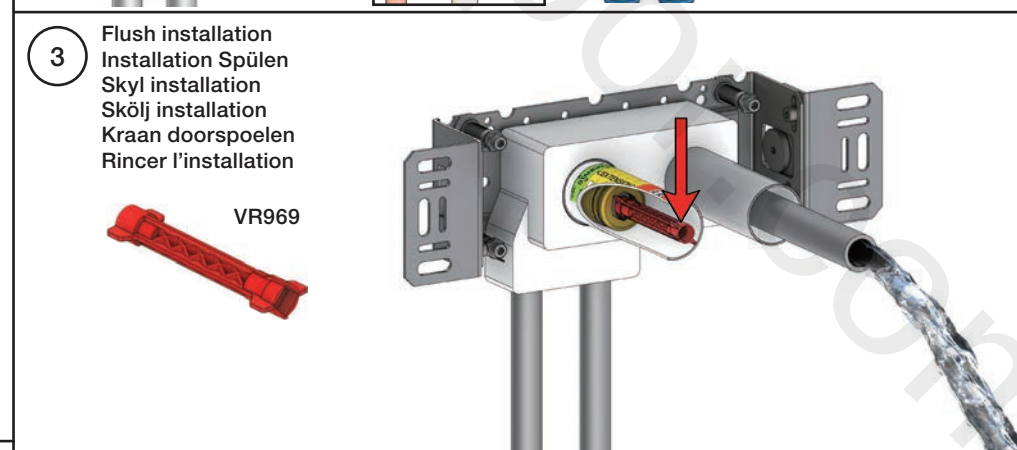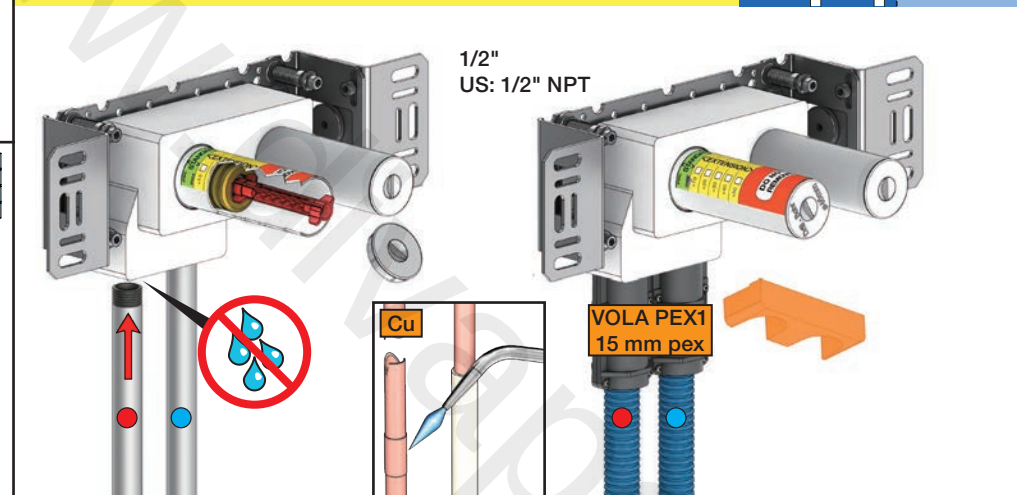

VOLA 200M

Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsvægledning
Montage hanleiding
Manuel de montage

www.vola.com

200M_V4_40998506
25-11-2022

5 705230 288055

Max.: 10 Bar/145 psi

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

Max. 65°C, 150°F

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten

Box till inbyggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

G1/2"

Skvallerrör

Extension
Verlängerung
Forlængerdele
Förlängning
Verlængstukken
Modification

min.	STANDARD	min.
max		max
+10	☐	+10
+20	☐	+20
+30	☐	+30
+40	☐	+40
+50	☐	+50

DO NOT REMOVE

VR2019: 010, 020, 030, 040

VR2021: 050

VR2020: 080W

VR2119: 010C, 020C, 040D
050K, 070/R/S/W, 080/K/D/DK

VR2219: 050A, 060A

VR648: 060, 080ST

VR2019, VR2119
VR2020, VR2219
VR2021

* +10 - STANDARD SVERIGE

T Min. 3 mm
Max. 65 mm

Y Min. 48 mm
Max. 110 mm

T: VR2019/2020/2021/2119/2219	T: VR648	Y	
3 - 15 mm	3 - 19 mm	110 - 98 mm	Std.
15 - 25 mm	17 - 28 mm	98 - 88 mm	+10
25 - 35 mm	27 - 38 mm	88 - 78 mm	+20
35 - 45 mm	37 - 48 mm	78 - 68 mm	+30
45 - 55 mm	47 - 58 mm	68 - 58 mm	+40
55 - 65 mm	57 - 68 mm	58 - 48 mm	+50

Installation example
Installationsbeispiel
Installatie voorbeeld
l'installation des exemple

Fitting of extension
Montage von verlängerung
Montering af forlængerdele
Montering av förlängning
Montage van de verlængstukken
Montage des rallonges

VR2019+, VR2119+
VR2020+, VR2219+
VR2021+

12 mm

VR648+

24 mm


VOLA A/S • Lunavej 2 • DK-8700 Horsens • Tel. +45 7023 5500 • Fax +45 7023 5511 • sales@vola.dk • www.vola.com

vola



2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

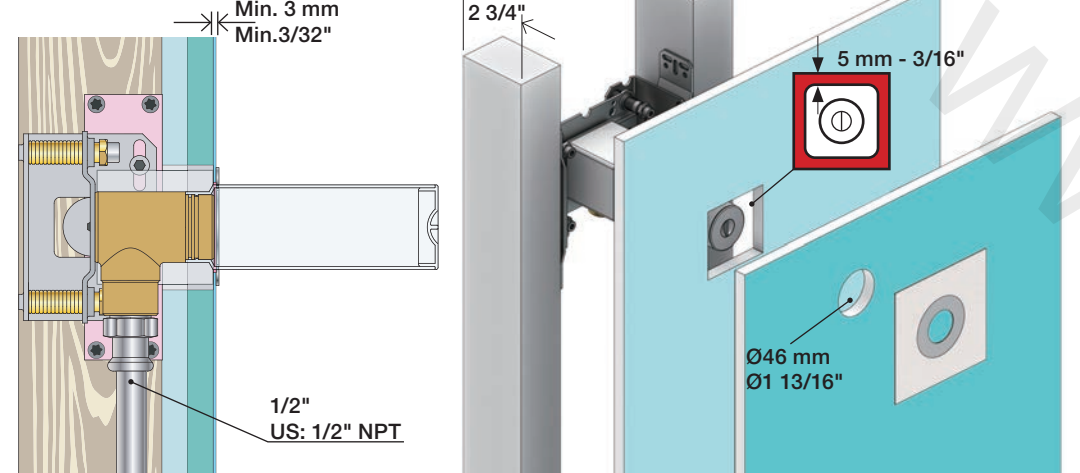

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein








2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression


Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

1. MAX. 16 Bar 232 Psi
2. MAX. 4 Bar 58 Psi

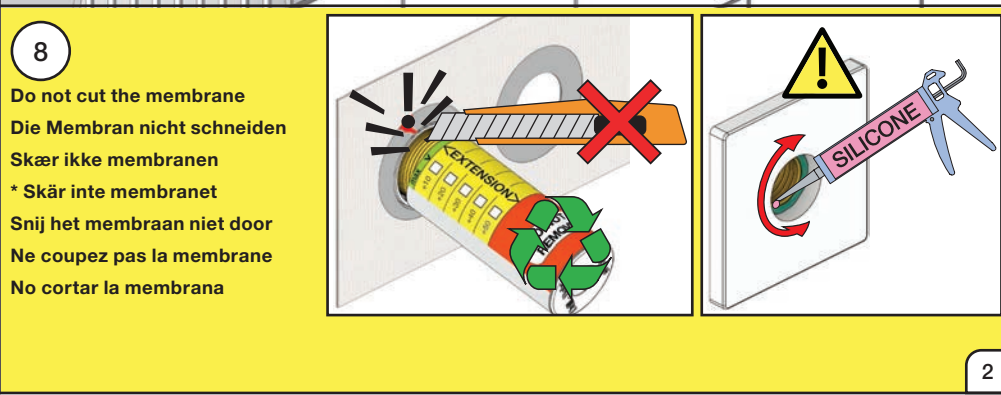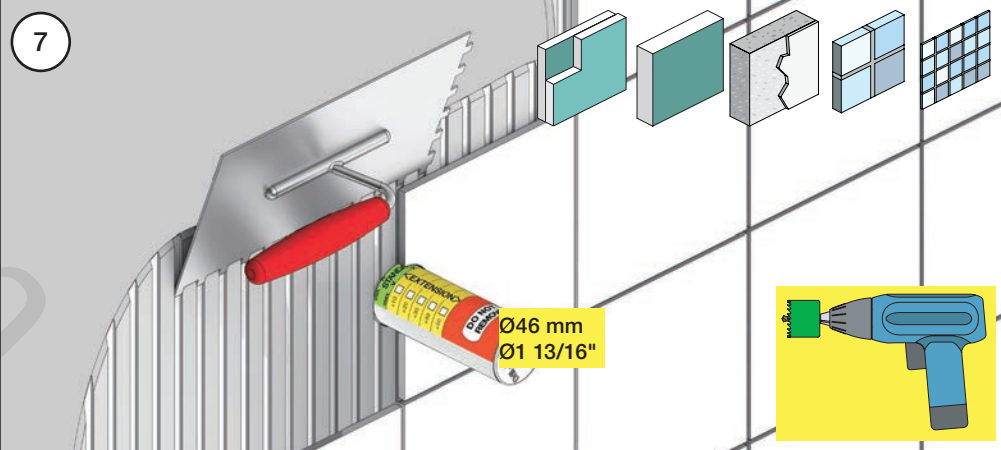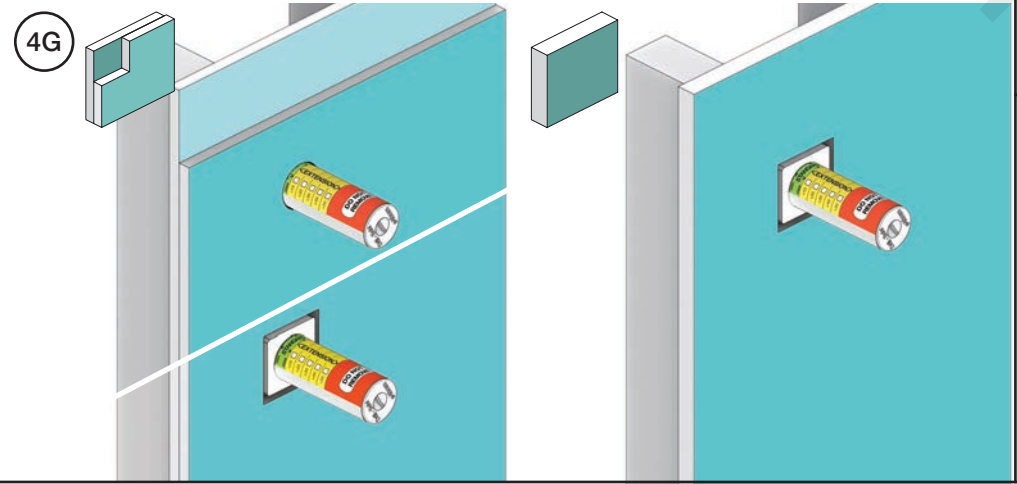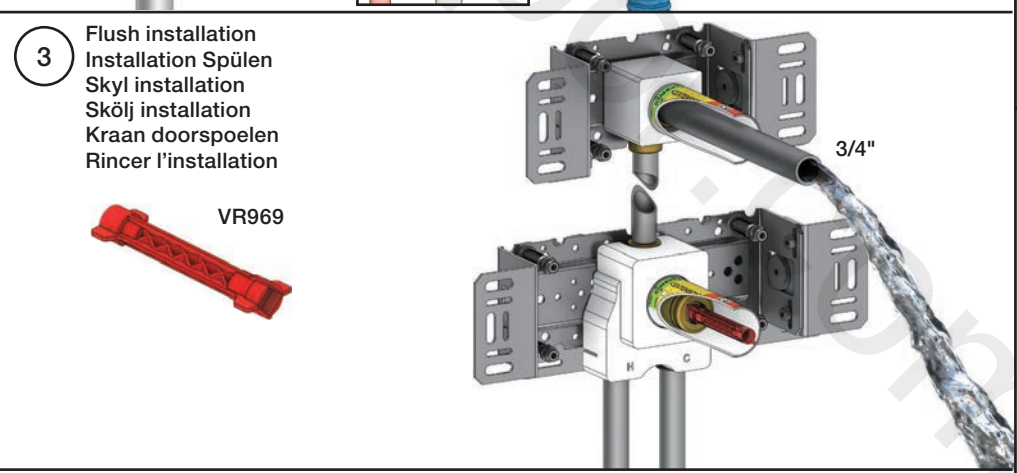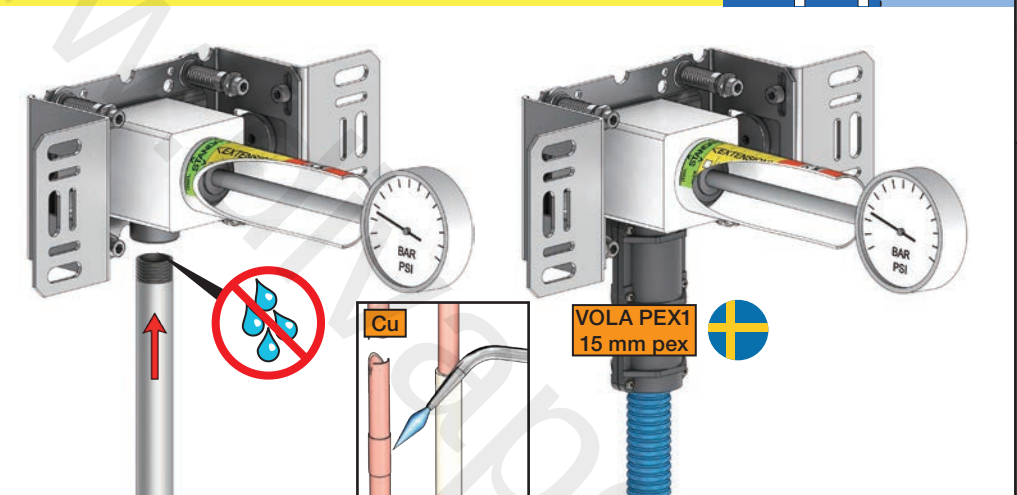


2400V

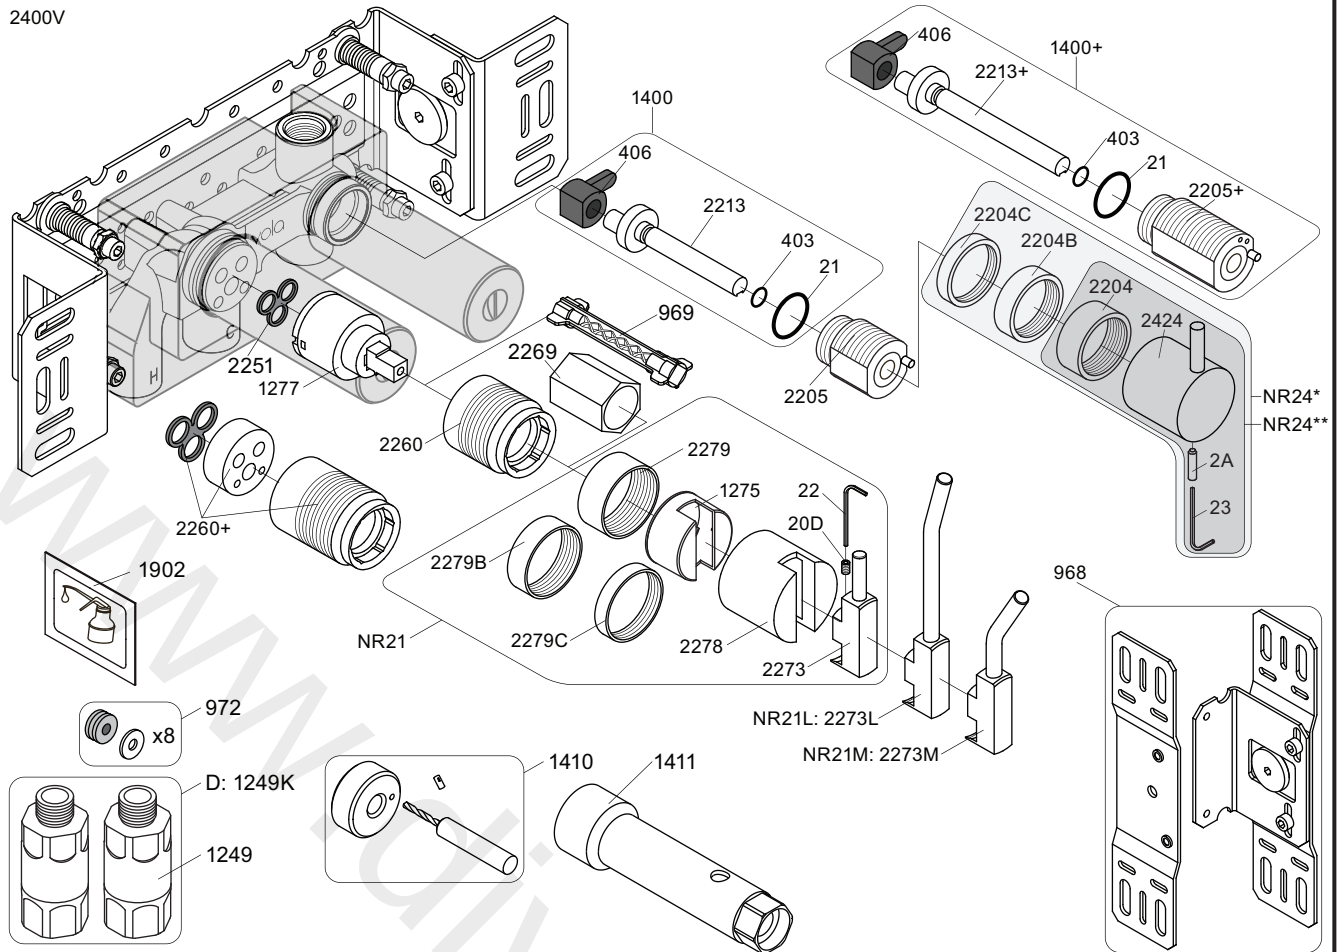


NR21: VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
 NR24*: VR2A, VR22, VR1419, VR2204, VR2204B, VR2204C - (Brass, Messing, Laiton)
 NR24**: VR2A, VR22, VR1419, VR2204 - (Stainless steel, Edelstahl, Rustfrit stål, Acier inoxydable)
 VR1277K: VR22, VR2269, VR1277
 VR1400: VR21, VR23, VR406, VR1902, VR2213



2400V

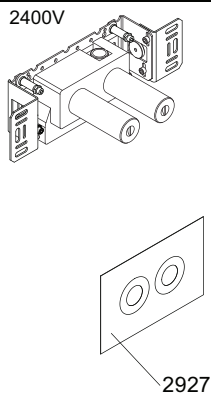


2400NV

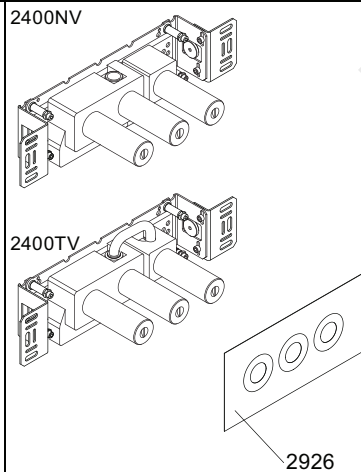


2400FV

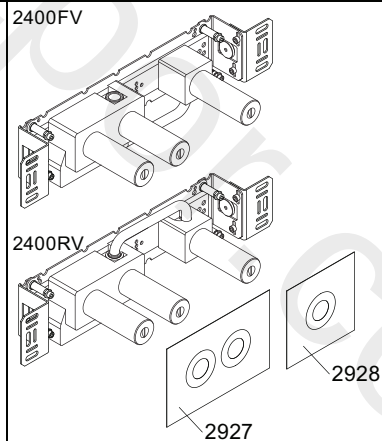


1040



2003K



2004



2003



2001, 001G



2001, 001G, 001



2001, 001G, 001




vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 2400
 2400V/FV/NV/RV/TV

Date
 May. 22

Rev.
 5

Sheet
 SB 10.10

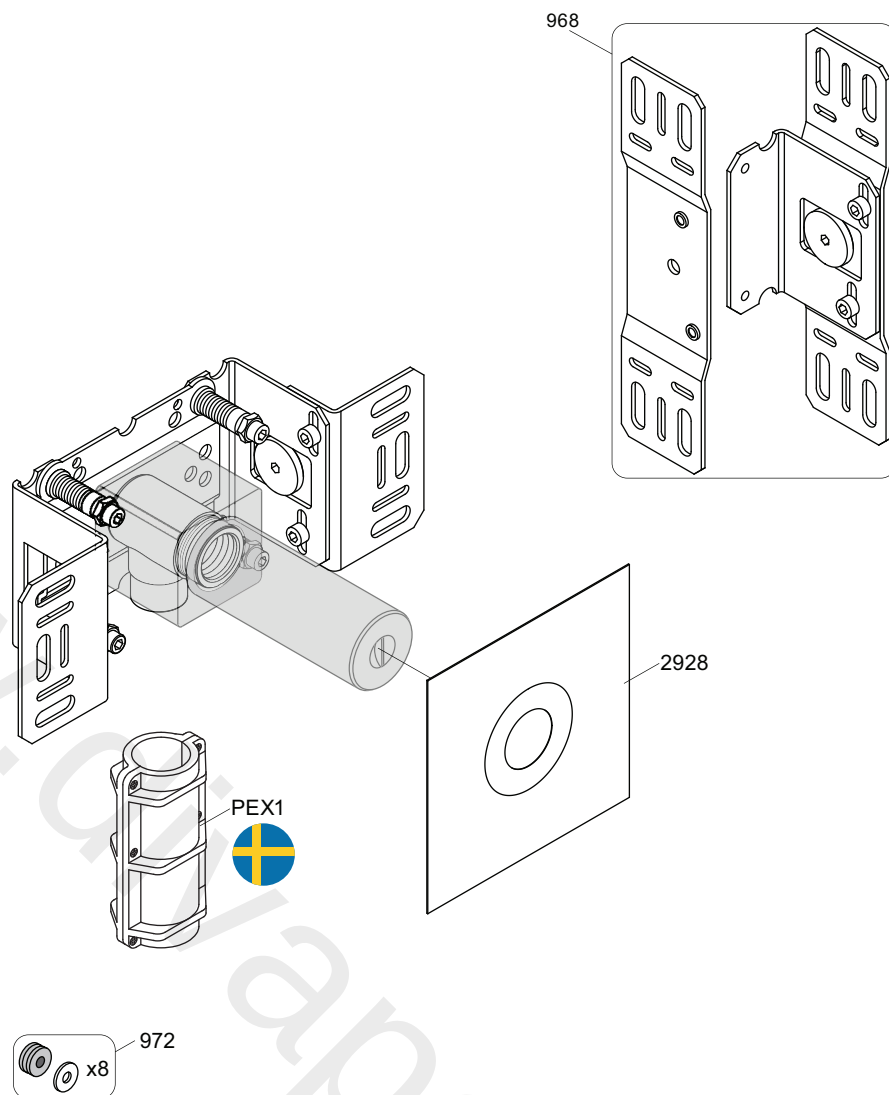

vola

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 200M

Date
May. 22

Rev.
3

Sheet
SB 2.3