

VOLA 080, 080D, 080DK, 080K, 080W

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

Data	Bar:	1	2	3	4	5
081/081K	(l/min)	8	12	14	17	19
	(Gal/min)	2.1	3.2	3.7	4.5	5.0
081D	(l/min)	14	20	25	29	32
	(Gal/min)	3.7	5.3	6.6	7.7	8.5
080W	(l/min)	23	33	40	46	52
	(Gal/min)	6.1	8.6	11	12	14
 Max. 65°C. 150°F						



VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min



VR161K




VR161D




VR161F

080W: Min. flow: 14 l/min - 3.7 Gal/min.

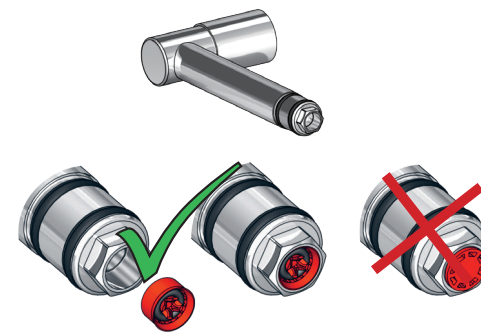


080

130 mm
5"

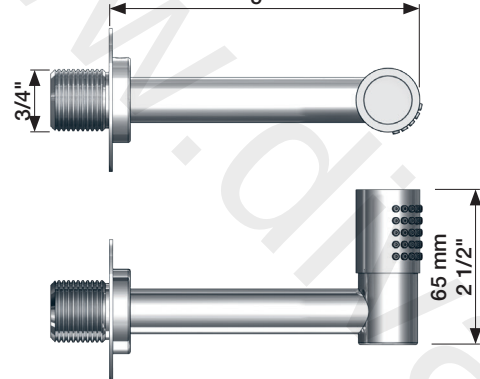


080D

130 mm
5"

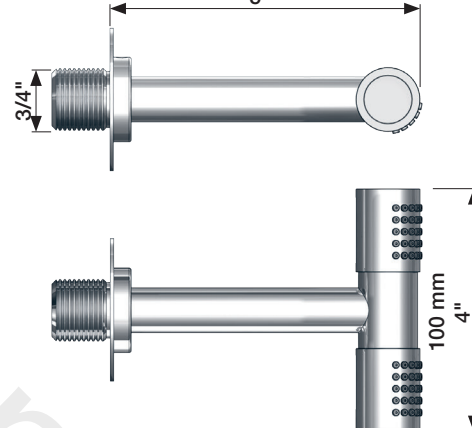


080DK

60 mm
2 3/8"

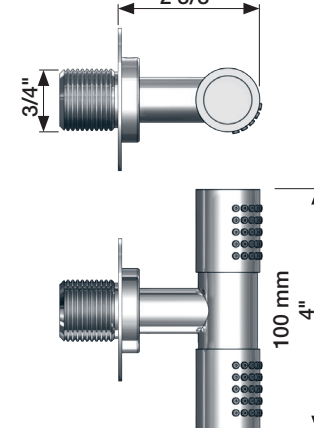


080K



60 mm
2 3/8"

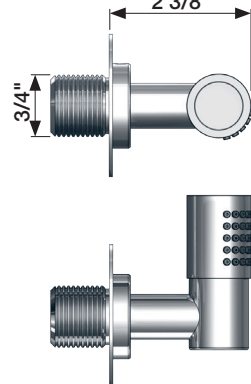


080W

270 mm
10 5/8"

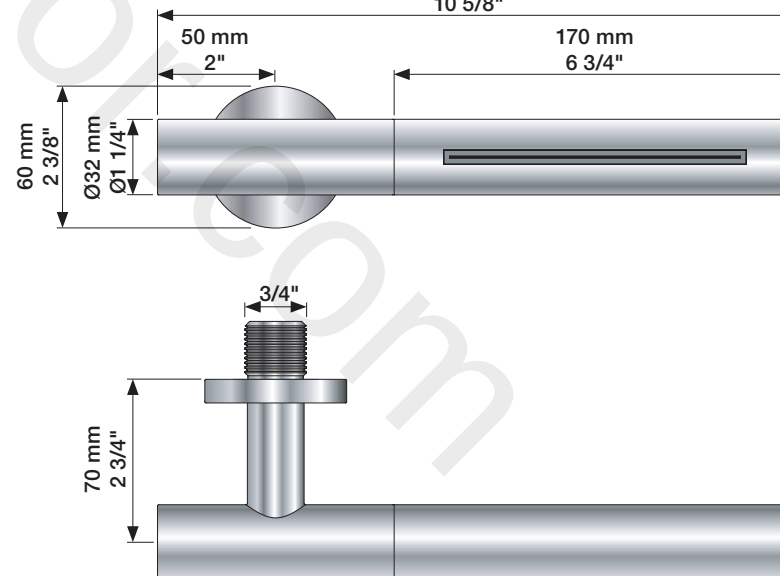

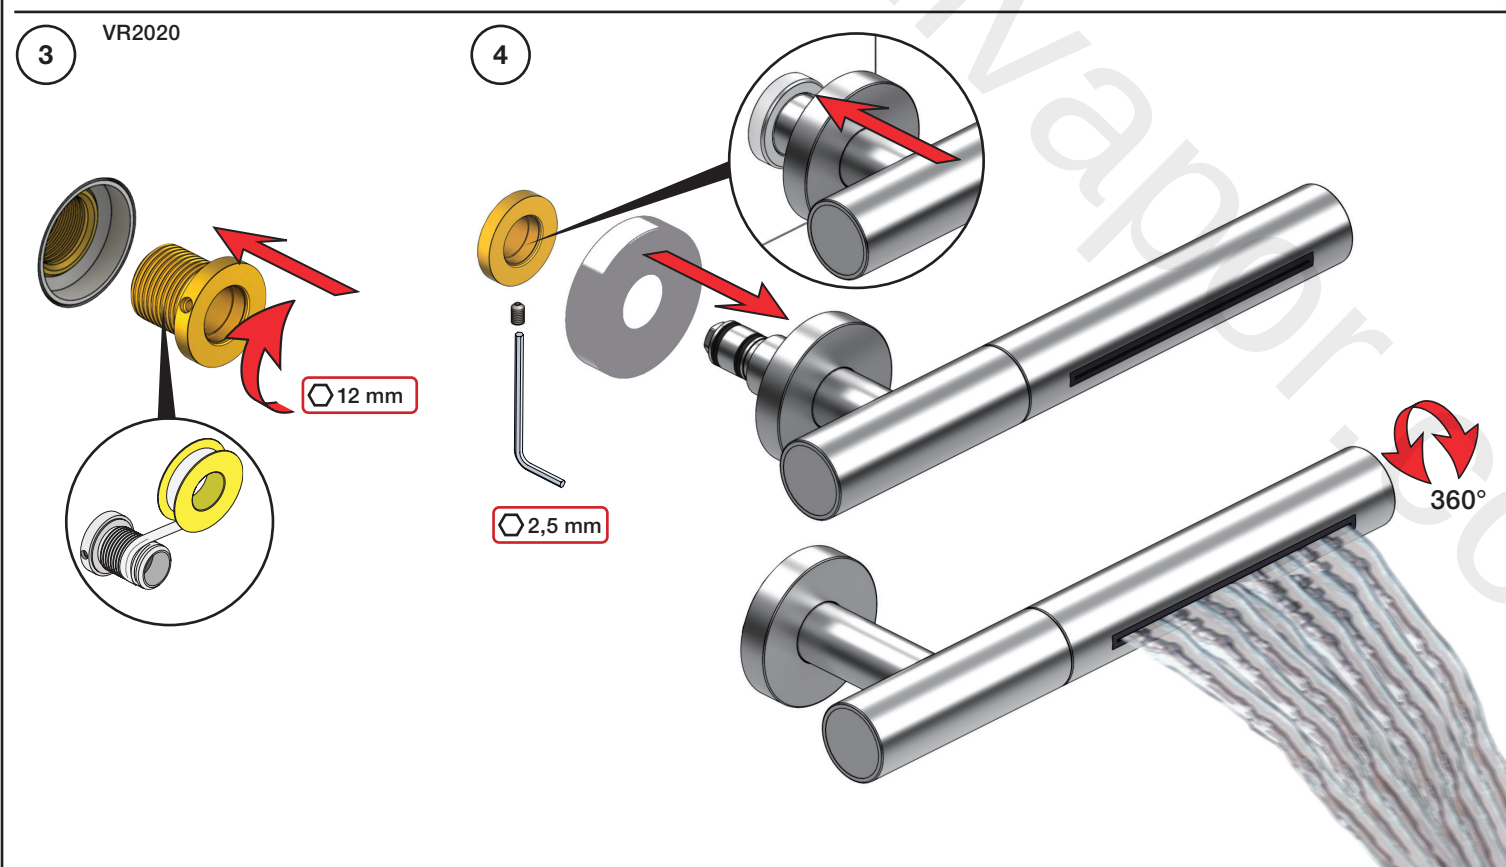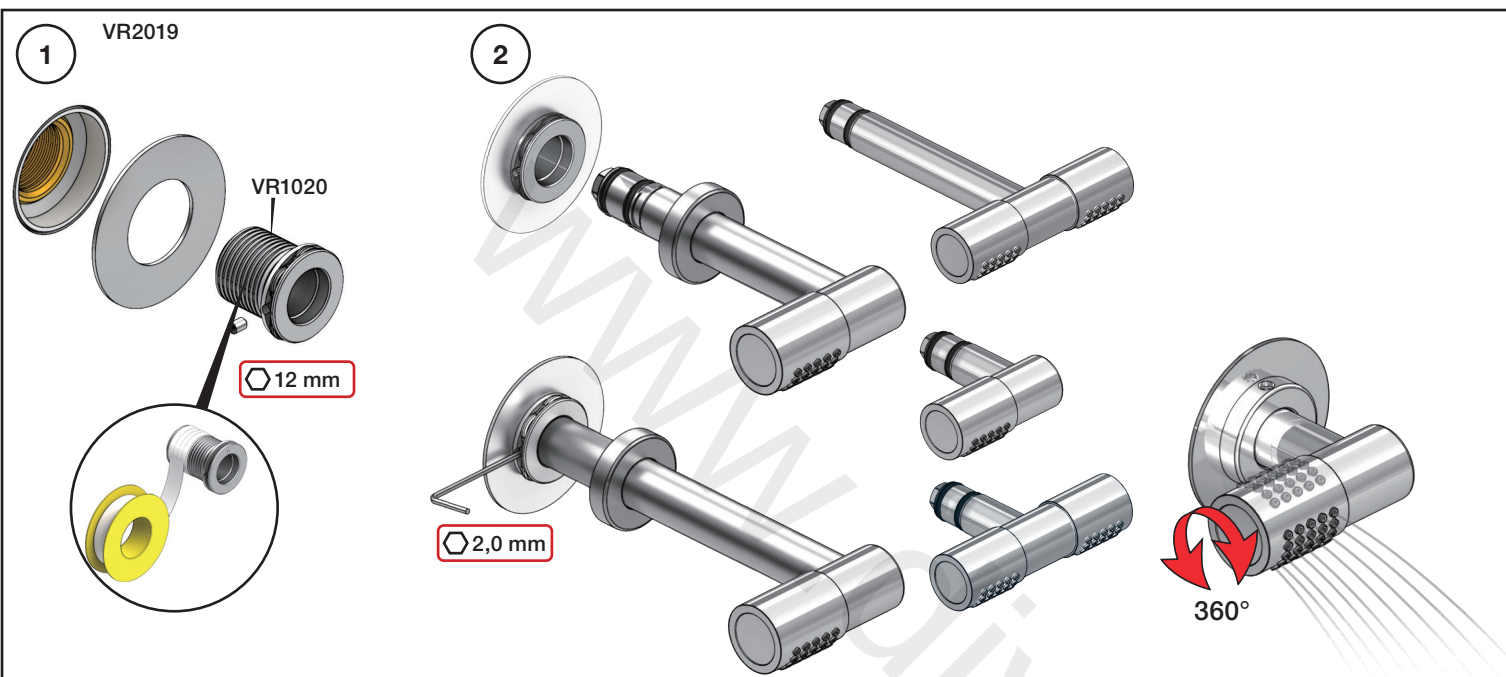


Extension Verlängerung	Forlængerdele Förlängning	Verlængstukken Modification
T Min. 3 mm Max. 65 mm	Y Min. 48 mm Max. 110 mm	
T	Y	VR2019/2020
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

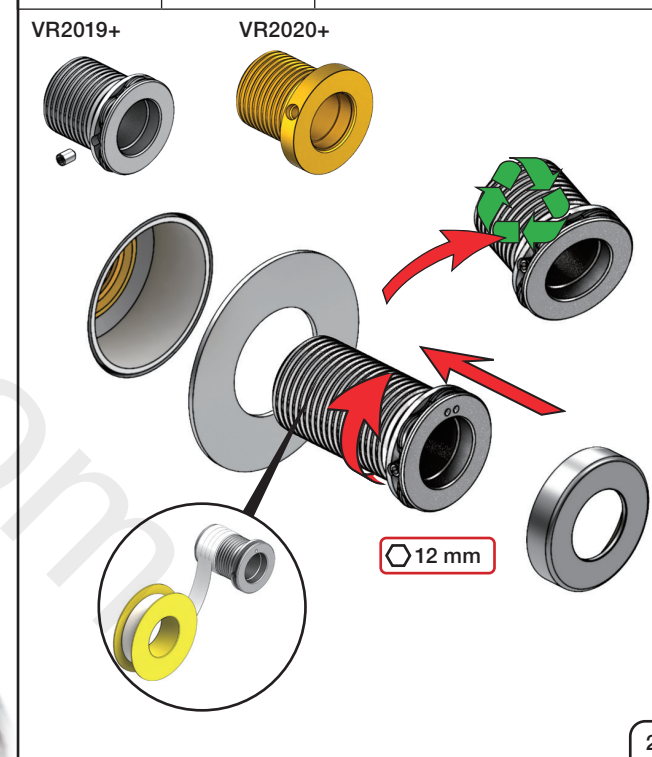

VOLA 050, 050A, 050K

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

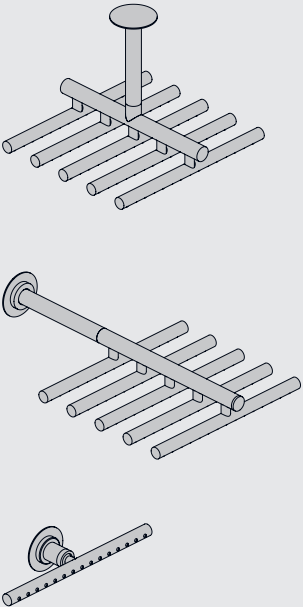


Data	Bar:	1	2	3	4	5
051	(l/min)	13	19	23	26	30
051A	(Gal/min)	3.5	5.0	6.1	7.0	7.8
051K	(l/min)	5	5	5	5	5
	(Gal/min)	1.3	1.3	1.3	1.3	1.3
Max. 65°C. 150°F						




VR161 - 050, 050A:
VR161B: 6 l/min - 1.6 Gal/min
VR161K: 7 l/min - 1.8 Gal/min
VR161D: 9 l/min - 2.5 Gal/min
VR161F: 14 l/min - 3.7 Gal/min




USA:
Max. flow rate:
1.6 Gal/min.
6.0 l/min.




050

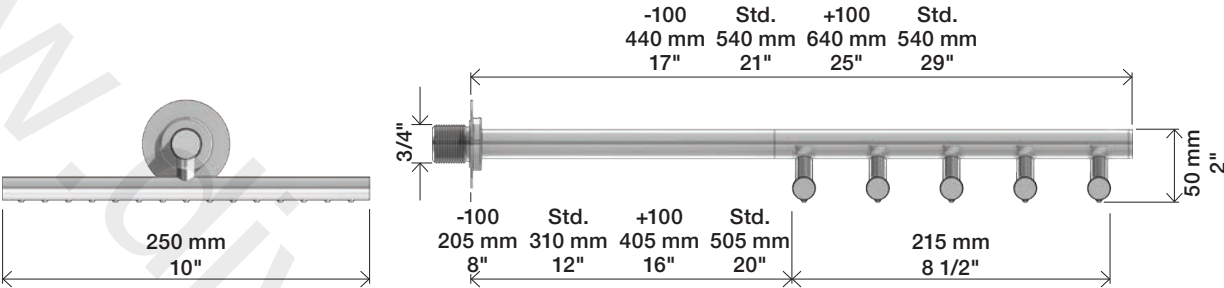

050A

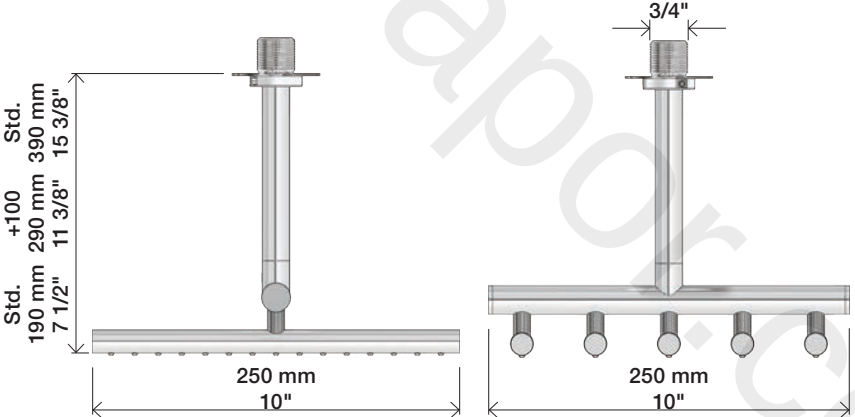


050K

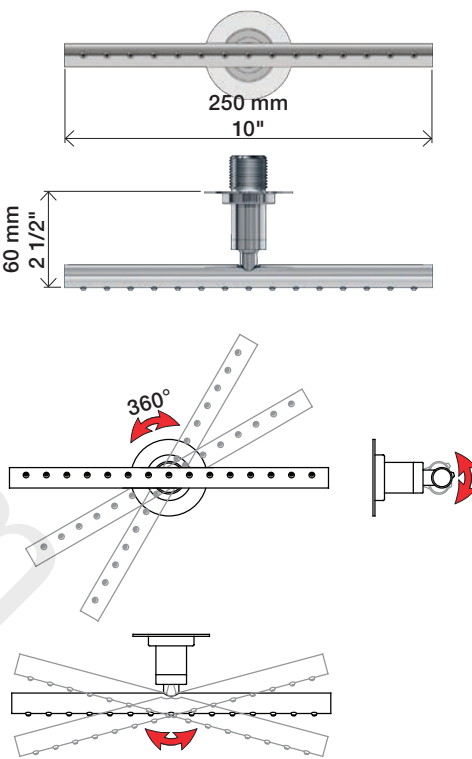


Service - VR556




050 + 050A

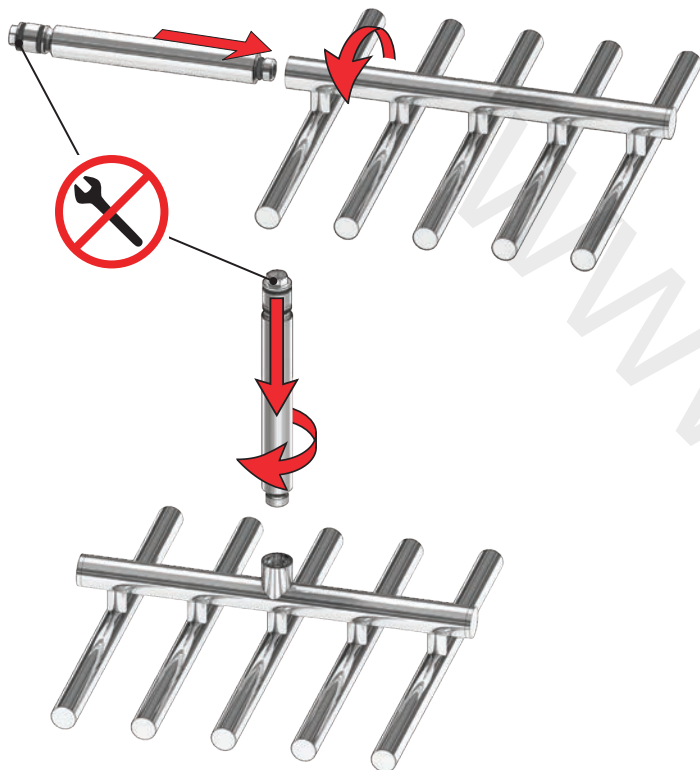

050

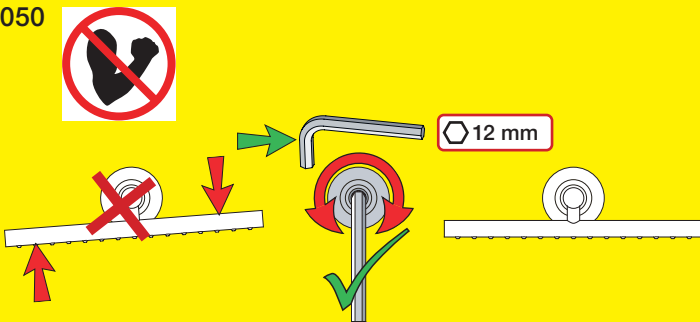

050A

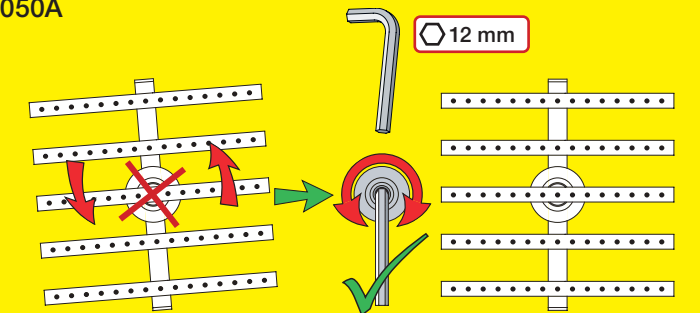

050 & 050A




050K



050A

Locking screw
Sicherungsschraube
Sikringsskrue
Fästskruv
Borgschroef
Vis de verrouillage

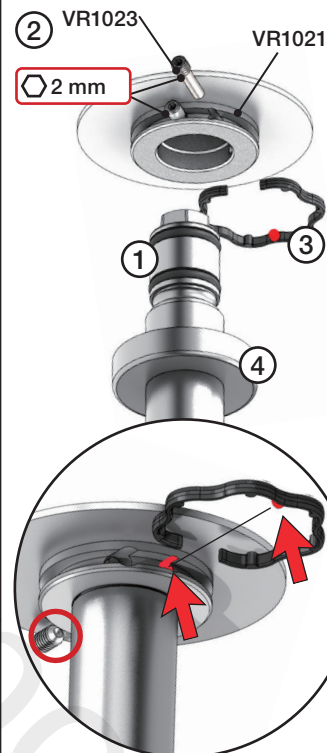



Extension
Verlängerung

Forlængerdele
Förlängning

Verlengstucken
Modification


T Min. 3 mm
Max. 65 mm

Y Min. 48 mm
Max. 110 mm

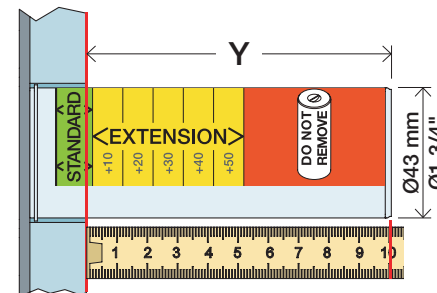

T	Y	VR2119 (VR1020): 050K VR2021 (VR1020): 050 VR2219 (VR1021): 050A
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+/VR2219+

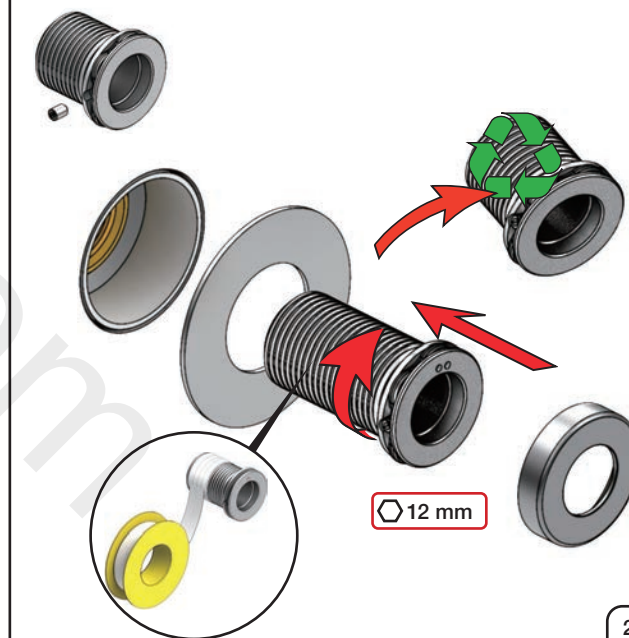

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage




T60:



T68:



T65:

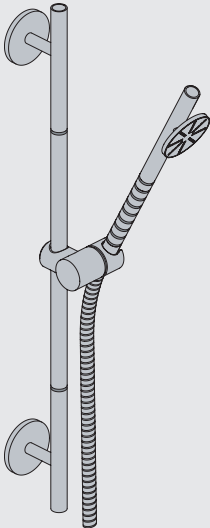

1

T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

Ø60 mm
Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1

Max. 65°C. 150°F

Service - VR556

2

T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

SILICONE

Ø6 mm
1/4"

25 mm
1"

001G

T8 → T68

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

490 mm
19 1/4"

590 mm
23 1/4"

690 mm
27 1/8"

790 mm
31"

800 mm
31 1/2"

900 mm
35 3/8"

600 mm
23 5/8"

700 mm
27 1/2"

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

40 mm
1 5/8"

Min. 200 mm
Min. 8"

070



Min. 350 mm
Min. 14"

T68





USA:
Max. flow rate:
1.6 Gal/min
6.0 l/min.

4

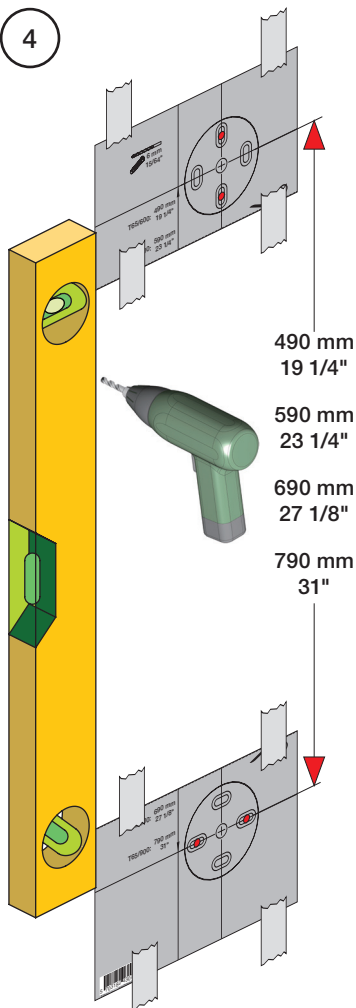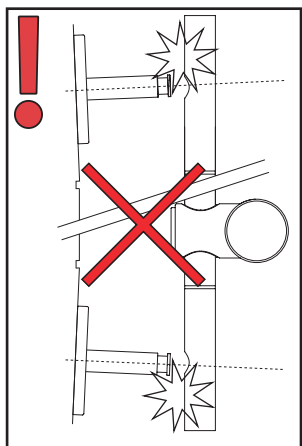490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"


5

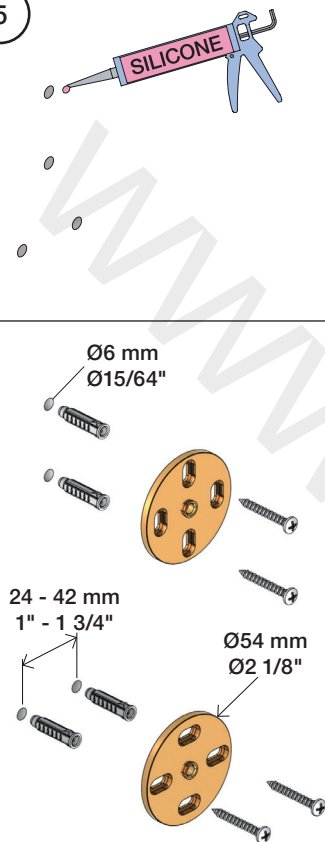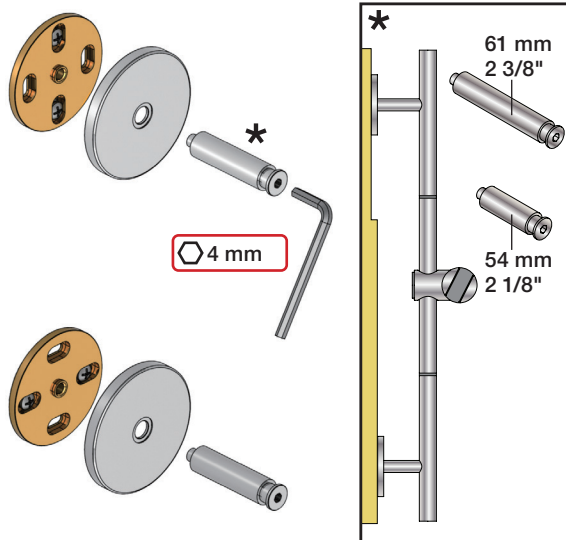Ø6 mm
Ø15/64"24 - 42 mm
1" - 1 3/4"Ø54 mm
Ø2 1/8"



4 mm

61 mm
2 3/8"54 mm
2 1/8"

6

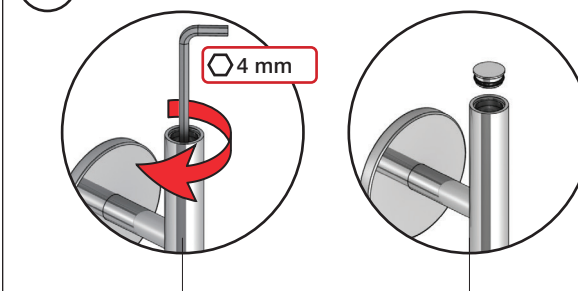


4 mm

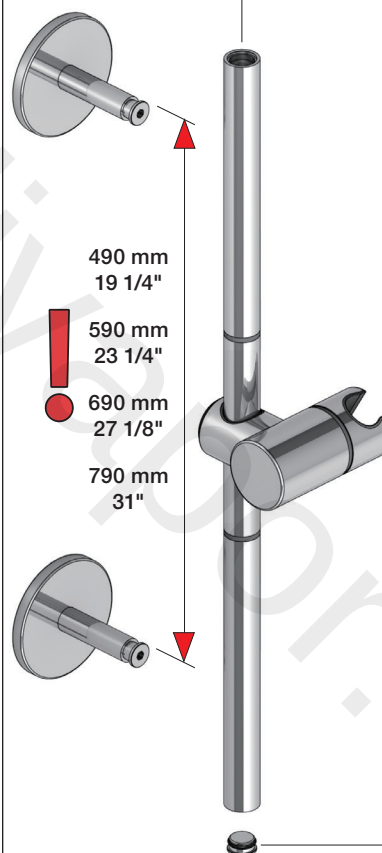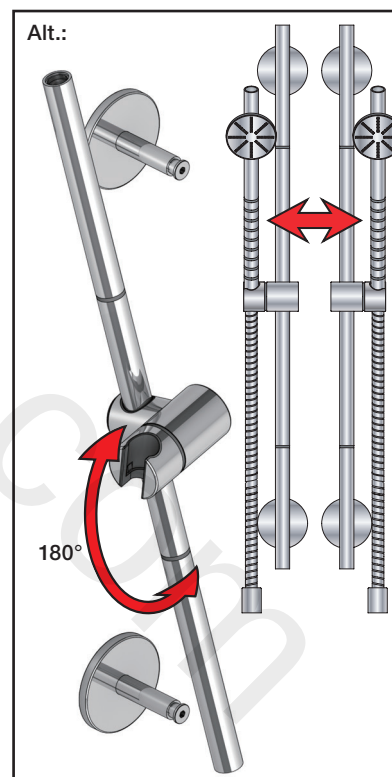490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"Alt.:
180°

7



8

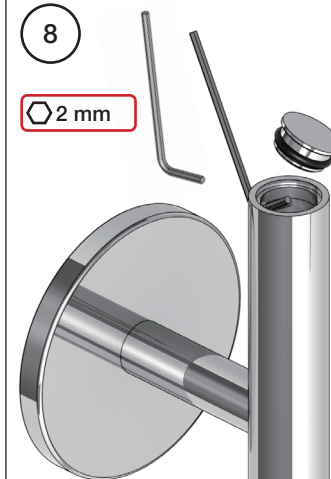


2 mm

VOLA 100, 100X, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Fitting instruction
Montageanleitung
Monteringsvejledning



Monteringsvægledning
Montage hanleiding
Manuel de montage

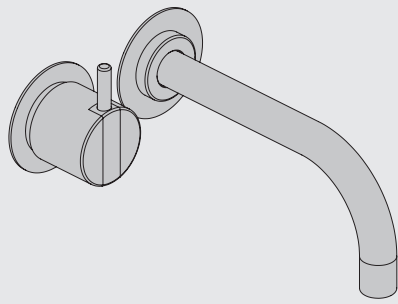

www.vola.com
100-2100_V3_40998502
17-08-2022

5 705230 286211

	L	L1	L2	H	H1	D
100, 100X, 200V, 300, 400V, 400DV, 2100, 2100X, 2200V, 2300, 2400V	377 mm 14 3/4"	260 mm 10"	268 mm 10 1/2"	95 mm 3 3/4"	186 mm 7 3/8"	70 mm 2 3/4"
400NV, 400TV, 2400NV, 2400TV	475 mm 18 3/4"	355 mm 14"	367 mm 14 1/2"			
400FV, 400RV, 2400FV, 2400RV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			

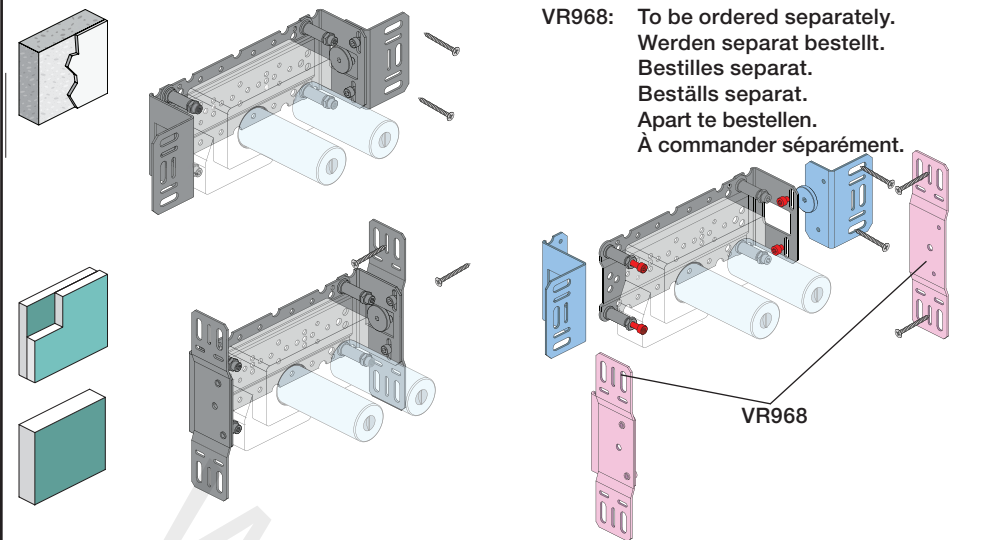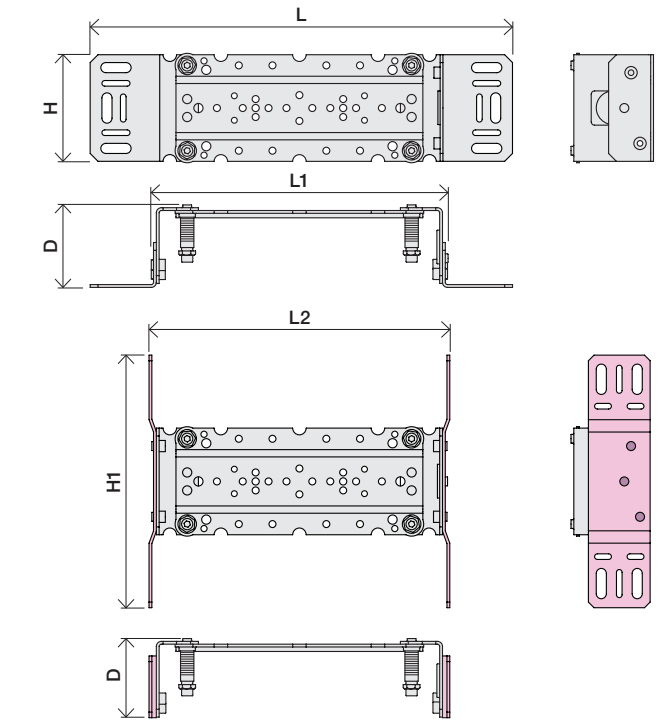

VR968: To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A	Data, 3 Bar/43.5 Psi:		Max. 65°C, 150°F
	l/min.	Gal/min.	
100:	18,3	4.8	
400V:	15,6	4.1	
2100:	25,2	6.7	
2400V:	22,2	5.9	

Max.: 10 Bar/145 psi

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

**!DO NOT!
!REMOVE!**

C DE: Bitte separat beiliegende Anleitung für die Schalldämpfer VR1249 beachten

DE: Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten

D

Box till inbygggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

200M

PEX1

Extension
Verlängerung
Forlængerdele
Förlängning
Aanpassing
Modification

VR1260

VR2260

STD +10 +20 +30 +40 +50

T Min. 3 mm
Max 65 mm

Y Min. 48 mm
Max. 110 mm

T	Y	VR1260/2260/1400/2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

Extension, retrofit
Verlängerung, nachträglicher Einbau
Forlængerdele, eftermontering
Förlängning, eftermontering
Aanpassing na montage
Modification après installation

X 52 - 0 mm

X -15 - 0 mm

	X	VR1260 + VR1400 + VR2019
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

	X	VR2260 + VR1400 + VR2019
	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

Fitting of extension
Montage von verlängerung
Montering af forlængerdele

Montering av förlängning
Montage van de verlengstukken
Montage des rallonges

VR1260+

VR2260+

VR2019+, VR2119+

VR269

VR2269

12 mm

18 mm

26 mm


VR1400+

400-2400

VR1410


28 mm

1

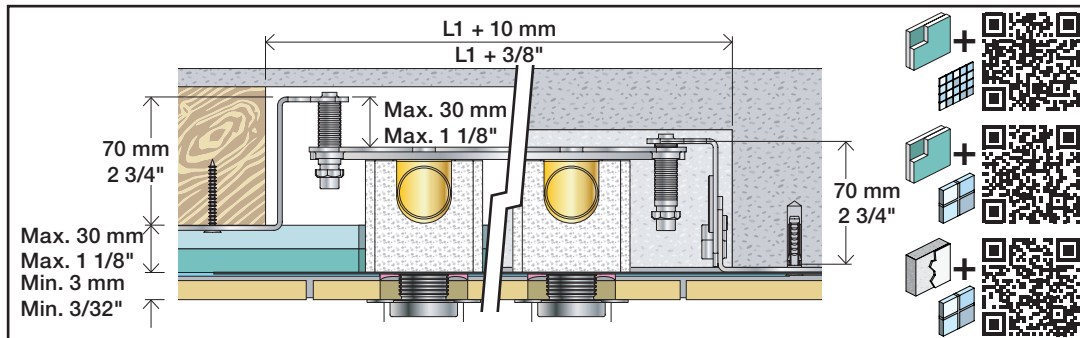

2x13 mm Lightweight wall
Leichtwand
Let væg




Lätta konstruktion
Holle wandconstructie
Construction légère

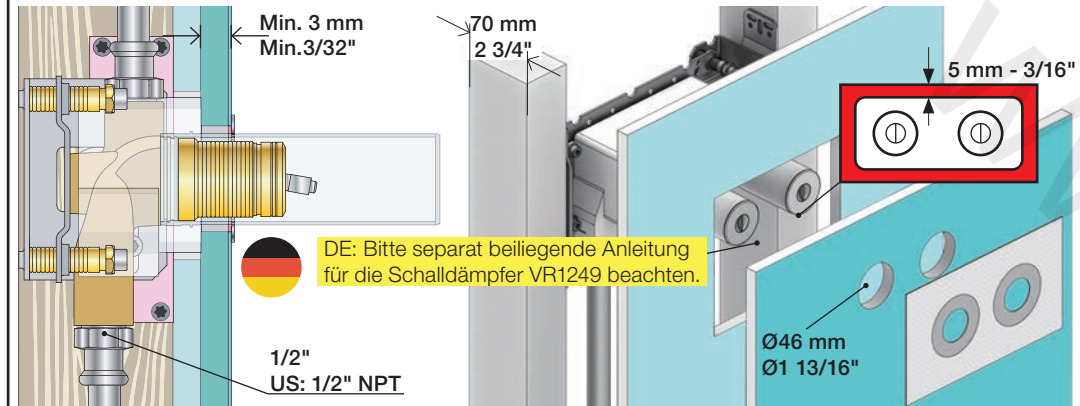

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère




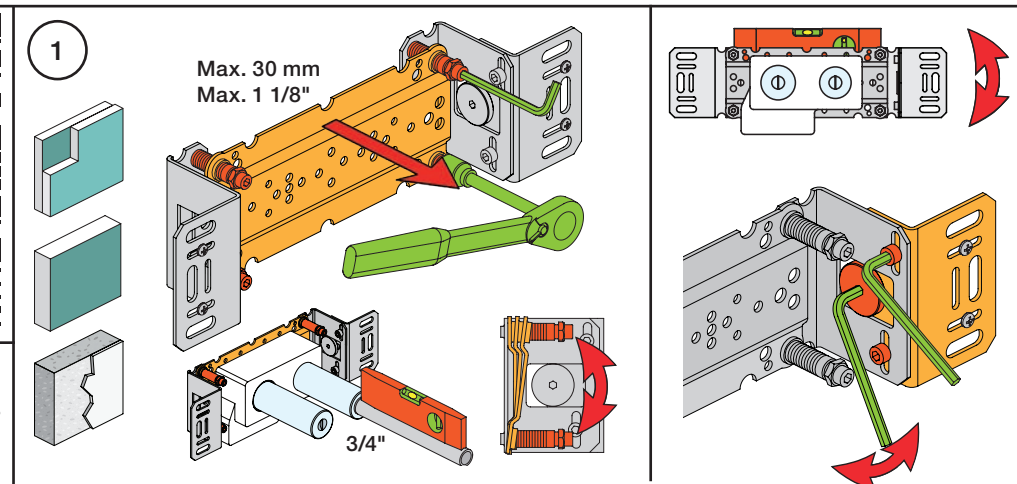
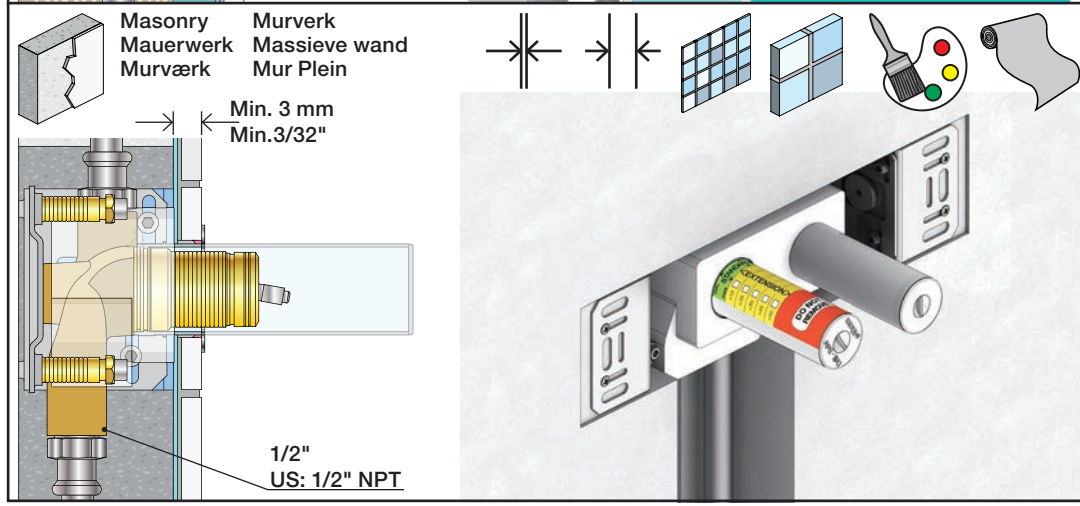
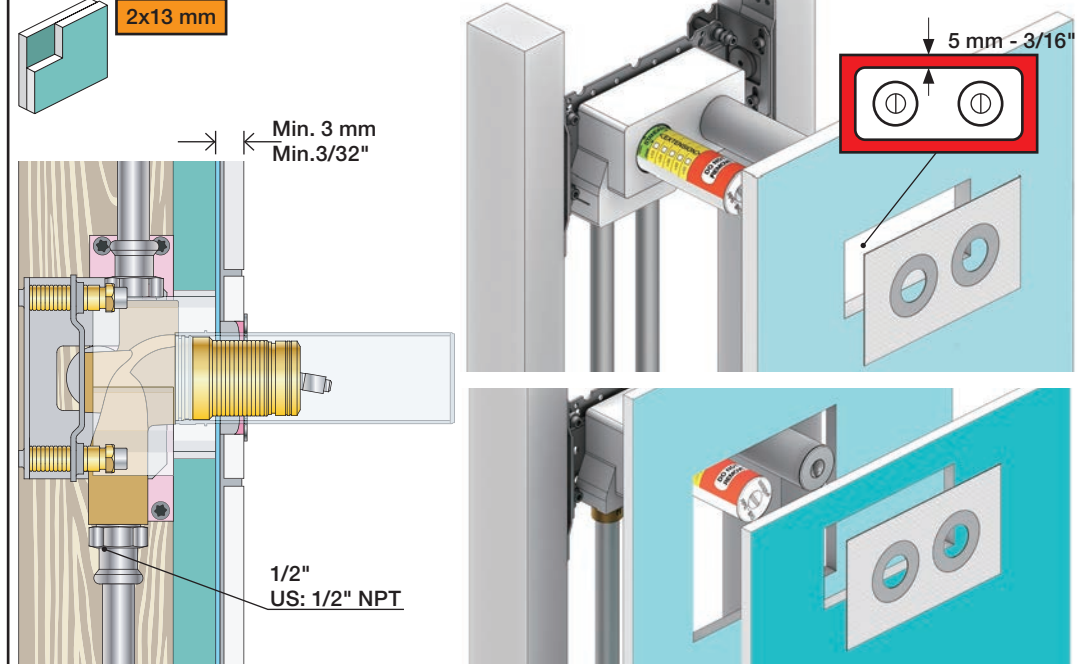


2


Test Pressure
Prüfdruck
testtryk
Test tryk
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau !
! MAX 1 Minute - Minut - Minuut !

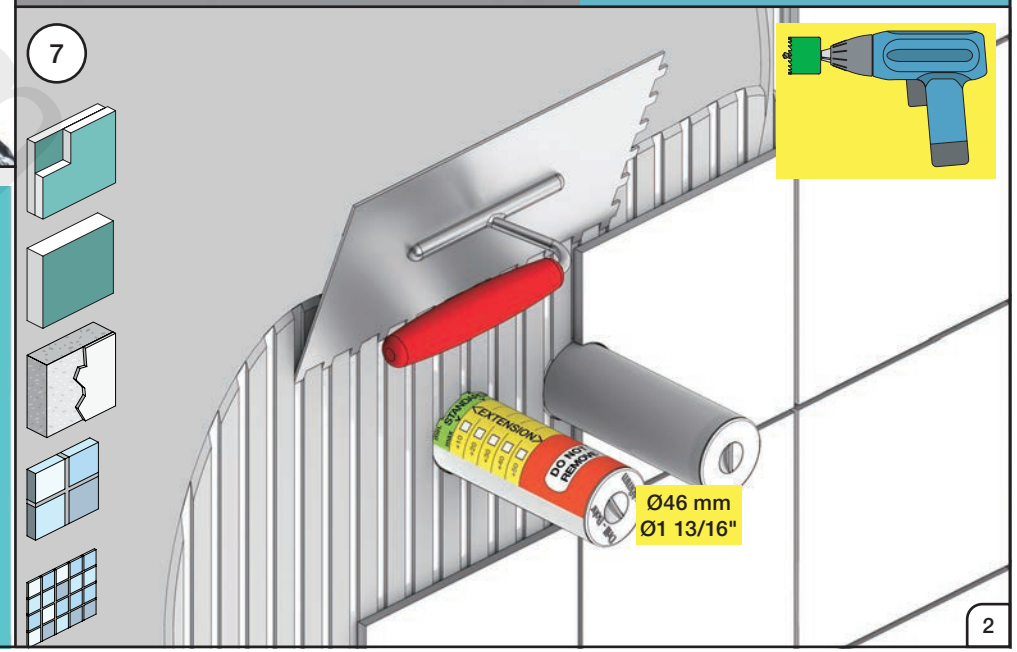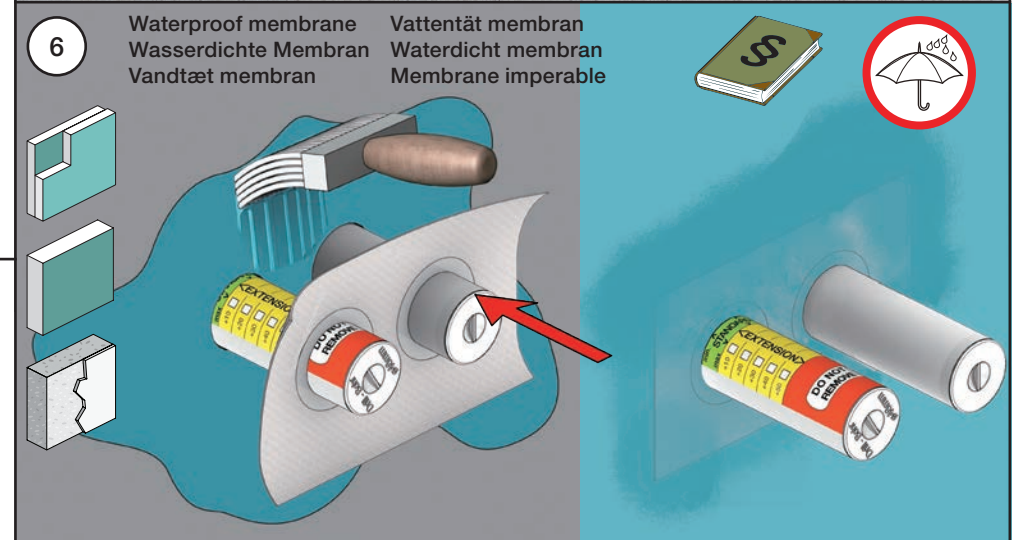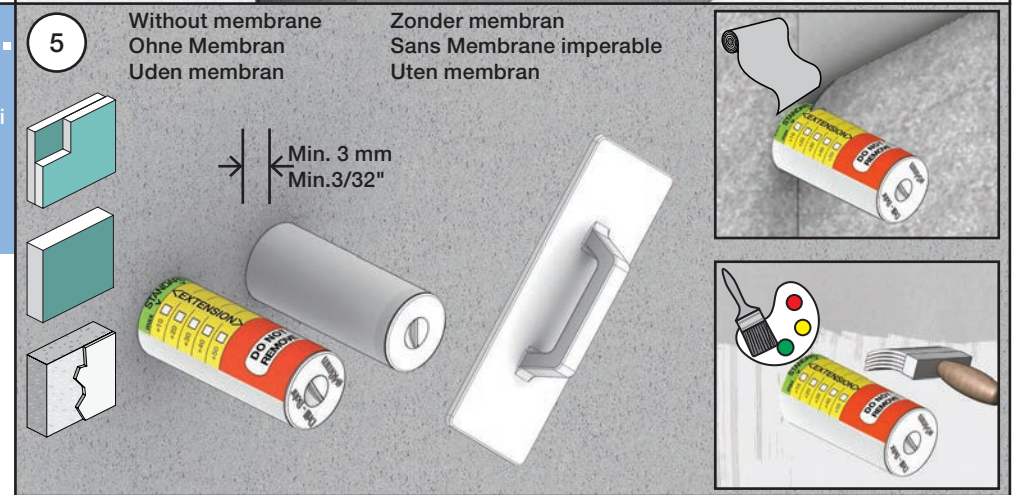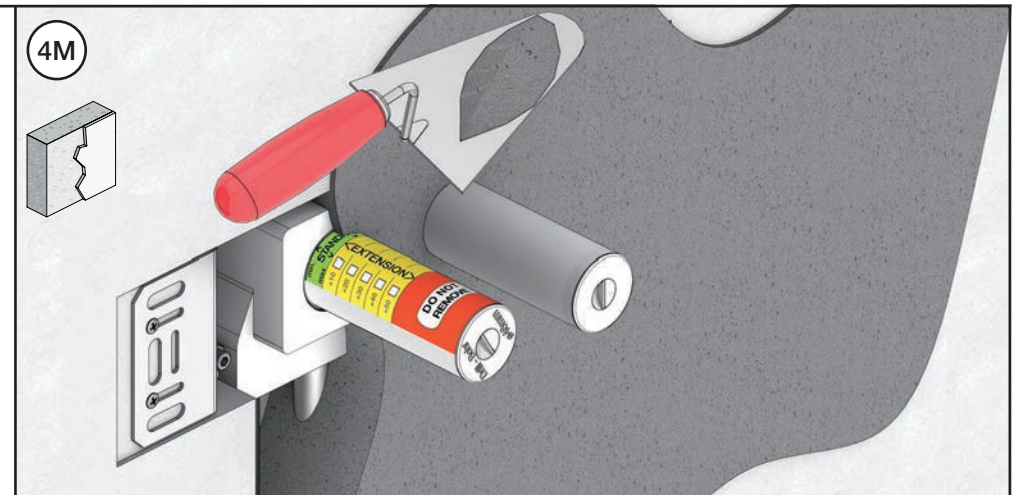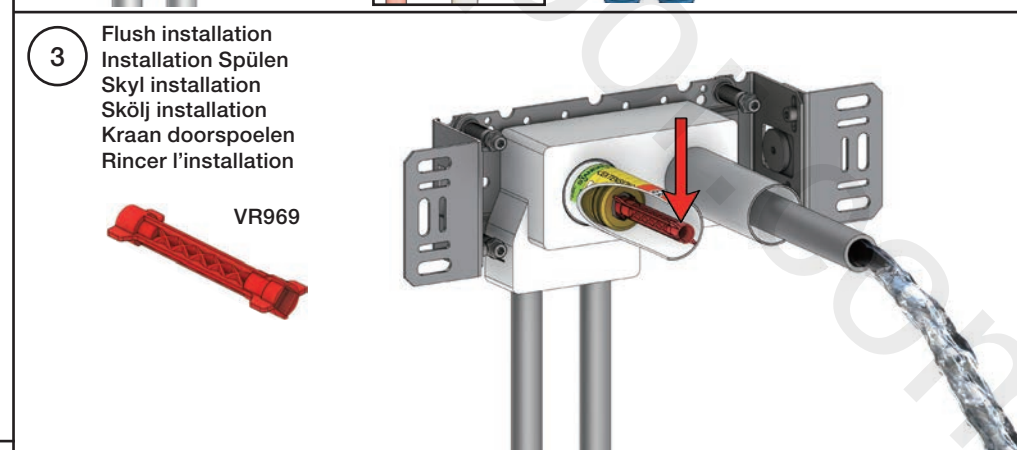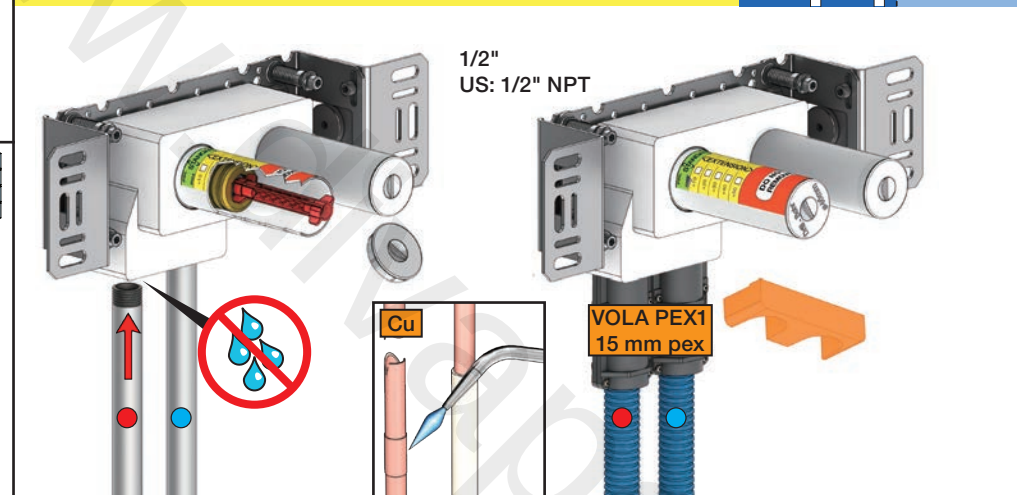

Do not cut the membrane
 Die Membran nicht schneiden
 Skær ikke membranen
 * Skär inte membranet
 Snij het membraan niet door
 Ne coupez pas la membrane
 No cortar la membrana



*Membran används inte i SVERIGE,
 ihop med inbyggingsboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning
 Verlängerung
 Forlængelse
 Anpassung
 Modification



VR2260/VR1400/VR2019


	3 - 15 mm	Std.
Tiles:	15 - 25 mm	+10
Fliesen:	25 - 35 mm	+20
Fliser:	35 - 45 mm	+30
Tegels:	45 - 55 mm	+40
Carreaux:	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	- 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Tiles: Fliesen: Fliser:	Tegels: Carreaux:	3 - 15 mm Std.
		15 - 25 mm +10
		25 - 35 mm +20
		35 - 45 mm +30
		45 - 55 mm +40
		55 - 65 mm +50



VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50


NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"

NR 24:
Ø43 mm
Ø1 3/4"

NR 28




NR 28 - 1

VR3279

VR3279B

NR 28 - 2

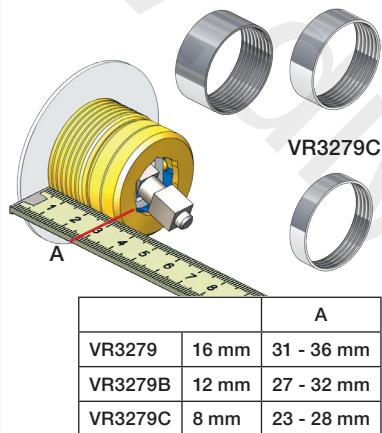


	A	
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 19 - 1 NR 24 - 1

VR2204


VR2204B

VR2204C

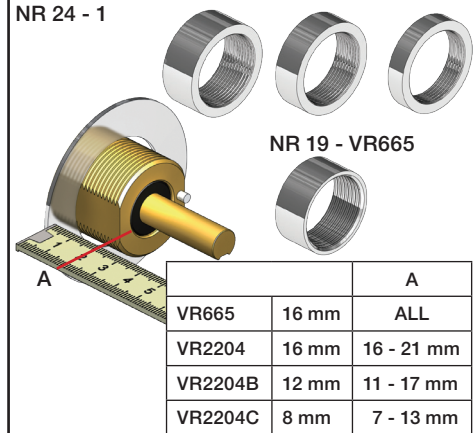


	A	
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm


NR 28 - 3

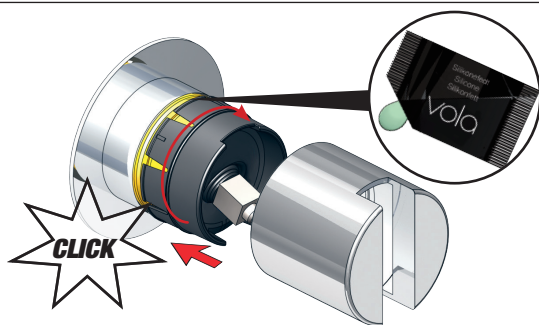


NR 28 - 4




NR 19 - 2 NR 24 - 2

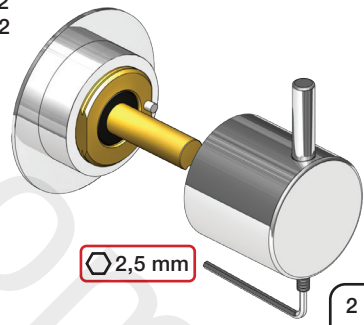

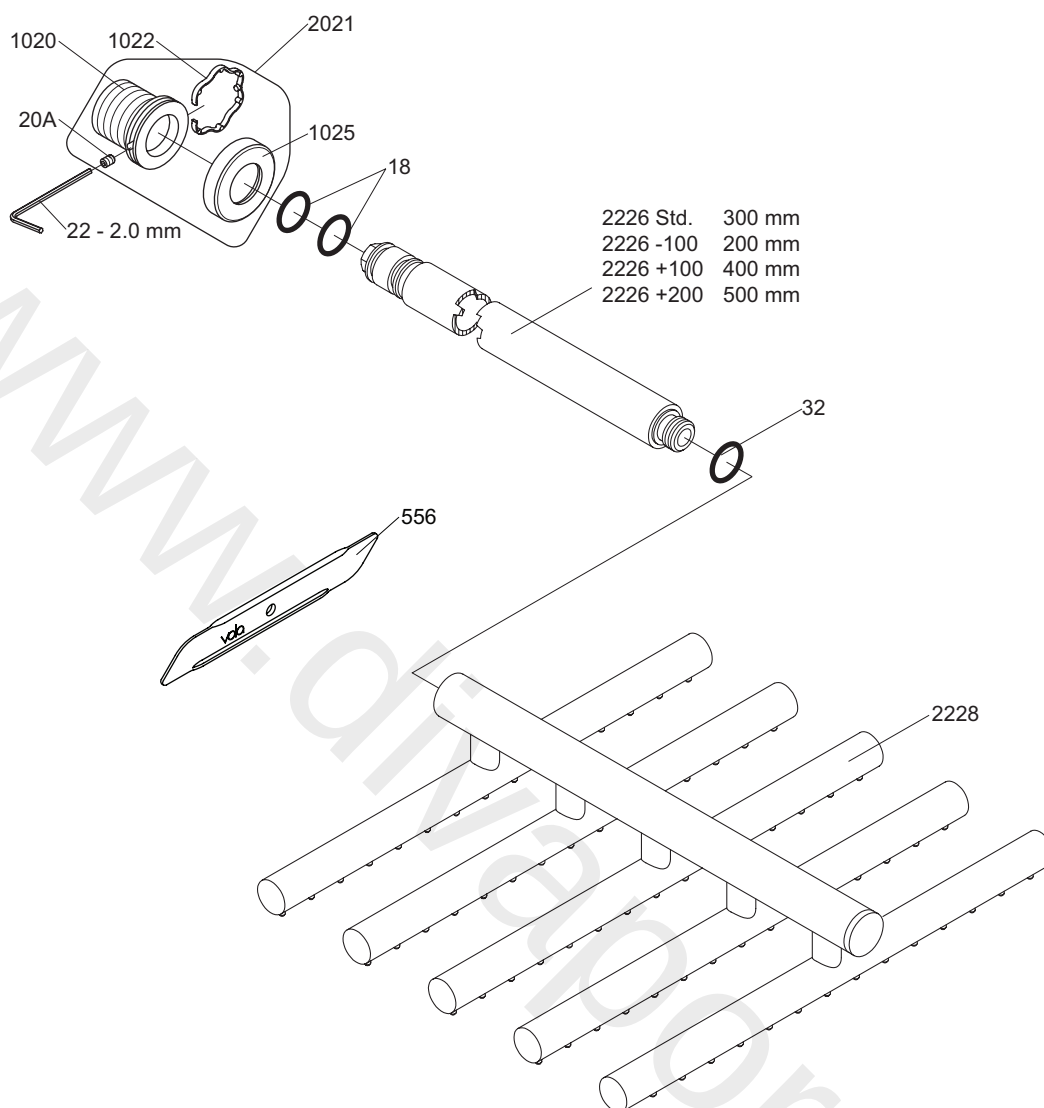

VR1020K: VR20A, VR22, VR1020, VR1022
 VR2021: VR20A, VR22, VR1020, VR1022, VR1025




vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 050


Date
 Apr. 21

Rev.
 3

Sheet
 SB 14.1

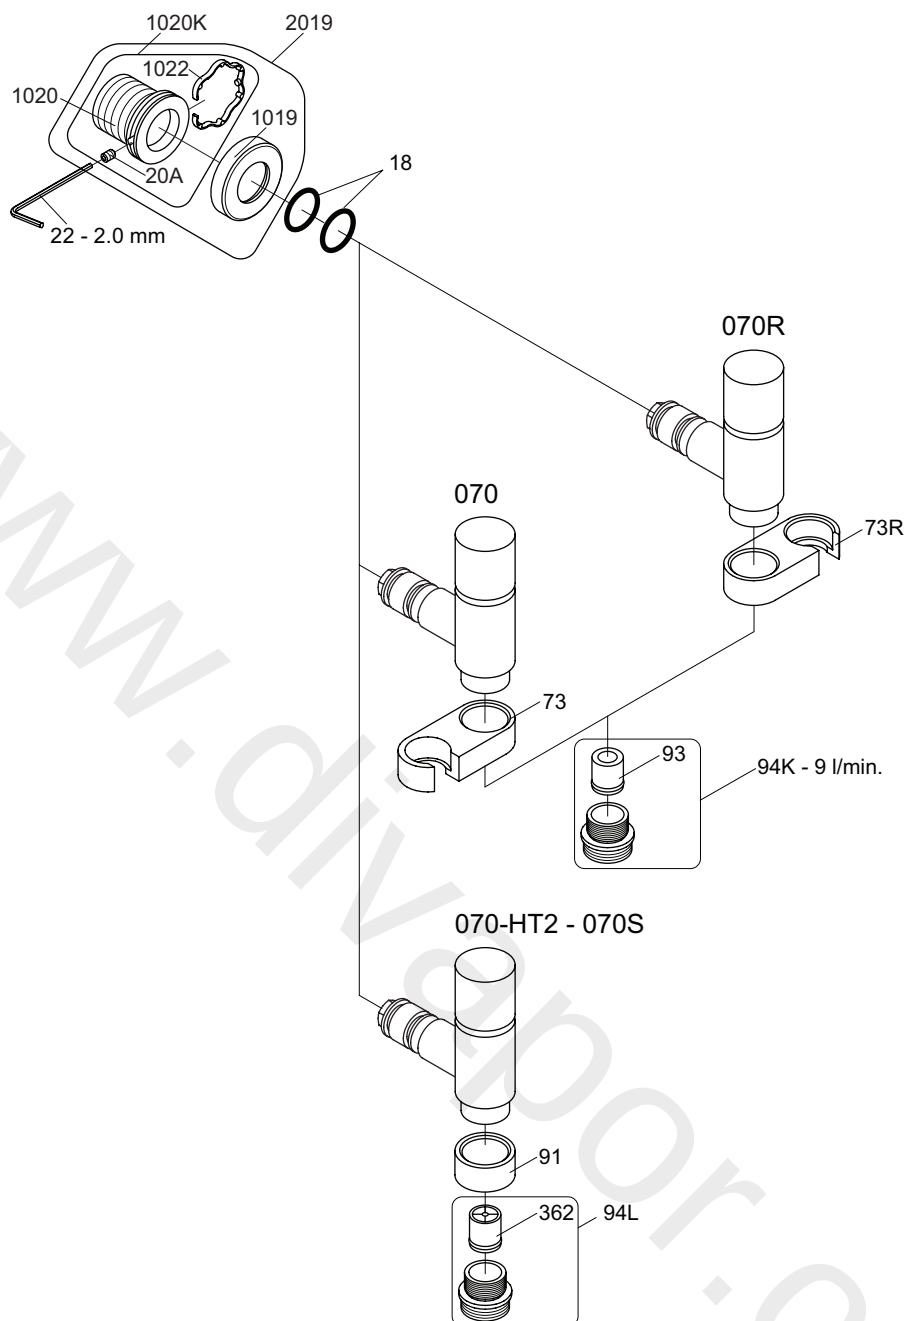

VR1020K: VR20A, VR22, VR1020, VR1022
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



volal
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@volal.com
 www.volal.com

VOLA 070, 070R 070-HT2

Date
 Apr. 21

Rev.
 5





Sheet
 SB 16

2400V


Diagram illustrating the exploded view of a 2400V electrical component assembly, showing various parts and their assembly sequence:

- Top Assembly:** Includes parts 406, 2213+, 1400+, 403, 21, and 2205+.
- Mounting Bracket:** Labeled 1400, featuring a terminal block 406 and a screw 2213.
- Internal Components:** Includes 2204C, 2204B, 2204, 2424, and 2205.
- Terminal Block:** Labeled 2205, with a screw 2213 and a terminal 403.
- Assembly 1:** Includes 2251, 1277, 2260, 2269, 969, 2279, 1275, 22, 20D, 2273, 2278, 2279B, 2279C, and NR21.
- Assembly 2:** Includes 2260+, 1902, 972, and 1249.
- Assembly 3:** Includes 1410, 1411, and NR21L: 2273L.
- Assembly 4:** Includes 968, 2A, and 23.
- Assembly 5:** Includes 968, 2A, and 23.
- Assembly 6:** Includes 968, 2A, and 23.
- Assembly 7:** Includes 968, 2A, and 23.
- Assembly 8:** Includes 968, 2A, and 23.
- Assembly 9:** Includes 968, 2A, and 23.
- Assembly 10:** Includes 968, 2A, and 23.
- Assembly 11:** Includes 968, 2A, and 23.
- Assembly 12:** Includes 968, 2A, and 23.
- Assembly 13:** Includes 968, 2A, and 23.
- Assembly 14:** Includes 968, 2A, and 23.
- Assembly 15:** Includes 968, 2A, and 23.
- Assembly 16:** Includes 968, 2A, and 23.
- Assembly 17:** Includes 968, 2A, and 23.
- Assembly 18:** Includes 968, 2A, and 23.
- Assembly 19:** Includes 968, 2A, and 23.
- Assembly 20:** Includes 968, 2A, and 23.
- Assembly 21:** Includes 968, 2A, and 23.
- Assembly 22:** Includes 968, 2A, and 23.
- Assembly 23:** Includes 968, 2A, and 23.
- Assembly 24:** Includes 968, 2A, and 23.
- Assembly 25:** Includes 968, 2A, and 23.
- Assembly 26:** Includes 968, 2A, and 23.
- Assembly 27:** Includes 968, 2A, and 23.
- Assembly 28:** Includes 968, 2A, and 23.
- Assembly 29:** Includes 968, 2A, and 23.
- Assembly 30:** Includes 968, 2A, and 23.
- Assembly 31:** Includes 968, 2A, and 23.
- Assembly 32:** Includes 968, 2A, and 23.
- Assembly 33:** Includes 968, 2A, and 23.
- Assembly 34:** Includes 968, 2A, and 23.
- Assembly 35:** Includes 968, 2A, and 23.
- Assembly 36:** Includes 968, 2A, and 23.
- Assembly 37:** Includes 968, 2A, and 23.
- Assembly 38:** Includes 968, 2A, and 23.
- Assembly 39:** Includes 968, 2A, and 23.
- Assembly 40:** Includes 968, 2A, and 23.
- Assembly 41:** Includes 968, 2A, and 23.
- Assembly 42:** Includes 968, 2A, and 23.
- Assembly 43:** Includes 968, 2A, and 23.
- Assembly 44:** Includes 968, 2A, and 23.
- Assembly 45:** Includes 968, 2A, and 23.
- Assembly 46:** Includes 968, 2A, and 23.
- Assembly 47:** Includes 968, 2A, and 23.
- Assembly 48:** Includes 968, 2A, and 23.
- Assembly 49:** Includes 968, 2A, and 23.
- Assembly 50:** Includes 968, 2A, and 23.
- Assembly 51:** Includes 968, 2A, and 23.
- Assembly 52:** Includes 968, 2A, and 23.
- Assembly 53:** Includes 968, 2A, and 23.
- Assembly 54:** Includes 968, 2A, and 23.
- Assembly 55:** Includes 968, 2A, and 23.
- Assembly 56:** Includes 968, 2A, and 23.
- Assembly 57:** Includes 968, 2A, and 23.
- Assembly 58:** Includes 968, 2A, and 23.
- Assembly 59:** Includes 968, 2A, and 23.
- Assembly 60:** Includes 968, 2A, and 23.
- Assembly 61:** Includes 968, 2A, and 23.
- Assembly 62:** Includes 968, 2A, and 23.
- Assembly 63:** Includes 968, 2A, and 23.
- Assembly 64:** Includes 968, 2A, and 23.
- Assembly 65:** Includes 968, 2A, and 23.
- Assembly 66:** Includes 968, 2A, and 23.
- Assembly 67:** Includes 968, 2A, and 23.
- Assembly 68:** Includes 968, 2A, and 23.
- Assembly 69:** Includes 968, 2A, and 23.
- Assembly 70:** Includes 968, 2A, and 23.
- Assembly 71:** Includes 968, 2A, and 23.
- Assembly 72:** Includes 968, 2A, and 23.
- Assembly 73:** Includes 968, 2A, and 23.
- Assembly 74:** Includes 968, 2A, and 23.
- Assembly 75:** Includes 968, 2A, and 23.
- Assembly 76:** Includes 968, 2A, and 23.
- Assembly 77:** Includes 968, 2A, and 23.
- Assembly 78:** Includes 968, 2A, and 23.
- Assembly 79:** Includes 968, 2A, and 23.
- Assembly 80:** Includes 968, 2A, and 23.
- Assembly 81:** Includes 968, 2A, and 23.
- Assembly 82:** Includes 968, 2A, and 23.
- Assembly 83:** Includes 968, 2A, and 23.
- Assembly 84:** Includes 968, 2A, and 23.
- Assembly 85:** Includes 968, 2A, and 23.
- Assembly 86:** Includes 968, 2A, and 23.
- Assembly 87:** Includes 968, 2A, and 23.
- Assembly 88:** Includes 968, 2A, and 23.
- Assembly 89:** Includes 968, 2A, and 23.
- Assembly 90:** Includes 968, 2A, and 23.
- Assembly 91:** Includes 968, 2A, and 23.
- Assembly 92:** Includes 968, 2A, and 23.
- Assembly 93:** Includes 968, 2A, and 23.
- Assembly 94:** Includes 968, 2A, and 23.
- Assembly 95:** Includes 968, 2A, and 23.
- Assembly 96:** Includes 968, 2A, and 23.
- Assembly 97:** Includes 968, 2A, and 23.
- Assembly 98:** Includes 968, 2A, and 23.
- Assembly 99:** Includes 968, 2A, and 23.
- Assembly 100:** Includes 968, 2A, and 23.


NR21:	VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
NR24*:	VR2A, VR22, VR1419, VR2204, VR2204B, VR2204C - (Brass, Messing, Laiton)
NR24**:	VR2A, VR22, VR1419, VR2204 - (Stainless steel, Edelstahl, Rustfrit stål, Acier inoxydable)
VR1277K:	VR22, VR2269, VR1277
VR1400:	VR21, VR23, VR406, VR1902, VR2213

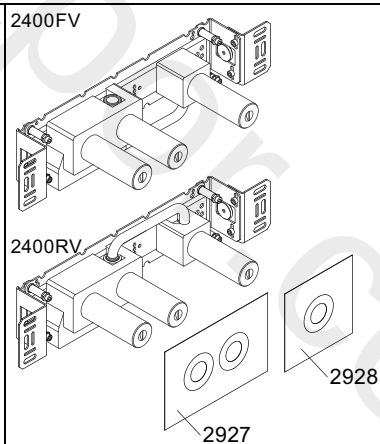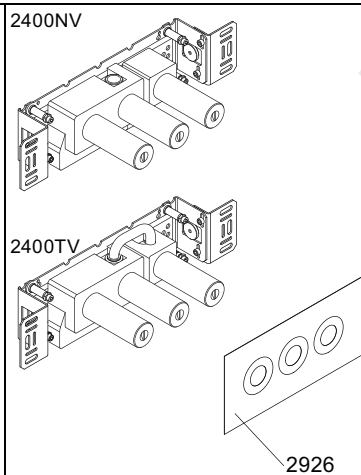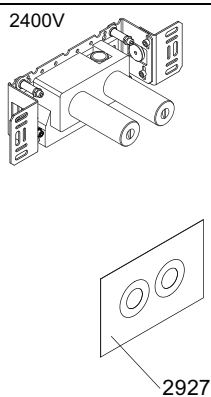


1040



2003K



2004



2003



2001, 001G



2001, 001G, 001



2001, 001G, 001



voia®

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 2400

2400V/FV/NV/RV/TV

Date
May. 22

Rev. 5

Sheet
SB 10.10