




 **GODKENDT
TIL DRIKKEVAND**



vola®

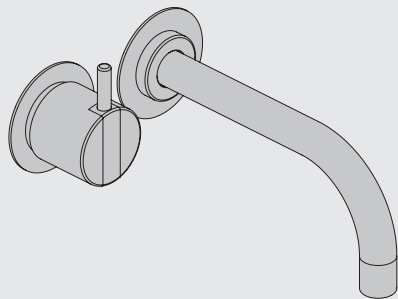


5 705230 286211

©



PEX1

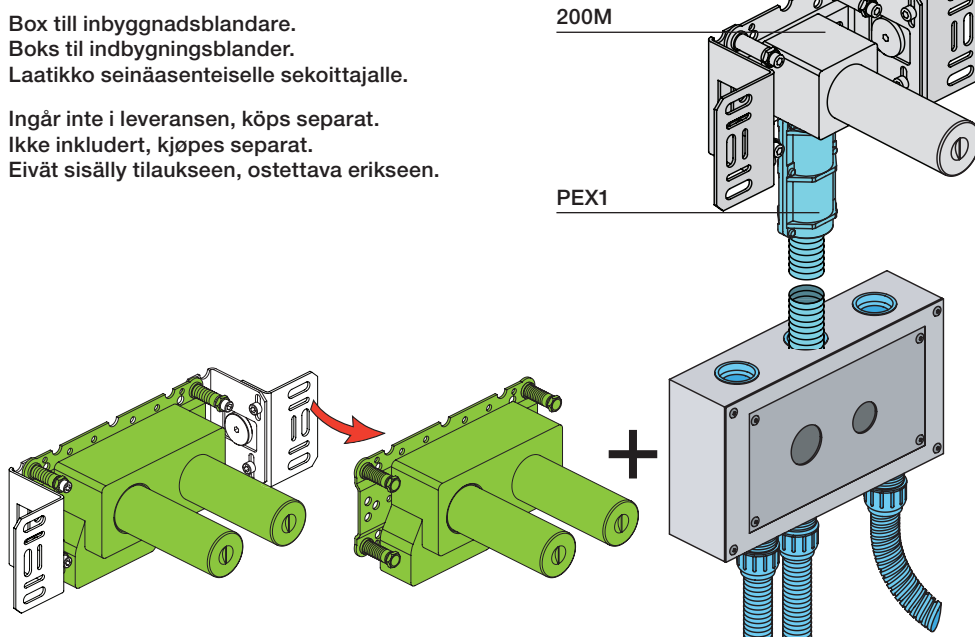

VR968

A

l/min.	Gal/min.
18,3	4.8
15,6	4.1
25,2	6.7
22,2	5.9

Max. 65°C, 150°F


Max. 65°C, 150°F

Max.: 10 Bar/145 psi

B



**!DO NOT!
!REMOVE!**



VR12

VR22


A diagram of a standard extension cable. The cable has a blue outer jacket. Inside, there is a yellow section labeled 'EXTENSION' with markings for +10, +20, +30, +40, and +50. To the right of the yellow section is a red section with a white label that says 'DO NOT REMOVE'. A ruler at the bottom shows the cable's length, with a red vertical line indicating the end of the cable at the 10-foot mark. A dimension line above the cable is labeled 'Y'.

	X	VR1260 + VR1400 + VR2019
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

Montering av förlängning
Montage van de verlengstukken
Montage des rallonges


VR2260+

VR2019+, VR2119+

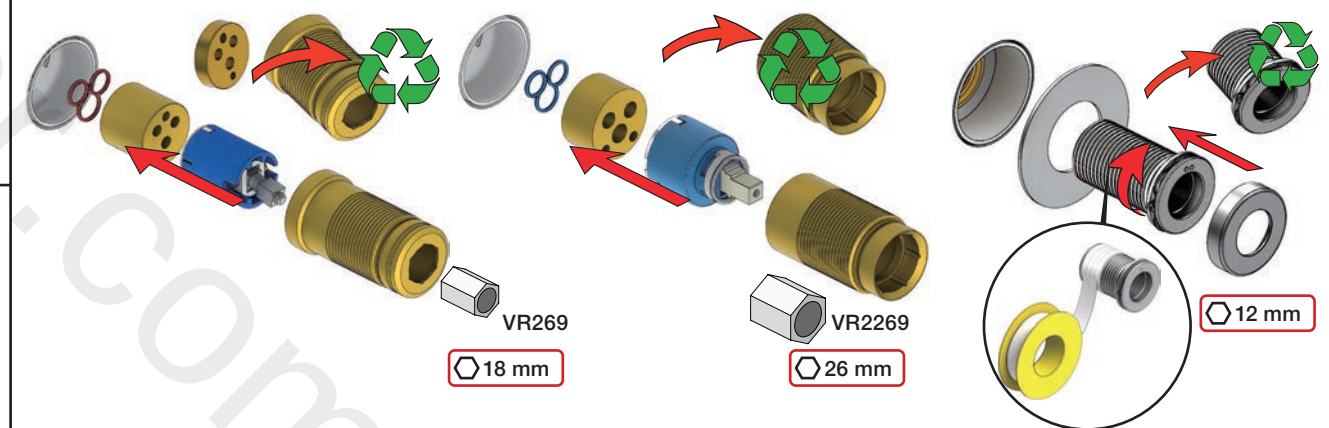


400-2400



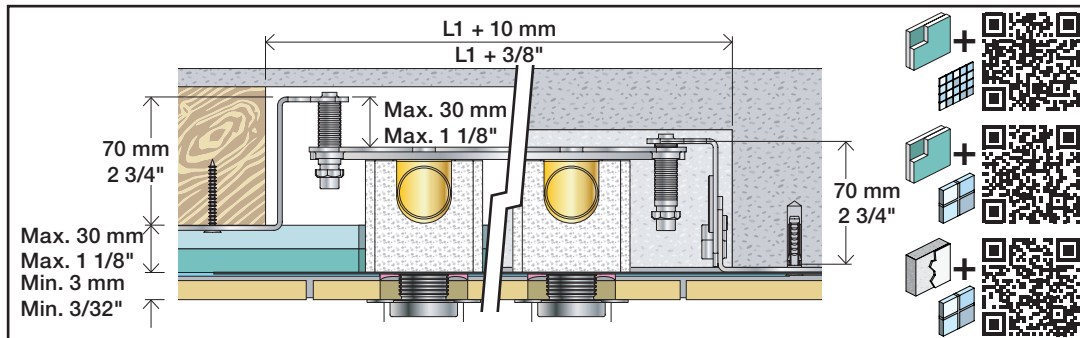

2x13 mm Lightweight wall
Leichtwand
Let væg




Lätta konstruktion
Holle wandconstructie
Construction légère

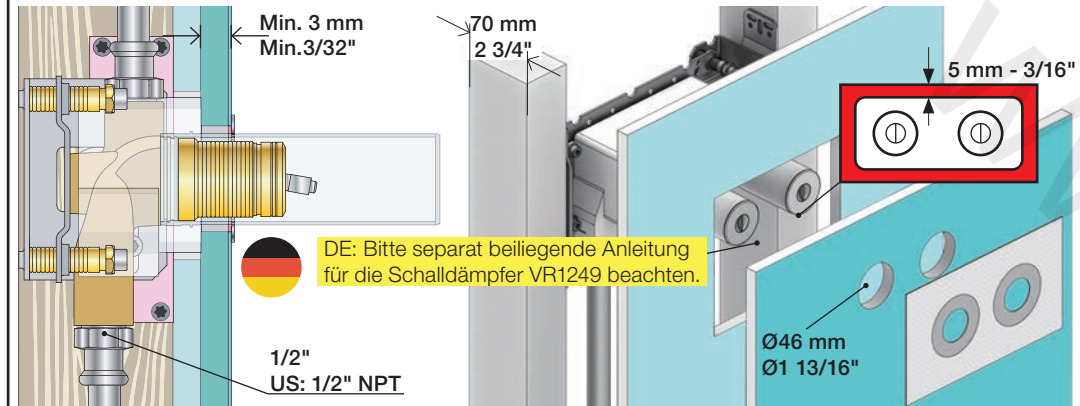

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère





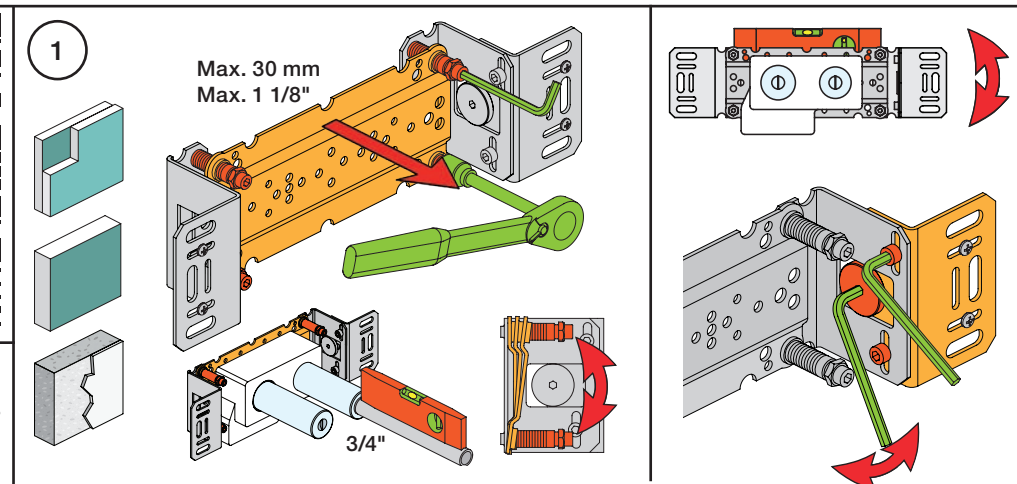
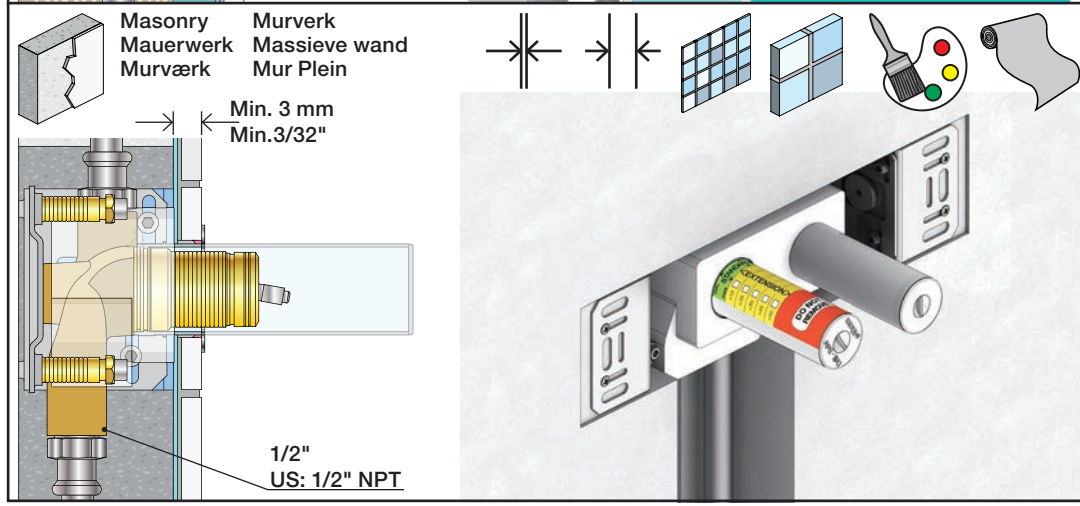
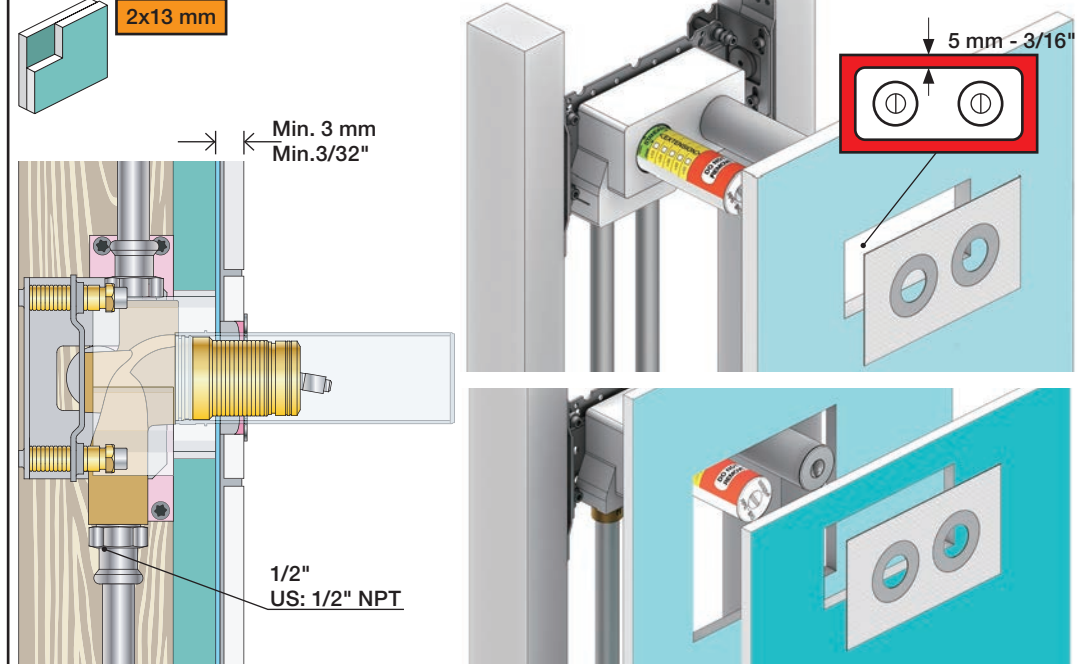


2

Test Pressure
Prüfdruck
testtryk
Test tryk
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.


! Water - Wasser - Vand - Vatten - Water - L'eau !
! MAX 1 Minute - Minut - Minuut !

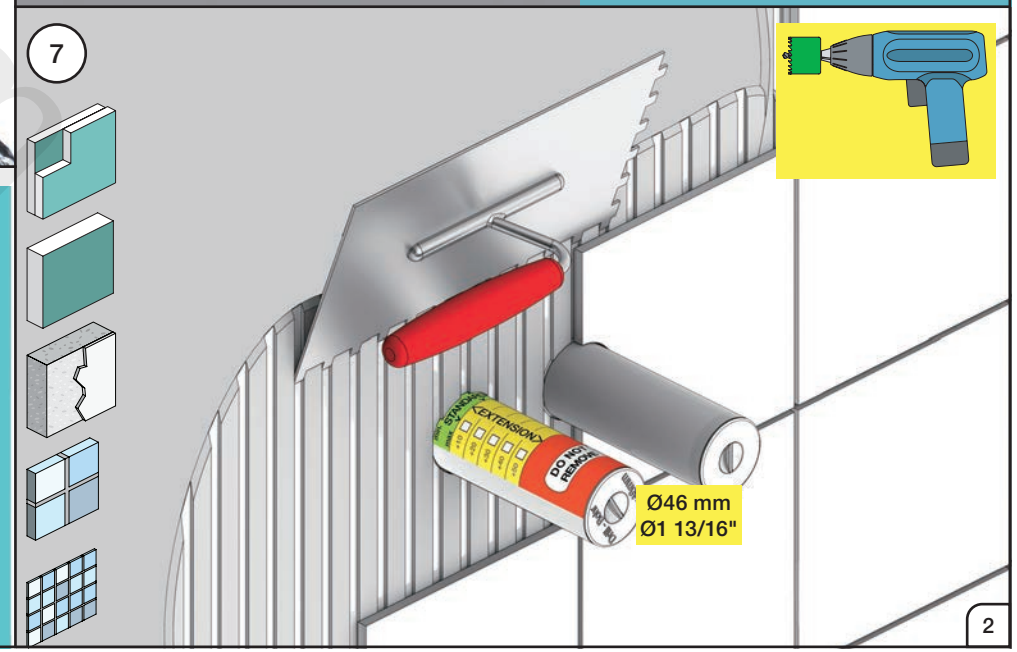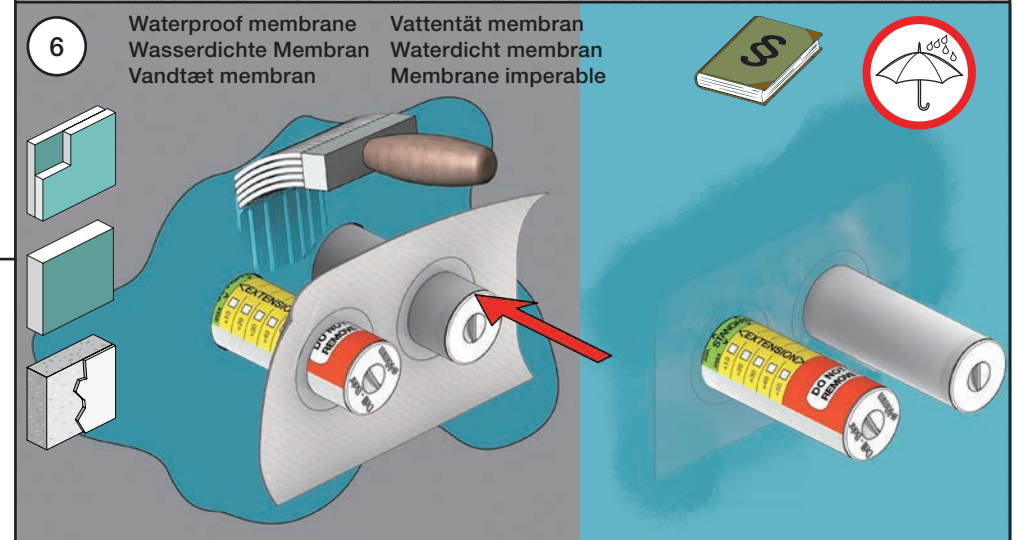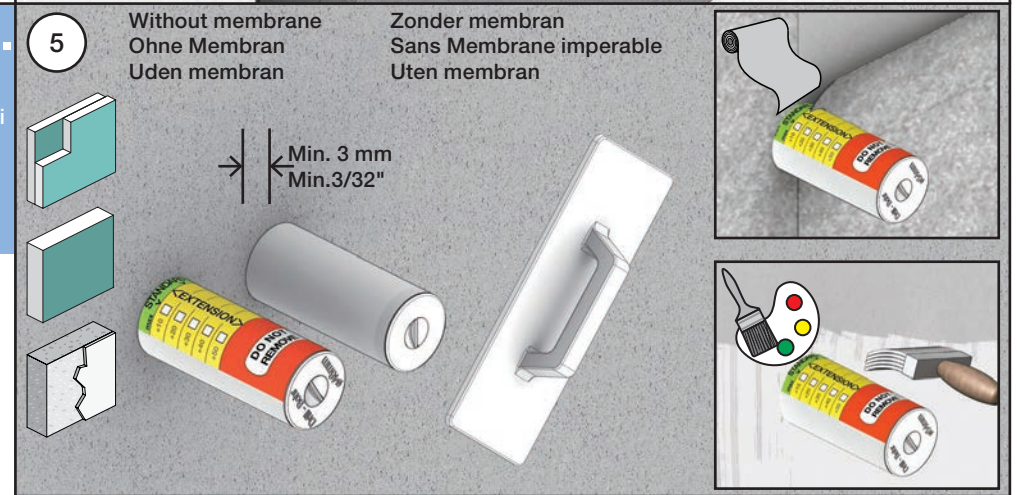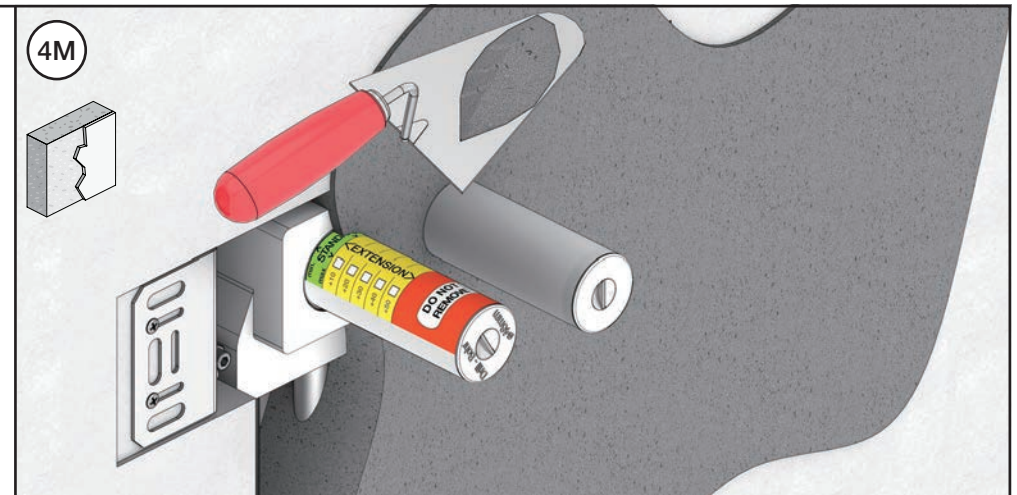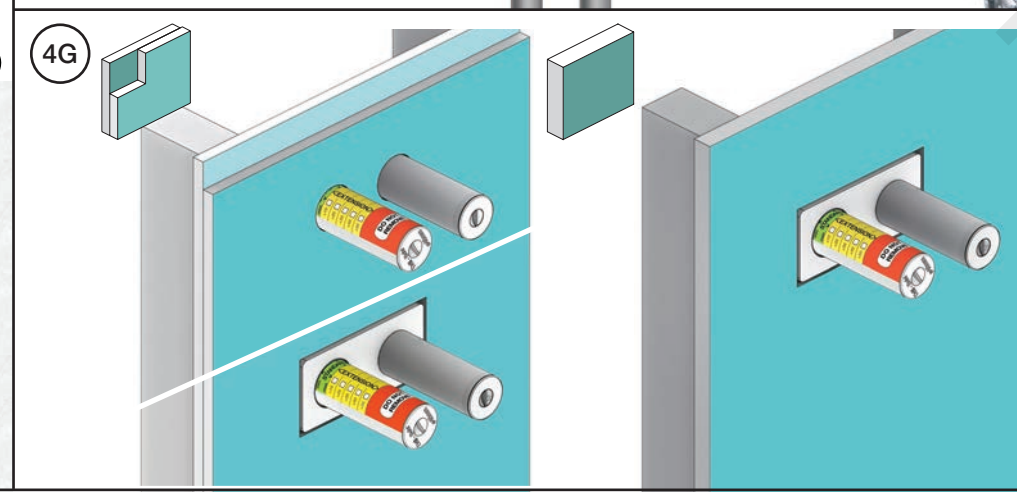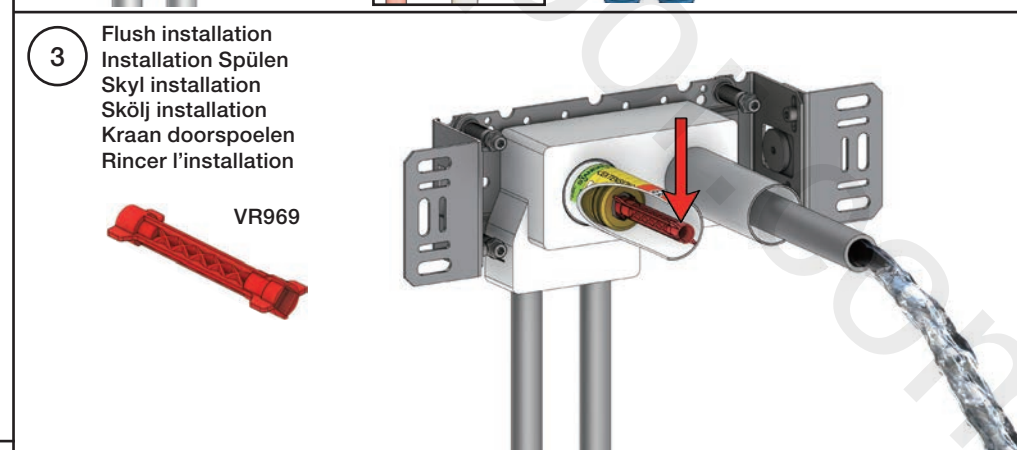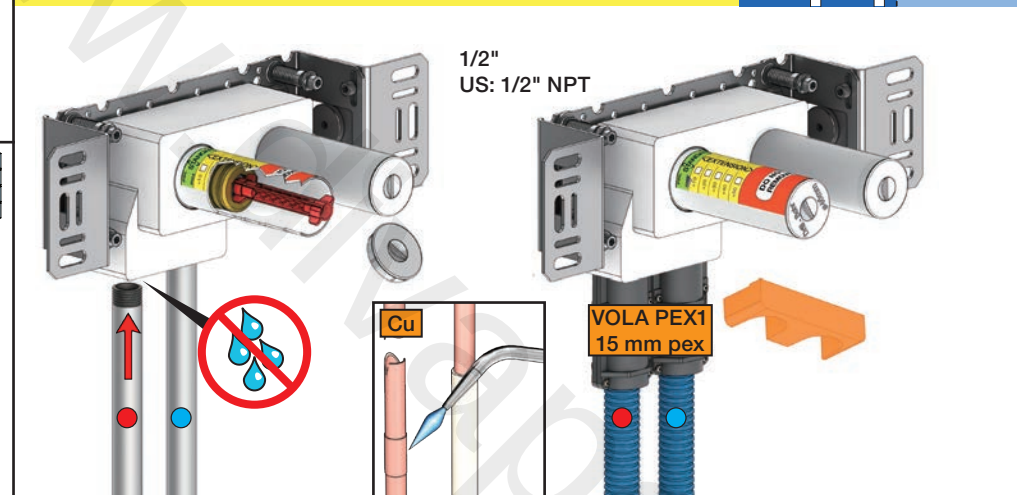

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montagehanleiding
Manuel de montage


060:

1 - 6 + 11

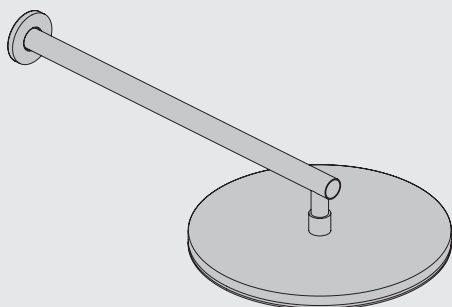

060A:

7 - 11



Data	Bar:	1	2	3	4	5
	(l/min)	12	18	22	25	29
	(Gal/min)	3.4	4.8	5.8	6.6	7.7
Max. 65°C. 150°F						

VR161 - 060, 060A:

VR161K: 1.8 Gal/min - 7 l/min
VR161D: 2.5 Gal/min - 9 l/min
VR161F: 3.7 Gal/min - 14 l/min

VR161K VR161D VR161F

3 + 10

VR648

060

200: 393 mm 15 1/2" -100: 493 mm 19 1/2" Std.: 593 mm 23 3/8"

200: 250 mm 9 7/8" -100: 350 mm 13 3/4" Std.: 450 mm 17 3/4"

80 mm 3 1/8"

Ø70 mm Ø2 3/4"

Ø286 mm Ø11 1/4"

1

Ø50 mm Ø2"

24 mm

2

3

VR161F: 14 l/min 3.7 Gal/min

4

4 - 8 mm 1/8" - 3/8"

2,5 mm

5




6 + 11

2,5 mm




1 + 2

3 + 4

1

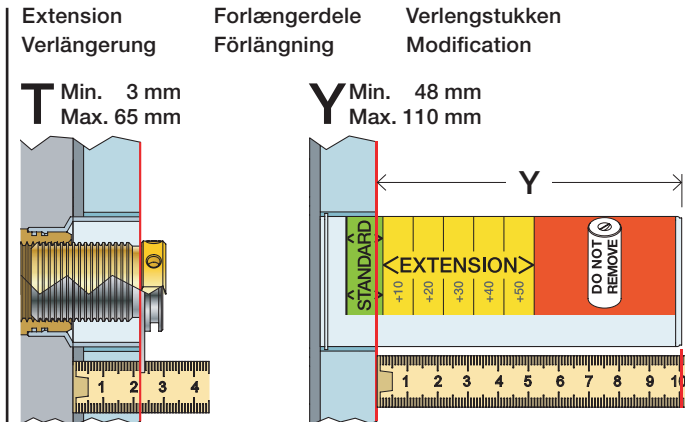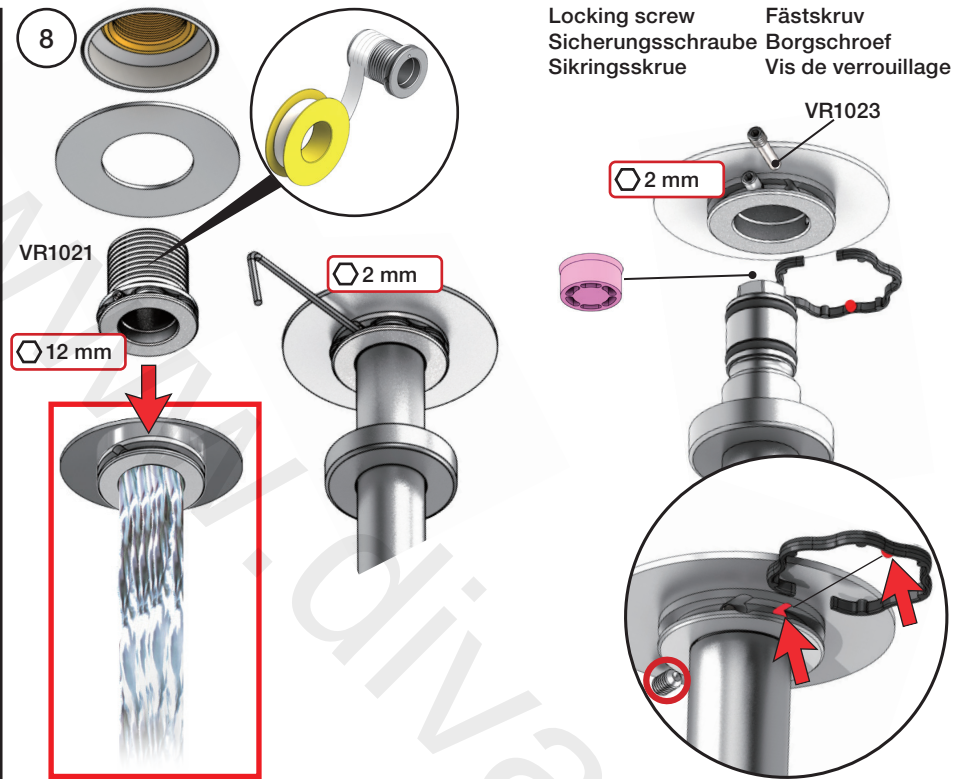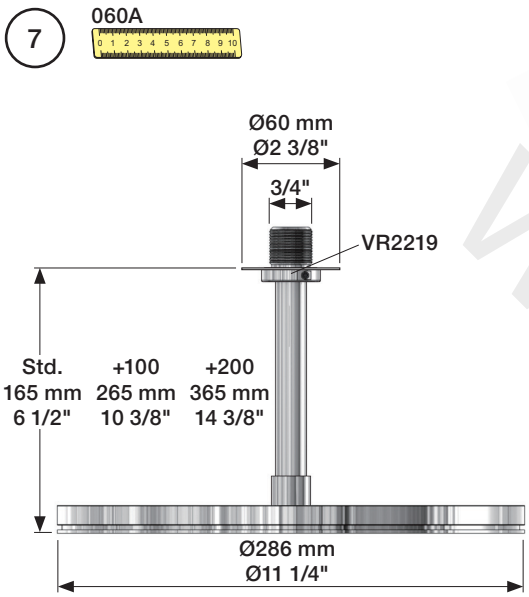

T: VR2219	T: VR648	Y	
3 - 15 mm	3 - 19 mm	110 - 98 mm	Std.
15 - 25 mm	17 - 28 mm	98 - 88 mm	+10
25 - 35 mm	27 - 38 mm	88 - 78 mm	+20
35 - 45 mm	37 - 48 mm	78 - 68 mm	+30
45 - 55 mm	47 - 58 mm	68 - 58 mm	+40
55 - 65 mm	57 - 68 mm	58 - 48 mm	+50

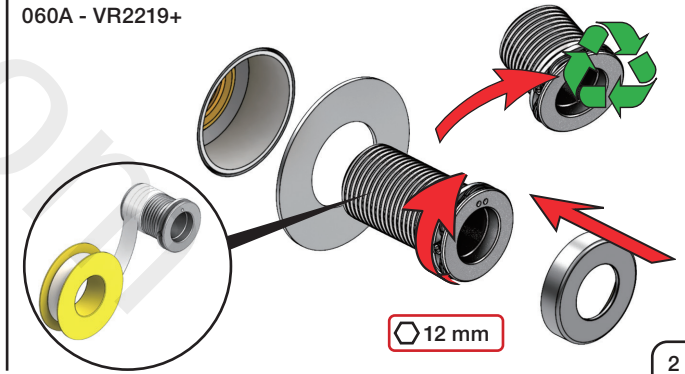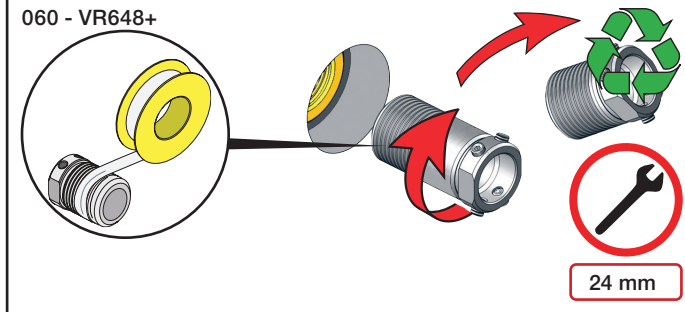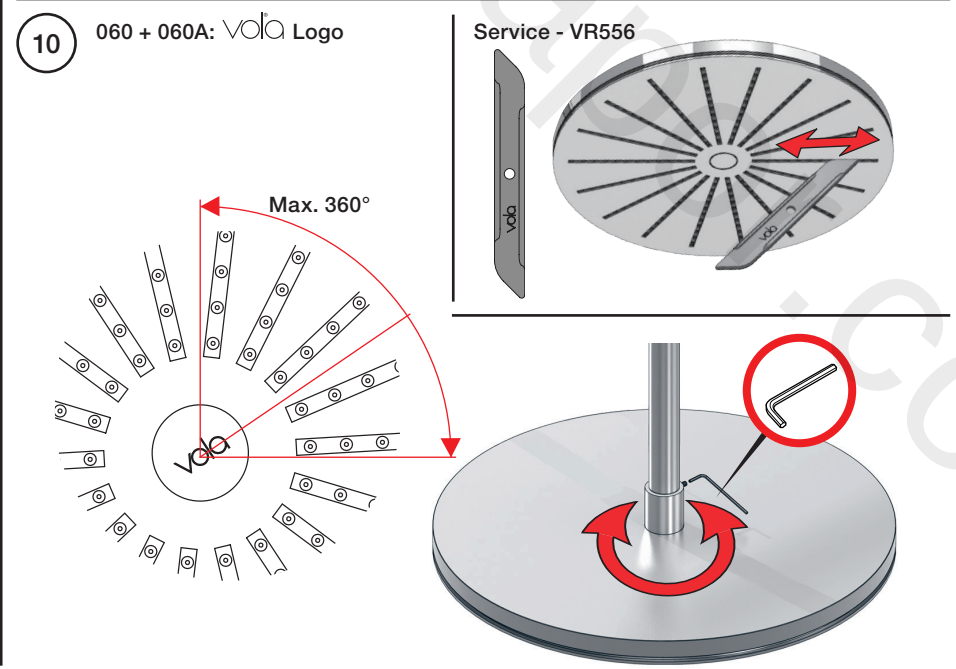

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage




T60:



T68:



T65:

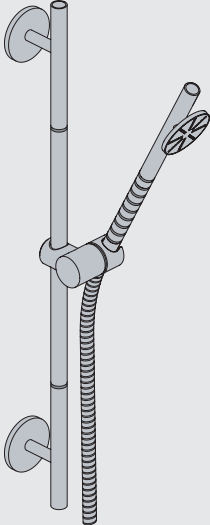

1

T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

Ø60 mm
Ø2 3/8"

2

T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

SILICONE

Ø6 mm
1/4"

25 mm
1"

001G

T8 → T68

3

T65

50 mm
2"

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

490 mm
19 1/4"

590 mm
23 1/4"

690 mm
27 1/8"

790 mm
31"

800 mm
31 1/2"

900 mm
35 3/8"

600 mm
23 5/8"

700 mm
27 1/2"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1
	Max. 65°C. 150°F					

Service - VR556

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

070

Min. 200 mm
Min. 8"

40 mm
1 5/8"



Min. 350 mm
Min. 14"

T68



USA:

Max. flow rate:
1.6 Gal/min
6.0 l/min.

4

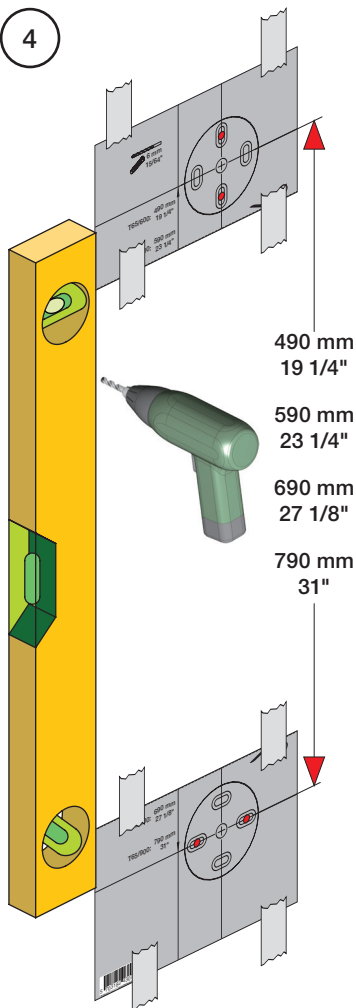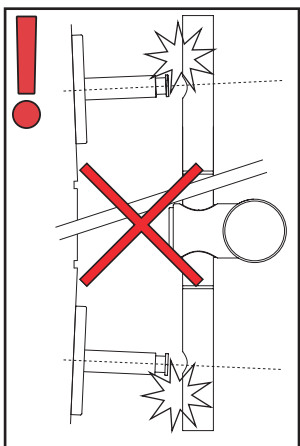490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"


5

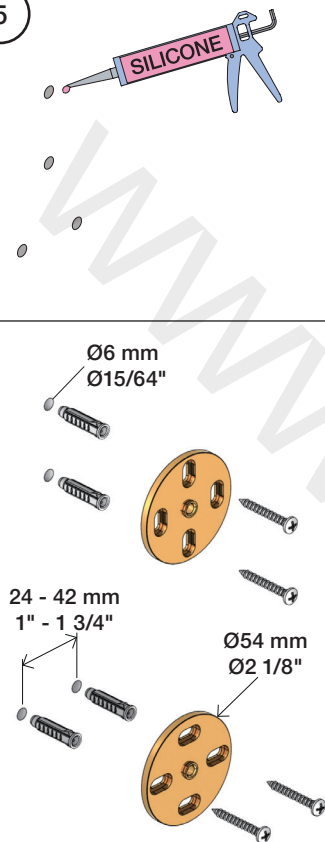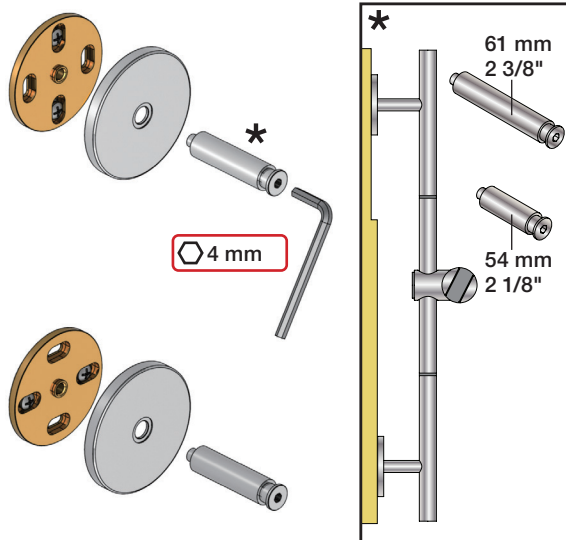Ø6 mm
Ø15/64"24 - 42 mm
1" - 1 3/4"Ø54 mm
Ø2 1/8"



4 mm

61 mm
2 3/8"54 mm
2 1/8"

6

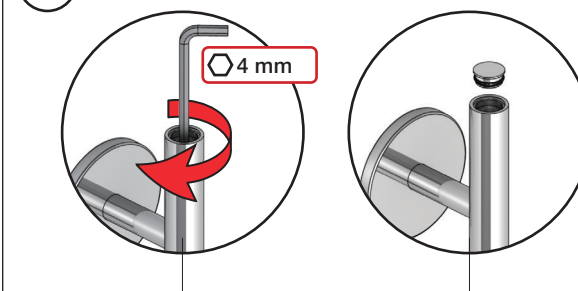

4 mm

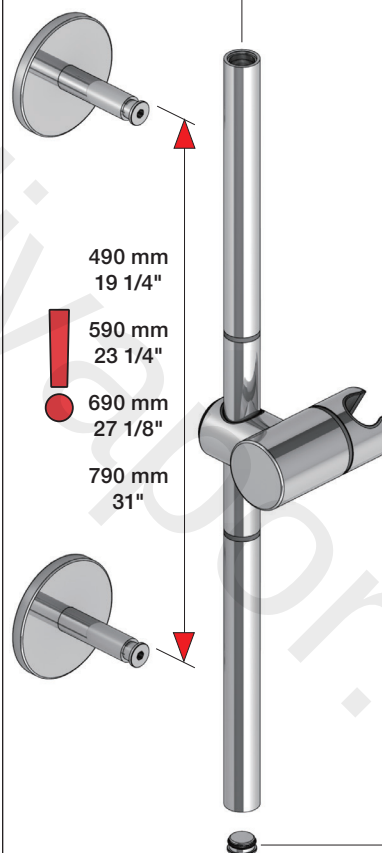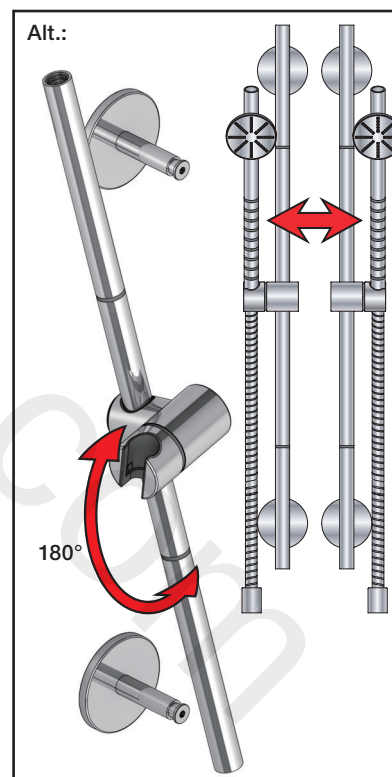490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"


Alt.:

180°

7





8

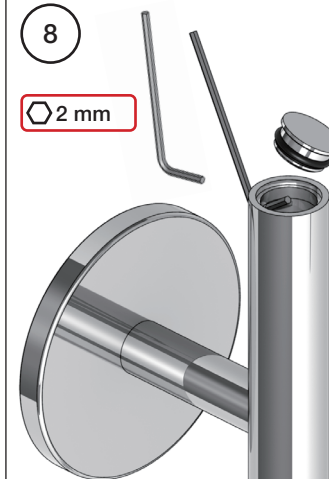

2 mm

Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
* Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana



*Membran används inte i SVERIGE, ihop med inbyggboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning
Verlängerung
Forlængelse
Modification



VR2260/VR1400/VR2019


	3 - 15 mm	Std.
Tiles:	15 - 25 mm	+10
Fliesen:	25 - 35 mm	+20
Fliser:	35 - 45 mm	+30
Tegels:	45 - 55 mm	+40
Carreaux:	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	- 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Tegels: Tiles: Fliessen: Fliiser:	3 - 15 mm	Std.
	15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
	45 - 55 mm	+40
	55 - 65 mm	+50




VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

NR 19/NR24




NR 19:
Ø40 mm
Ø1 5/8"

NR 24:
Ø43 mm
Ø1 3/4"




NR 28 - 1





		A
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 28 - 2


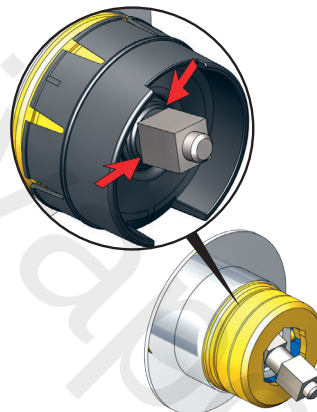


NR 19 - 1
NR 24 - 1





		A
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm

NR 19 - 2
NR 24 - 2

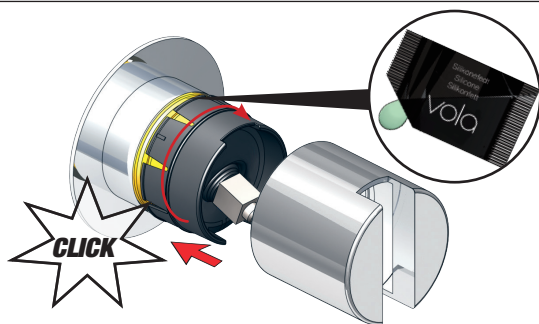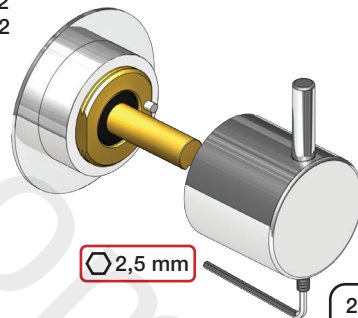

NR 28 - 4



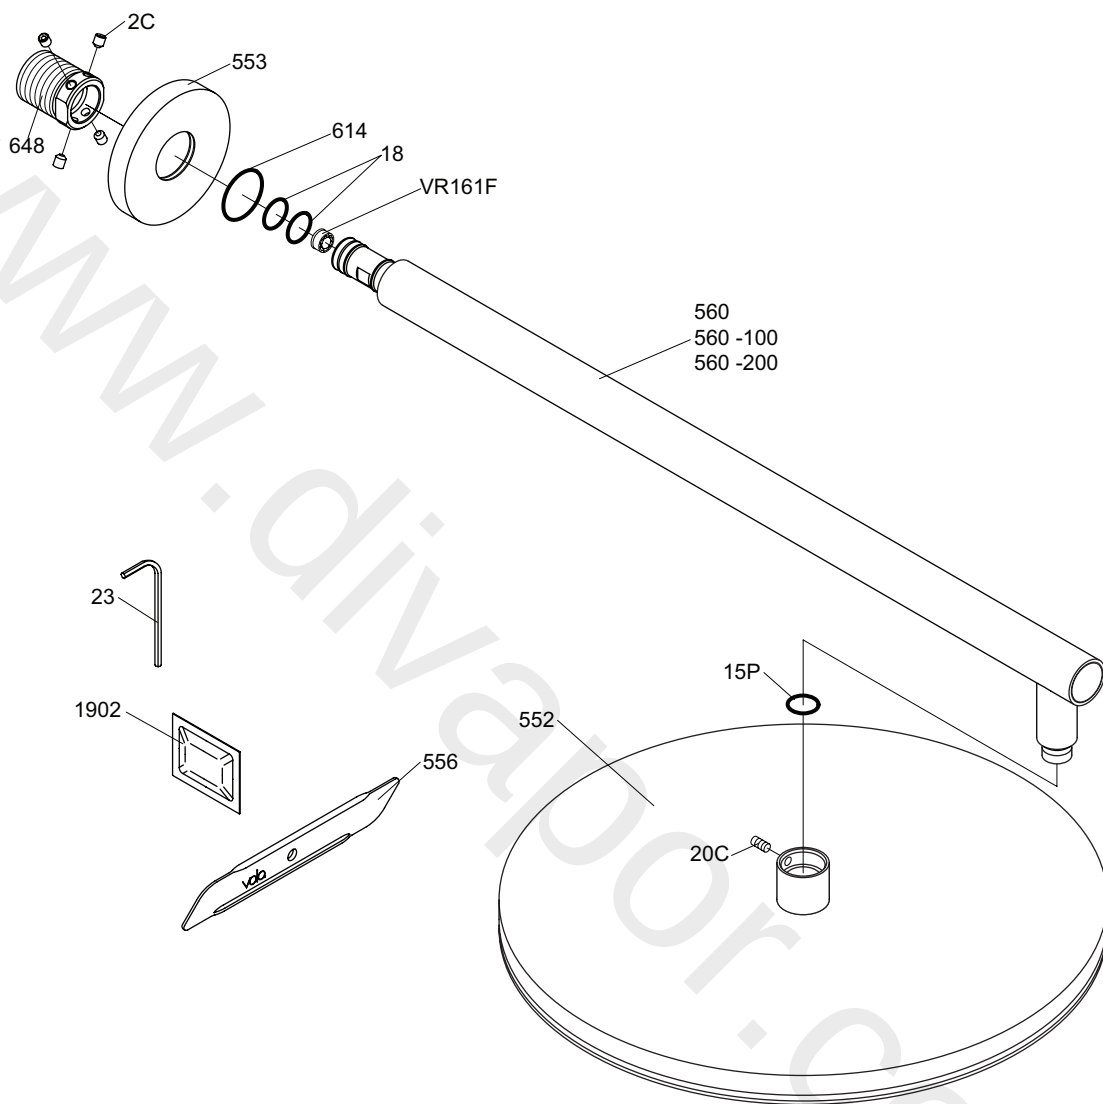


vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA 060


Date
 mar. 14

Rev.
 1

Sheet
SB 15.1

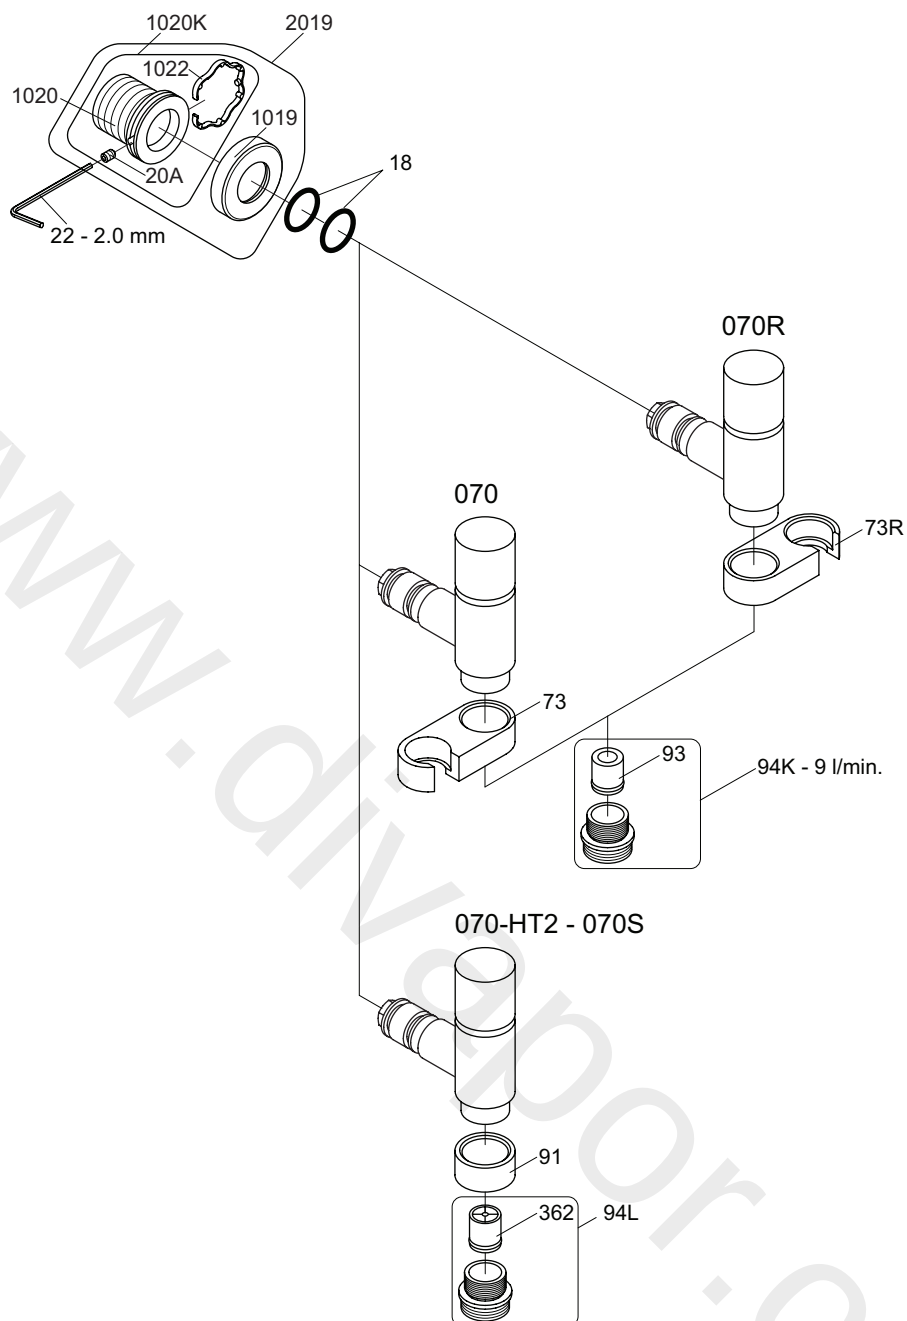

VR1020K: VR20A, VR22, VR1020, VR1022
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



volal
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@volal.com
 www.volal.com


VOLA 070, 070R 070-HT2

Date
 Apr. 21

Rev.
 5


Sheet
 SB 16

2400V

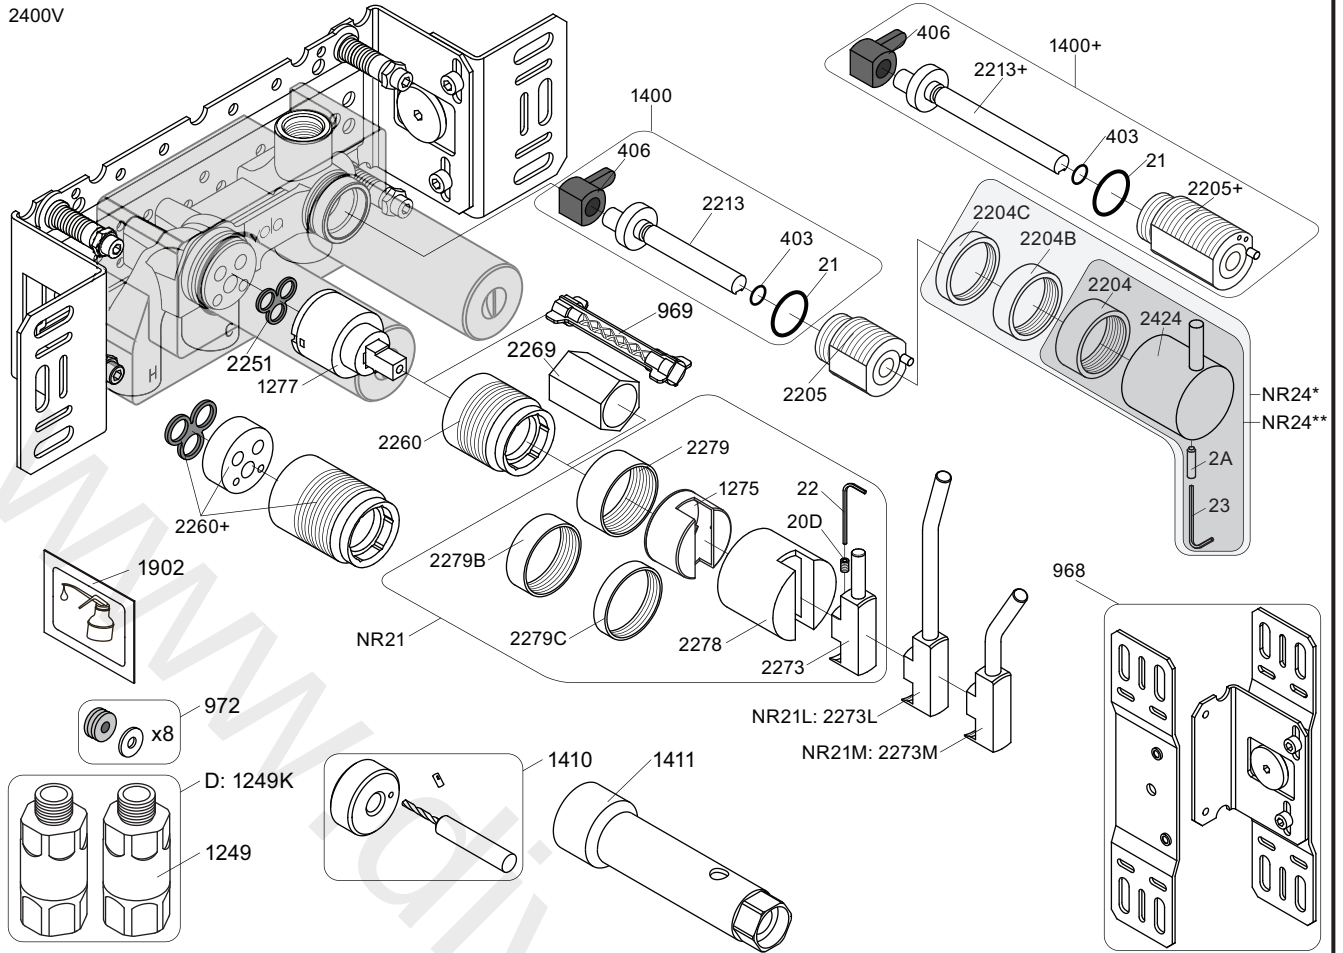


NR21: VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
 NR24*: VR2A, VR22, VR1419, VR2204, VR2204B, VR2204C - (Brass, Messing, Laiton)
 NR24**: VR2A, VR22, VR1419, VR2204 - (Stainless steel, Edelstahl, Rustfrit stål, Acier inoxydable)
 VR1277K: VR22, VR2269, VR1277
 VR1400: VR21, VR23, VR406, VR1902, VR2213



2400V

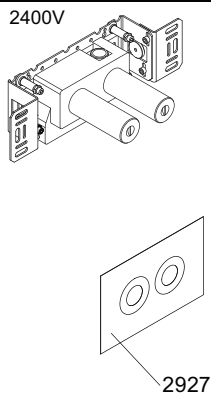


2400NV

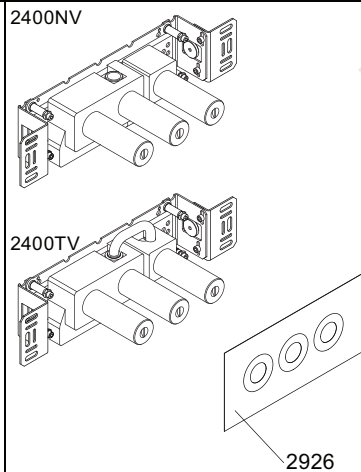


2400FV

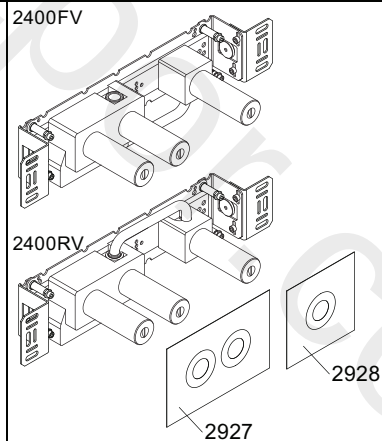


1040



2003K



2004



2003



2001, 001G



2001, 001G, 001



2001, 001G, 001



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 2400
 2400V/FV/NV/RV/TV

Date
 May. 22

Rev.
 5

Sheet
 SB 10.10