


Fitting instruction	Monteringsvägledning
Montageanleitung	Montage hanleiding
Monteringsvejledning	Manuel de montage

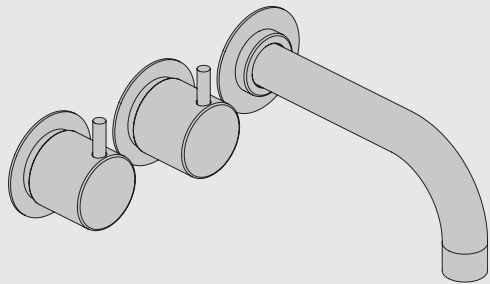



www.vola.com

2600_V4 40998509
17-08-2022

voilà



 vola.com	L	L1	L2	H	H1	D
S21V	276 mm 10 7/8"	160 mm 6 1/4"	168 mm 6 5/8"	95 mm 3 3/4"	186 mm 7 3/8"	70 mm 2 3/4"
S42V, 2700V, 2900	377 mm 14 3/4"	264 mm 10"	268 mm 10"			
2600	475 mm 18 3/4"	359 mm 14"	367 mm 14 1/2"			
2800V	552 mm 21 3/4"	439 mm 17"	447 mm 17 5/8"			

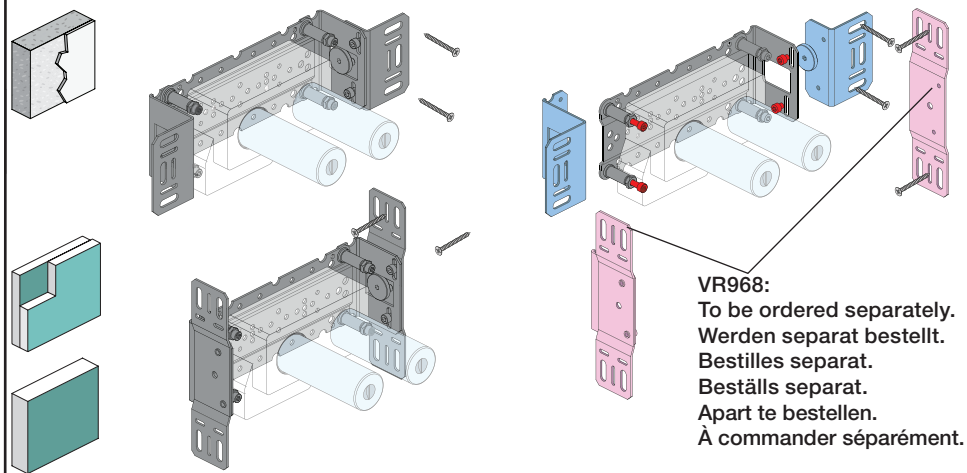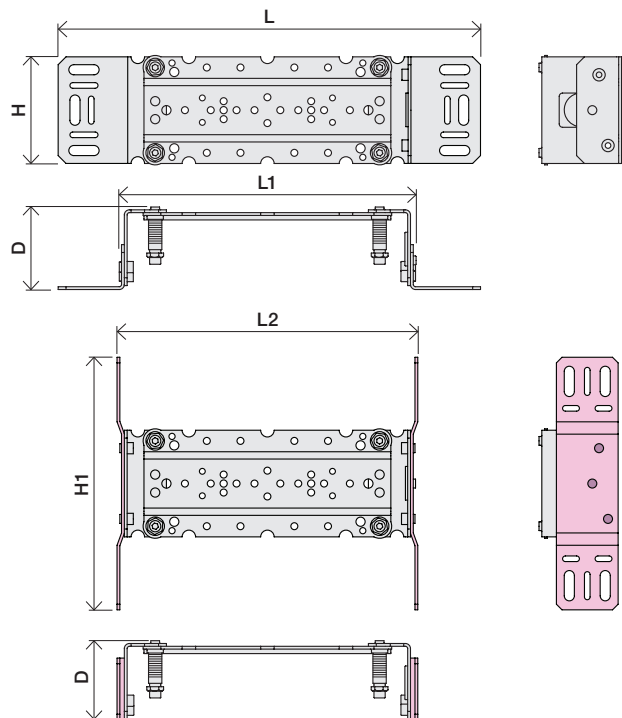


VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
 Max. 65°C, 150°F
 Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

B Check the local legislation.
 Bitte die örtlichen Vorschriften überprüfen.
 Tjek de lokale regler.
 Kontrollera lokala föreskrifter
 Nazintze lokale regelgeving.
 Vérifiez la législation locale.



**!DO NOT!
!REMOVE!**



  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten










Box till inbygggnadsblandare.
 Boks til indbyggningsblander.
 Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.


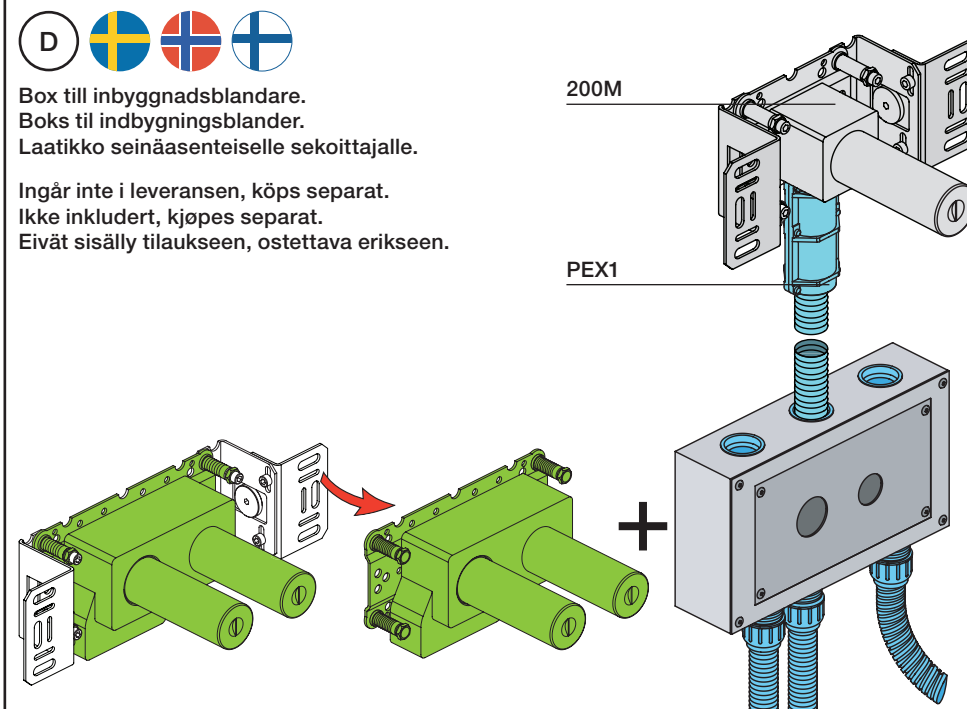


- Extension
- Verlängerung
- Forlængerdele
- Förlängning
- Aanpassing
- Modification

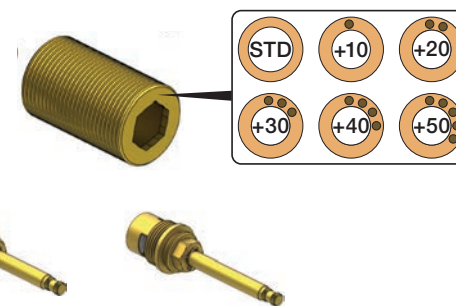

T Min. 3 mm
Max 65 mm



Y Min. 48 mm
Max. 110 mm

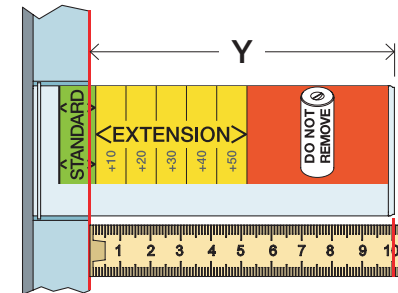

- Extension, retrofit
- Verlängerung, nachträglicher Einbau
- Forlængerdele, eftermontering
- Förlängning, eftermontering
- Aanpassing na montage
- Modification après installation

X₅₂ - 0 mm

X_{-15 - 0 mm}



	T	Y	VR699/VR2019
	5 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

	X	VR699/VR2019
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50



Fitting of extension
Montage von verlängerung





Montering af forlængerdele
Montering av förlängning

Montage van de verlengstukken
Montage des rallonges








VR699+

VR2019+, VR2119+

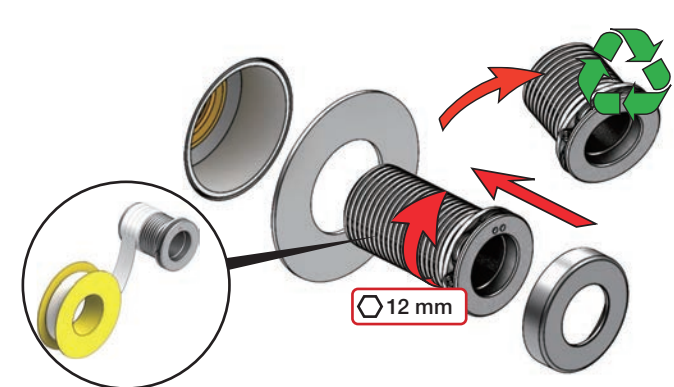
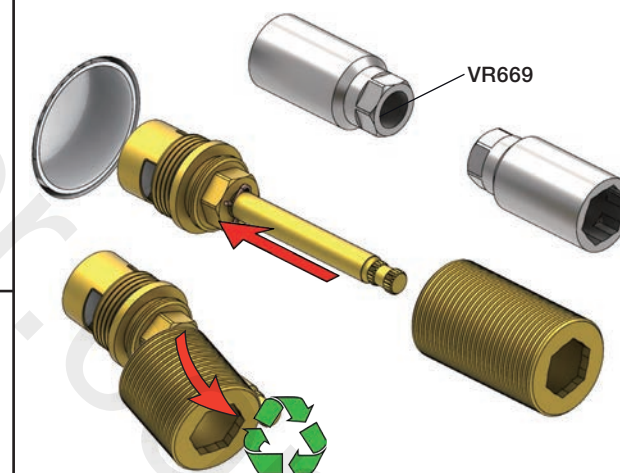


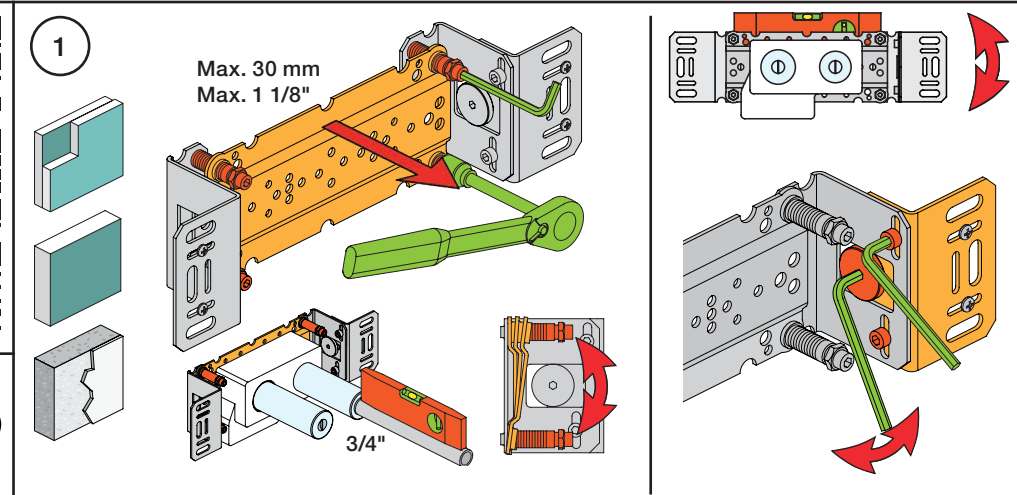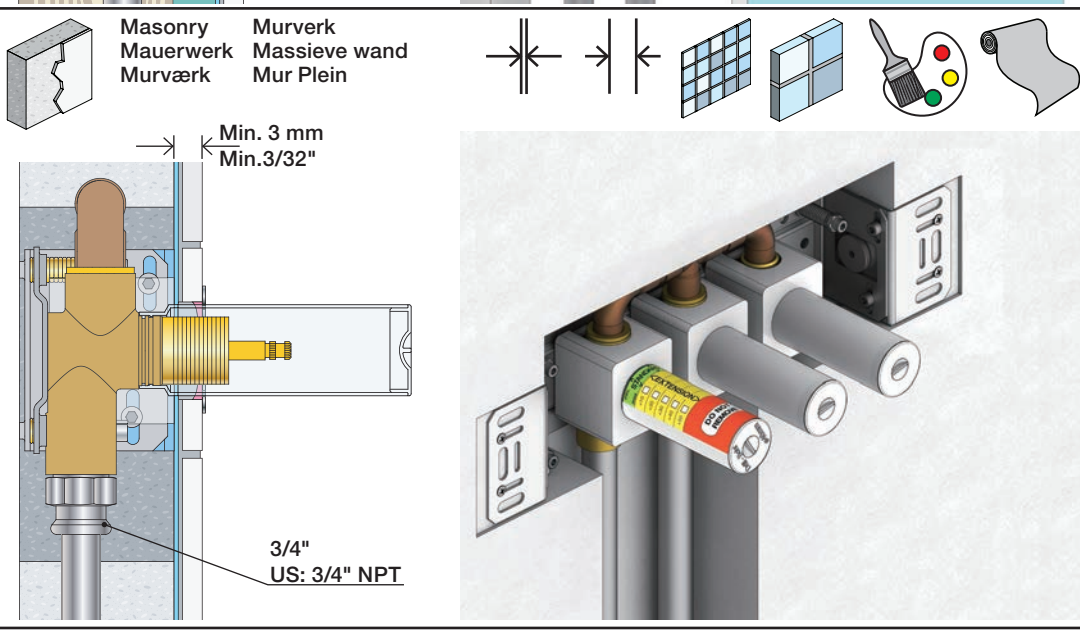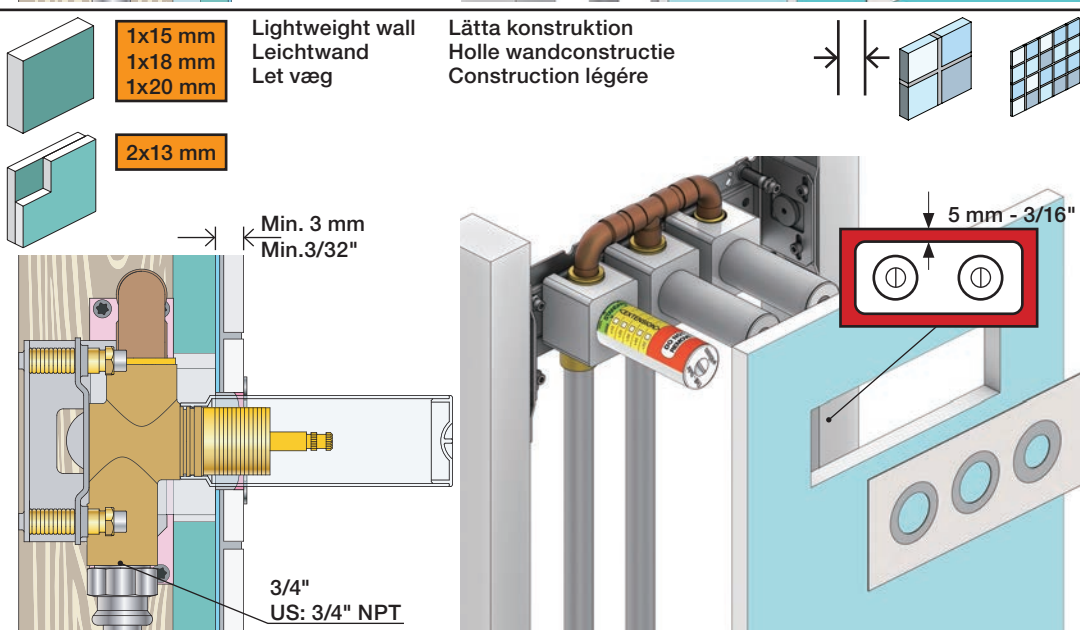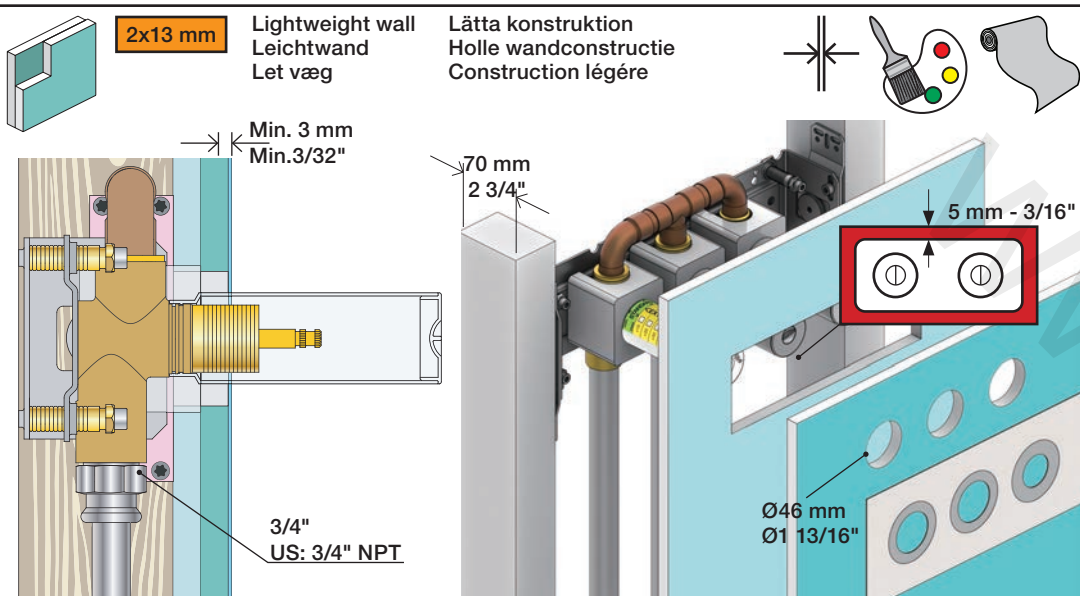

2 Test Pressure Prüfdruck testtryk Test tryk Test druk test de pression
Check the local legislation. Bitte die örtlichen Vorschriften überprüfen. Tjek de lokale regler. Kontrollera lokala föreskrifter. Nazitten lokale regelgeving. Vérifiez la législation locale.
! Water - Wasser - Vand - Vatten - Water - L'eau ! MAX 1 Minute - Minut - Minuut !

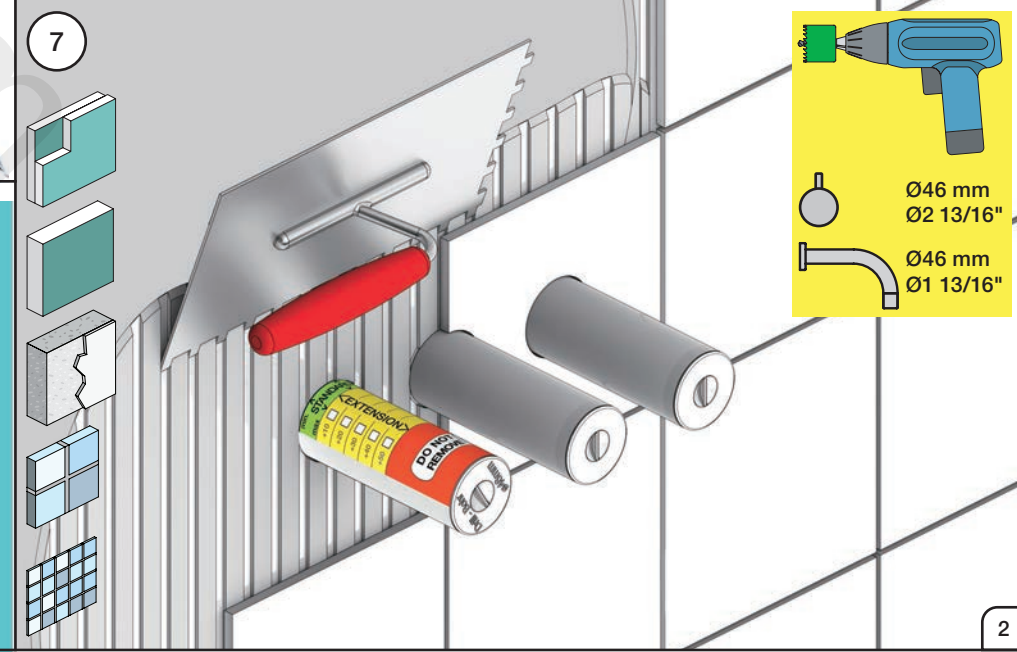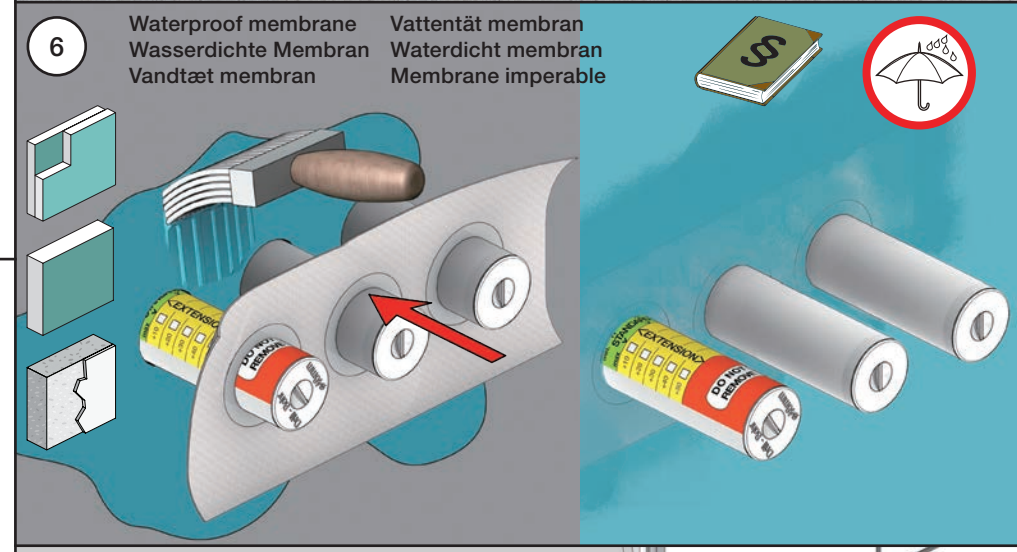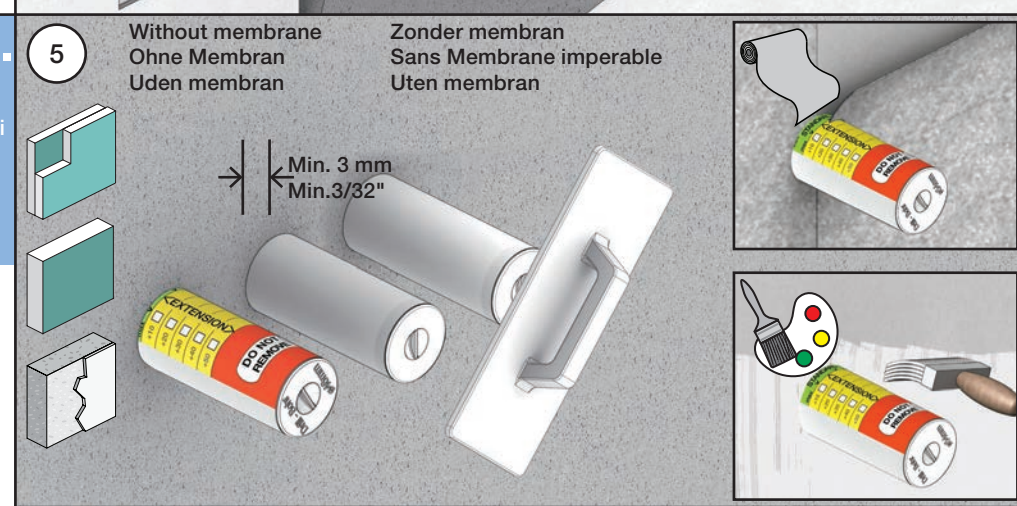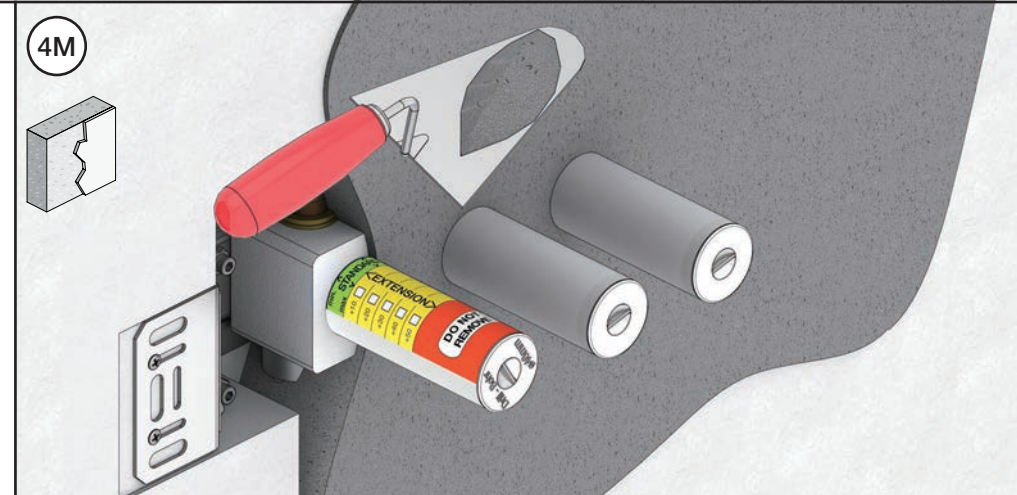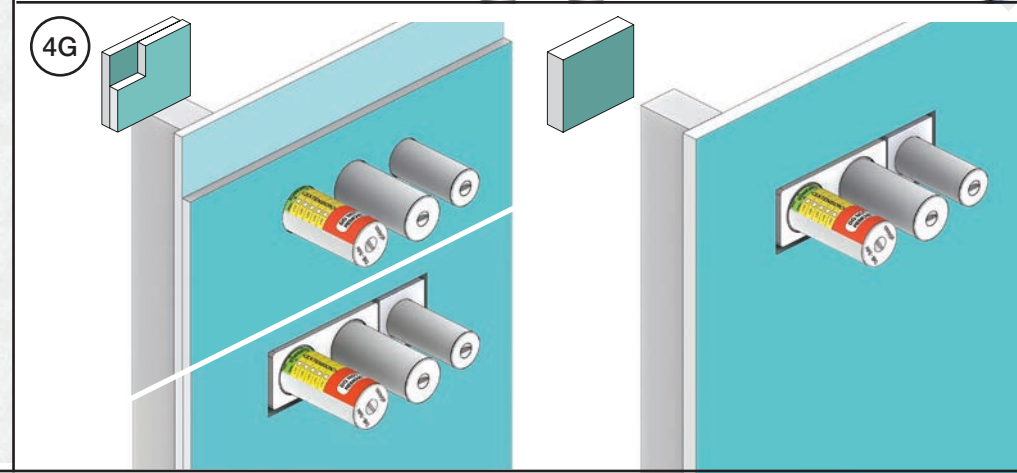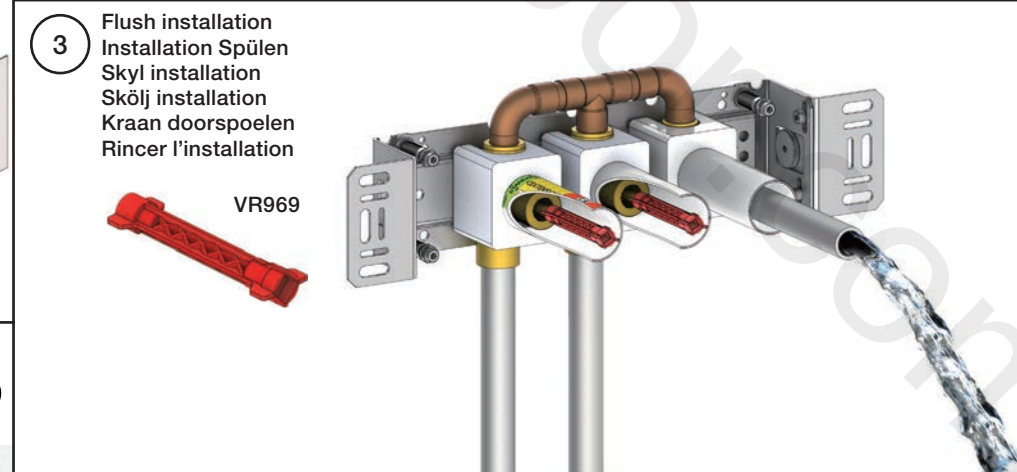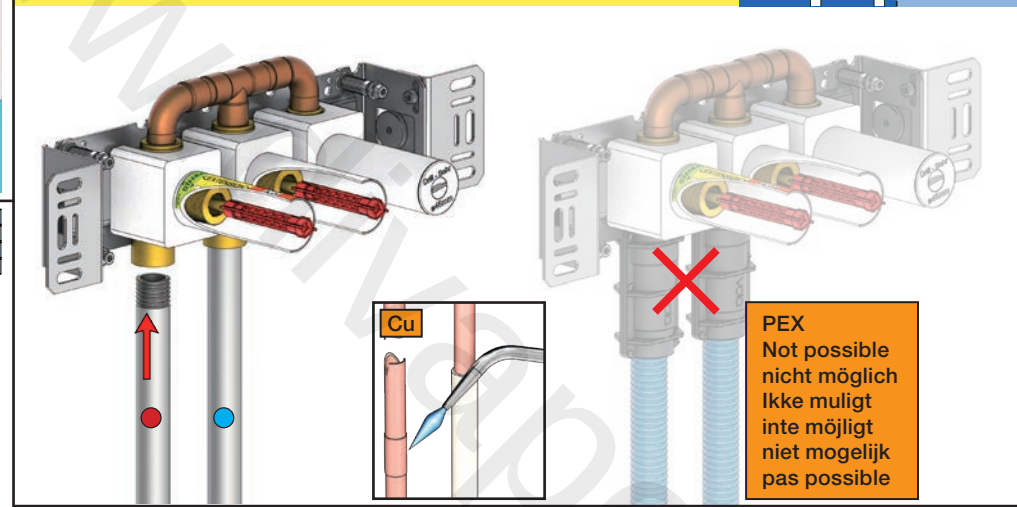


S21V

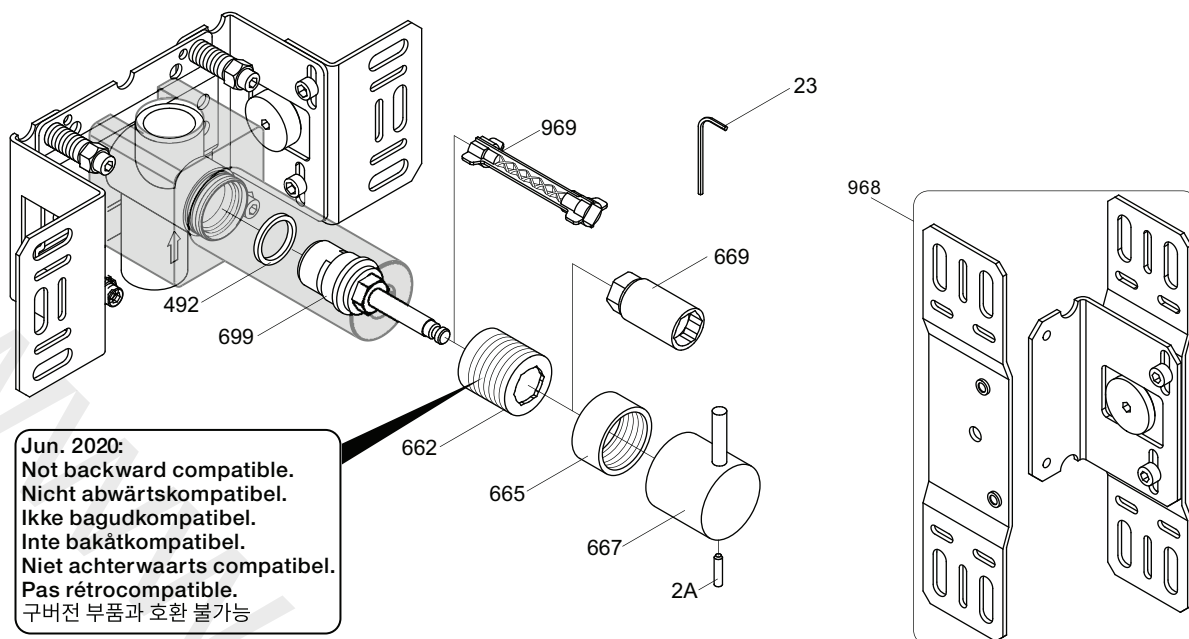

NR17: VR2A, VR23, VR665, VR667
 VR699K: VR23, VR492, VR669, VR699
 VR699K+: VR23, VR492, VR662+, VR669, VR699+

S21V 2928	S42V 2700V 2927	2600 2800V 2926	2900 2927
-	1034	003K	002
001G	2 x 001G	001, 2 x 001G	001, 001G



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 2600
 2700V, 2800V, 2900
 S21V, S42V

Date
 May. 22

Rev.
 3

Sheet
 SB 58