



VOLA 100, 100X, 200, 200V, 300  
VOLA 400DV, 400, 400V, 400N, 400NV, 400T  
VOLA 400TV, 400F, 400FV, 400R, 400RV  
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400  
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV  
VOLA 2400F, 2400FV, 2400R, 2400RV



Fitting instruction      Monteringsvægledning  
Montageanleitung      Montage hanleiding  
Monteringsvejledning      Manuel de montage

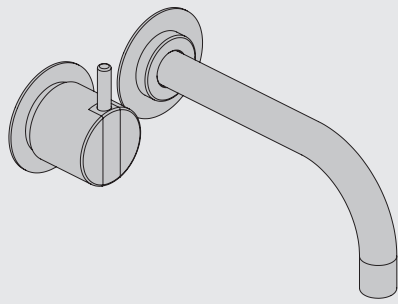

www.vola.com  
100-2100\_V3\_40998502  
17-08-2022



|                                                                      | L                 | L1            | L2                | H               | H1               | D               |
|----------------------------------------------------------------------|-------------------|---------------|-------------------|-----------------|------------------|-----------------|
| 100, 100X, 200V, 300, 400V, 400DV<br>2100, 2100X, 2200V, 2300, 2400V | 377 mm<br>14 3/4" | 260 mm<br>10" | 268 mm<br>10 1/2" | 95 mm<br>3 3/4" | 186 mm<br>7 3/8" | 70 mm<br>2 3/4" |
| 400NV, 400TV<br>2400NV, 2400TV                                       | 475 mm<br>18 3/4" | 355 mm<br>14" | 367 mm<br>14 1/2" |                 |                  |                 |
| 400FV, 400RV<br>2400FV, 2400RV                                       | 552 mm<br>21 3/4" | 435 mm<br>17" | 447 mm<br>17 5/8" |                 |                  |                 |

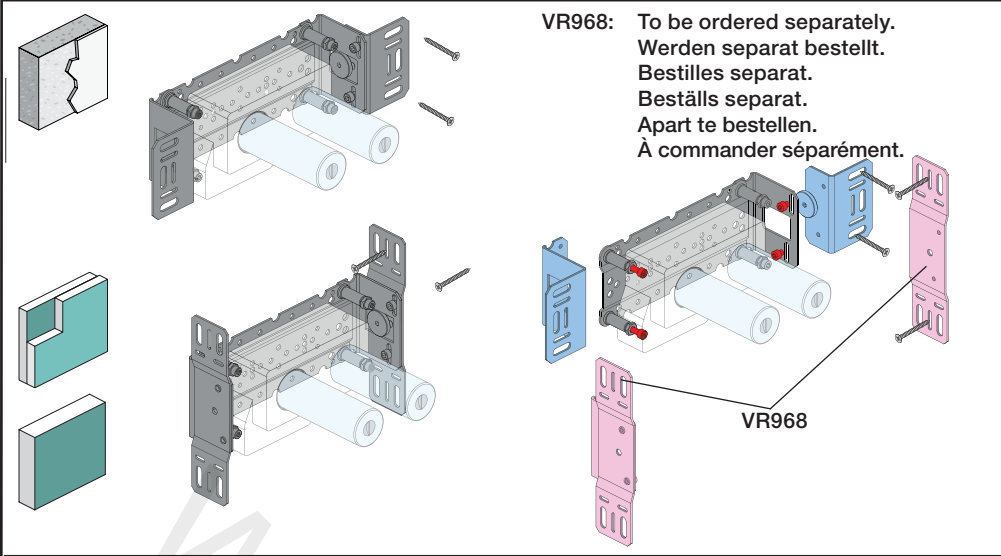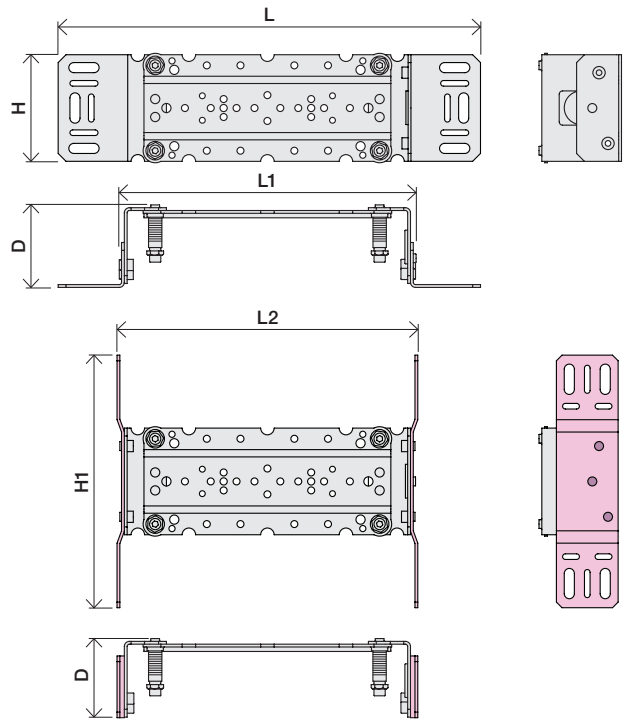

VR968: To be ordered separately.  
Werden separat bestellt.  
Bestilles separat.  
Beställs separat.  
Apart te bestellen.  
À commander séparément.

| A      | Data, 3 Bar/43.5 Psi: |          | Max. 65°C, 150°F     |
|--------|-----------------------|----------|----------------------|
|        | l/min.                | Gal/min. |                      |
| 100:   | 18,3                  | 4.8      | Max.: 10 Bar/145 psi |
| 400V:  | 15,6                  | 4.1      |                      |
| 2100:  | 25,2                  | 6.7      |                      |
| 2400V: | 22,2                  | 5.9      |                      |

**B** Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.

**!DO NOT!  
!REMOVE!**

**C** DE:  
Bitte separat beiliegende Anleitung für die Schalldämpfer VR1249 beachten

DE:  
Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten

**D**

Box till inbygggnadsblandare.  
Boks til indbygningsblander.  
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.  
Ikke inkludert, kjøpes separat.  
Eivät sisälly tilaukseen, ostettava erikseen.

Extension  
Verlängerung  
Forlængerdele  
Förlängning  
Aanpassing  
Modification

VR1260  
VR2260

STD +10 +20 +30 +40 +50

T Min. 3 mm  
Max 65 mm

Y Min. 48 mm  
Max. 110 mm

| T          | Y           | VR1260/2260/1400/2019 |
|------------|-------------|-----------------------|
| 3 - 15 mm  | 110 - 98 mm | Std.                  |
| 15 - 25 mm | 98 - 88 mm  | +10                   |
| 25 - 35 mm | 88 - 78 mm  | +20                   |
| 35 - 45 mm | 78 - 68 mm  | +30                   |
| 45 - 55 mm | 68 - 58 mm  | +40                   |
| 55 - 65 mm | 58 - 48 mm  | +50                   |

Extension, retrofit  
Verlängerung, nachträglicher Einbau  
Forlængerdele, eftermontering  
Förlängning, eftermontering  
Aanpassing na montage  
Modification après installation

X 52 - 0 mm

X -15 - 0 mm

|  | X          | VR1260 + VR1400 + VR2019 |
|--|------------|--------------------------|
|  | 40 - 52 mm | Std.                     |
|  | 30 - 40 mm | +10                      |
|  | 20 - 30 mm | +20                      |
|  | 10 - 20 mm | +30                      |
|  | 0 - 10 mm  | +40                      |
|  | -10 - 0 mm | +50                      |

|  | X           | VR2260 + VR1400 + VR2019 |
|--|-------------|--------------------------|
|  | 35 - 47 mm  | Std.                     |
|  | 25 - 35 mm  | +10                      |
|  | 15 - 25 mm  | +20                      |
|  | 5 - 15 mm   | +30                      |
|  | -5 - 5 mm   | +40                      |
|  | -15 - -5 mm | +50                      |

Fitting of extension  
Montage von verlängerung  
Montering af forlængerdele

Montering av förlängning  
Montage van de verlengstukken  
Montage des rallonges

VR1260+

VR2260+

VR2019+, VR2119+

VR1400+

400-2400



**2x13 mm** Lightweight wall  
 Leichtwand  
 Let væg




Lätta konstruktion  
 Holle wandconstructie  
 Construction légère



**1x15 mm**  
**1x18 mm**  
**1x20 mm**

Lightweight wall  
 Leichtwand  
 Let væg

Lätta konstruktion  
 Holle wandconstructie  
 Construction légère





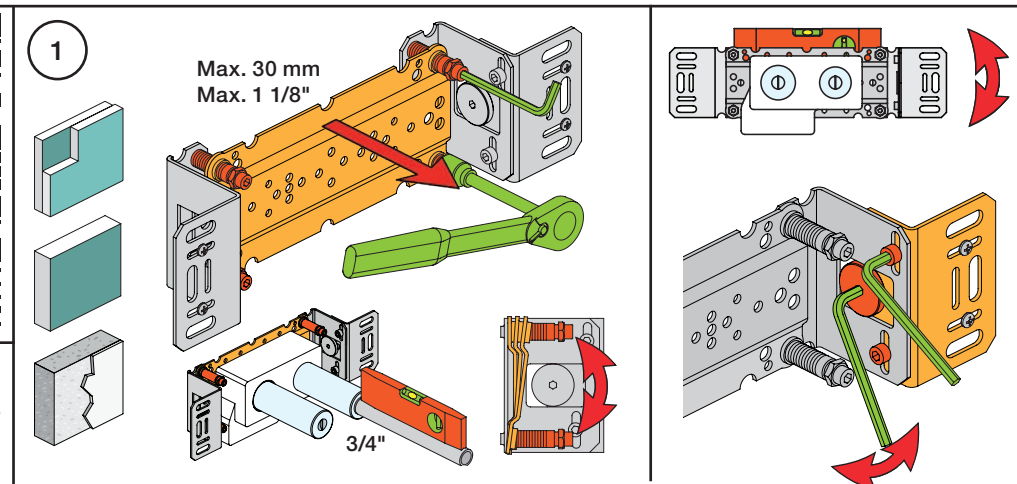
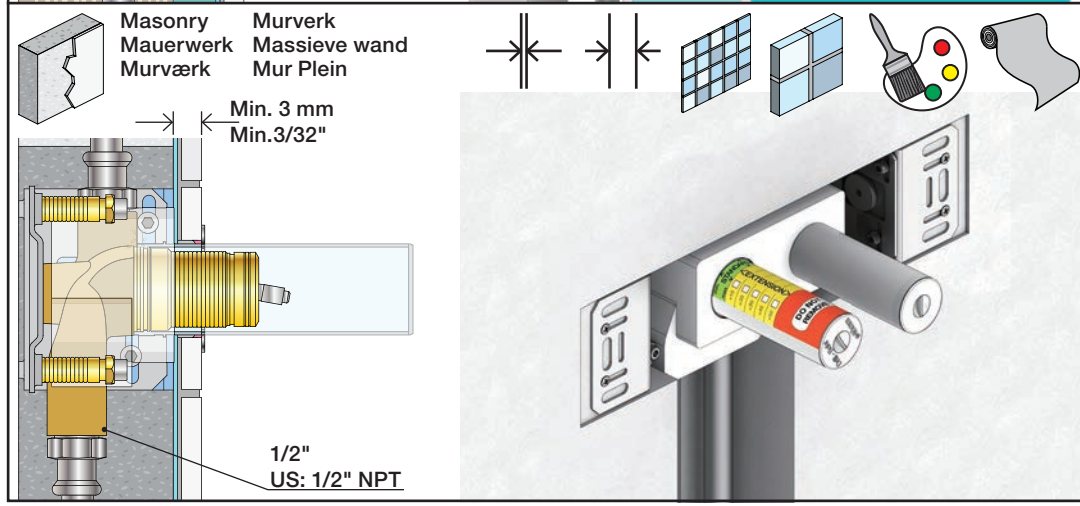
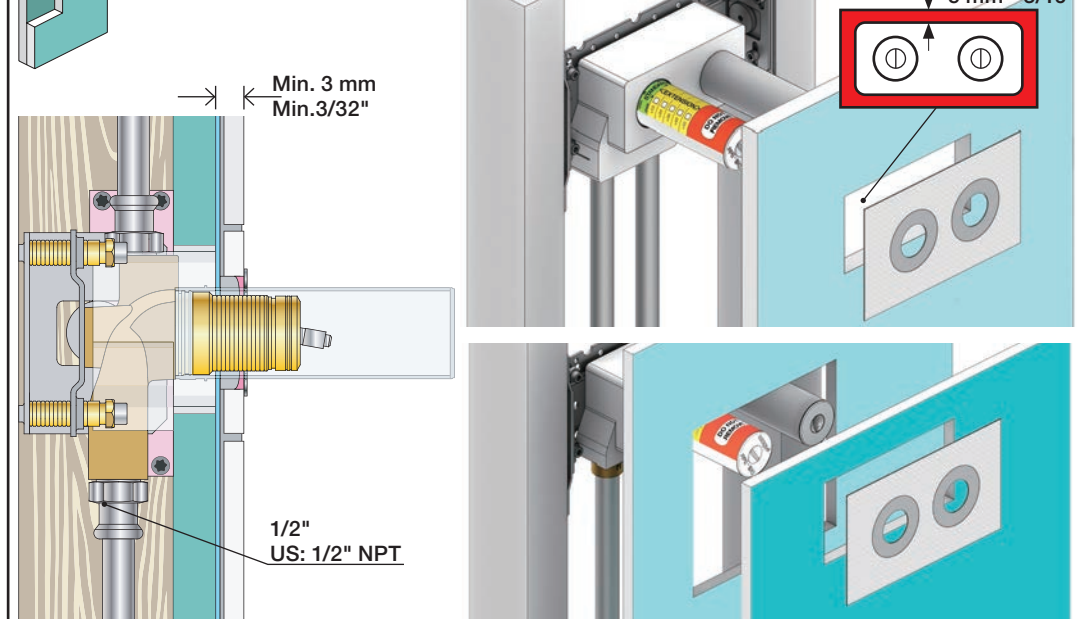


**2**

Test Pressure  
 Prüfdruck  
 testtryk  
 Test tryk  
 Test druk  
 test de pression

Check the local legislation.  
 Bitte die örtlichen Vorschriften überprüfen.  
 Tjek de lokale regler.  
 Kontrollera lokala föreskrifter.  
 Nazitten lokale regelgeving.  
 Vérifiez la législation locale.

**! Water - Wasser - Vand - Vatten - Water - L'eau !**  
**! MAX 1 Minute - Minut - Minuut !**

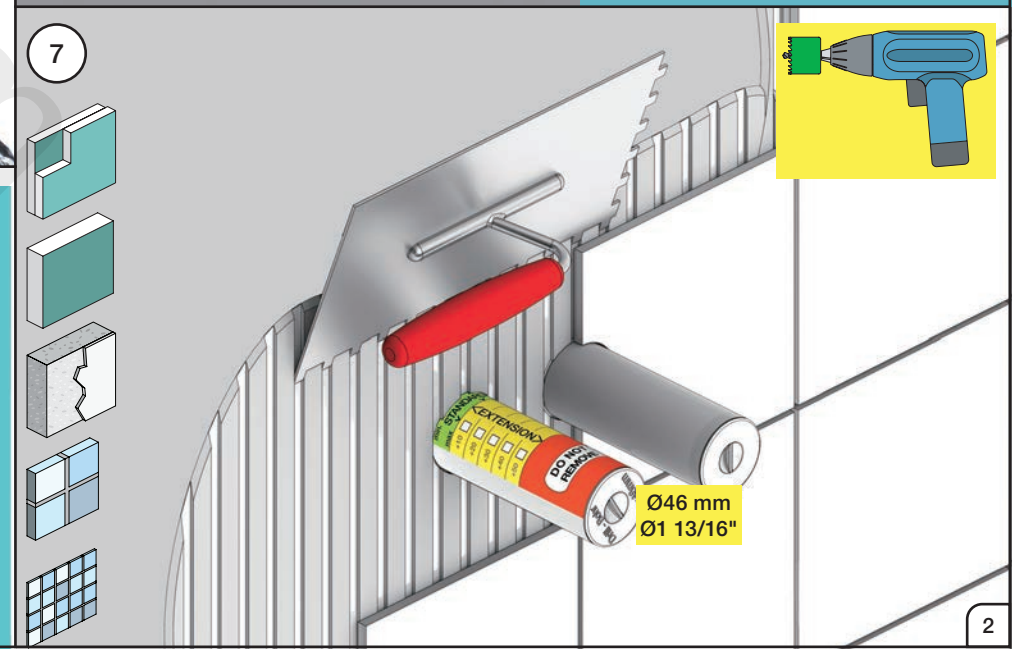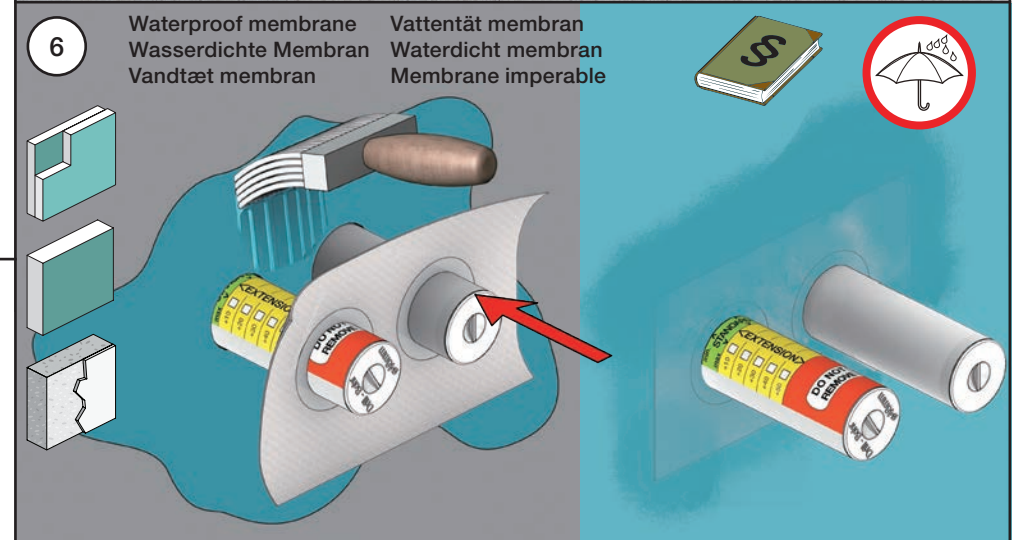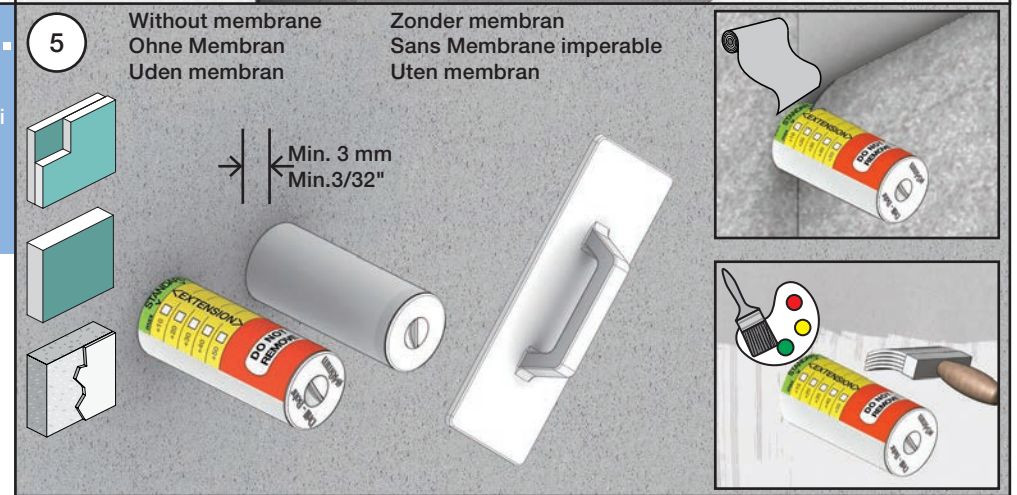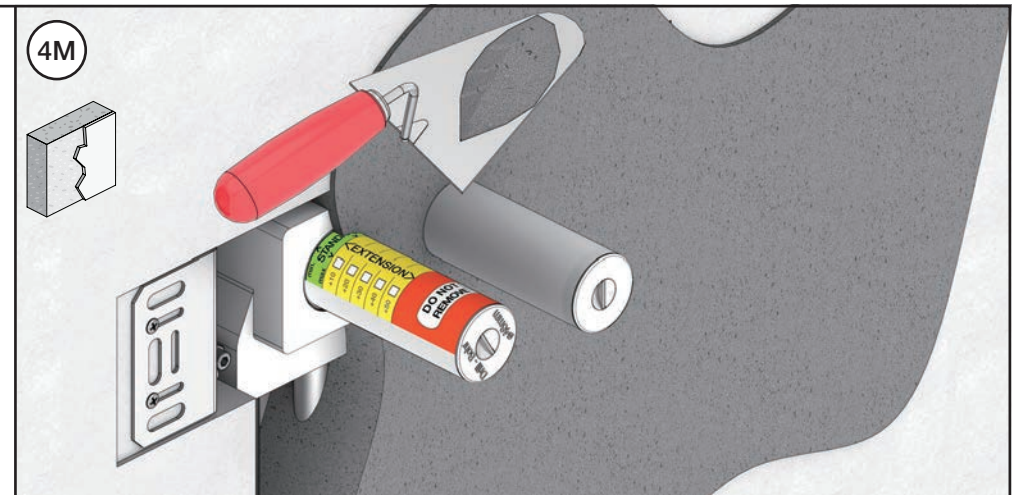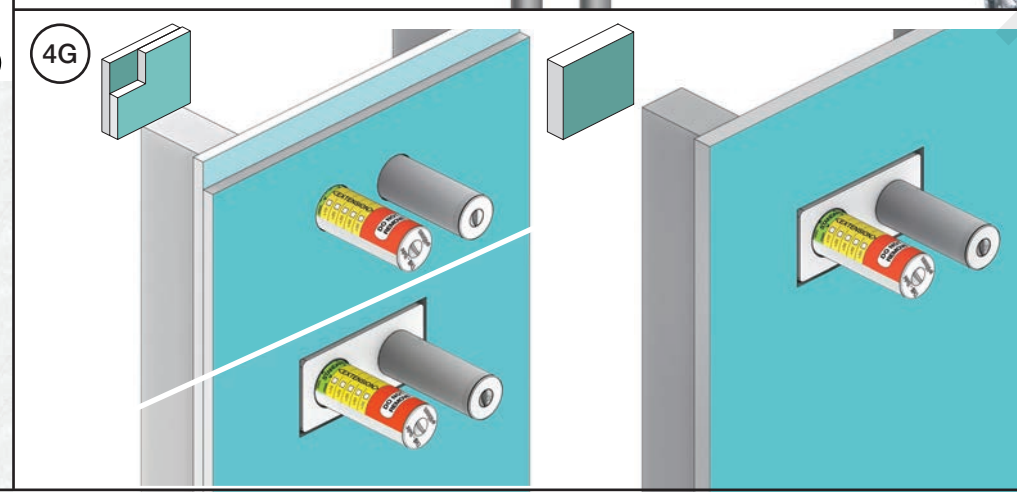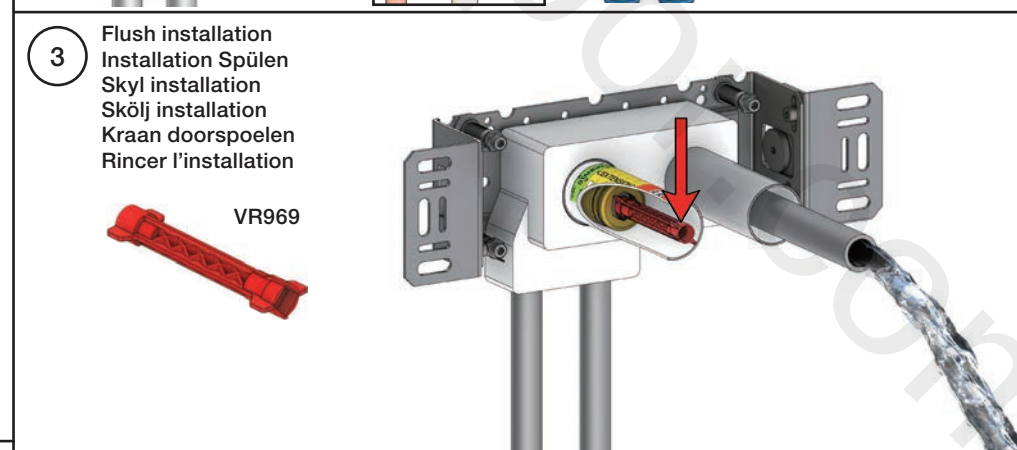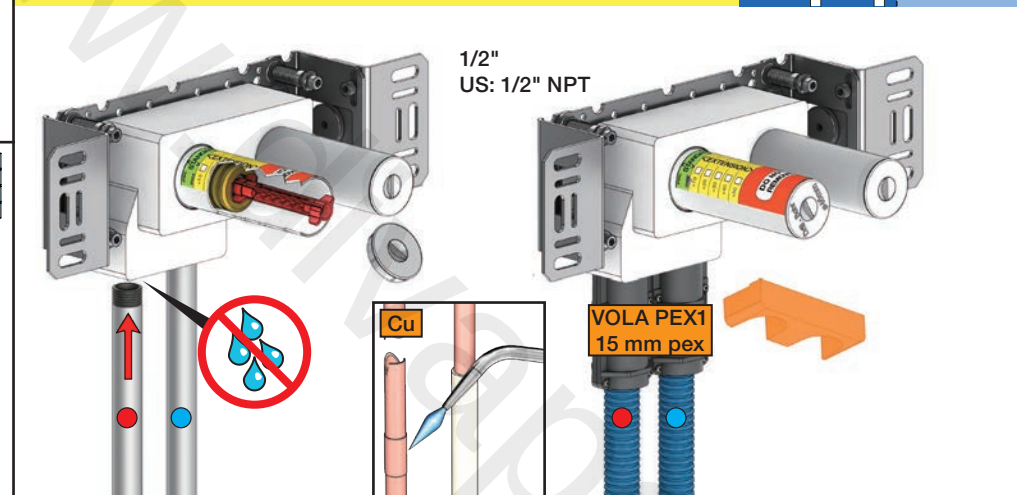

VOLA 200M

Fitting instruction  
Montageanleitung  
Monteringsvejledning

Monteringsvægledning  
Montage hanleiding  
Manuel de montage

www.vola.com

200M\_V4\_40998506

25-11-2022

5 705230 288055

Max.: 10 Bar/145 psi

Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.

Max. 65°C, 150°F

VR968:  
To be ordered separately.  
Werden separat bestellt.  
Bestilles separat.  
Beställs separat.  
Apart te bestellen.  
À commander séparément.

DE:  
Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten

Box till inbyggnadsblandare.  
Boks til indbygningsblander.  
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.  
Ikke inkludert, kjøpes separat.  
Eivät sisälly tilaukseen, ostettava erikseen.

Installation example  
Installationsbeispiel  
Installatie voorbeeld

200M & VR968:

Extension  
Verlängerung  
Forlængerdele  
Förlängning  
Verlengstukken  
Modification

|      |                          |      |
|------|--------------------------|------|
| min. | STANDARD                 | min. |
| max  |                          | max  |
| +10  | <input type="checkbox"/> | +10  |
| +20  | <input type="checkbox"/> | +20  |
| +30  | <input type="checkbox"/> | +30  |
| +40  | <input type="checkbox"/> | +40  |
| +50  | <input type="checkbox"/> | +50  |

DO NOT REMOVE

VR2019, VR2119  
VR2020, VR2219  
VR2021

\* +10 - STANDARD SVERIGE

| T: VR2019/2020/2021/2119/2219 | T: VR648   | Y           |      |
|-------------------------------|------------|-------------|------|
| 3 - 15 mm                     | 3 - 19 mm  | 110 - 98 mm | Std. |
| 15 - 25 mm                    | 17 - 28 mm | 98 - 88 mm  | +10  |
| 25 - 35 mm                    | 27 - 38 mm | 88 - 78 mm  | +20  |
| 35 - 45 mm                    | 37 - 48 mm | 78 - 68 mm  | +30  |
| 45 - 55 mm                    | 47 - 58 mm | 68 - 58 mm  | +40  |
| 55 - 65 mm                    | 57 - 68 mm | 58 - 48 mm  | +50  |

|      |                 |  |
|------|-----------------|--|
| Std. | 26 mm<br>1"     |  |
| +10  | 36 mm<br>1 3/8" |  |
| +20  | 46 mm<br>1 3/4" |  |
| +30  | 56 mm<br>2 1/4" |  |
| +40  | 66 mm<br>2 1/2" |  |
| +50  | 76 mm<br>3"     |  |

Fitting of extension  
Montage von verlängerung  
Montering af forlængerdele  
Montering av förlängning  
Montage van de verlengstukken  
Montage des rallonges


VR2019+, VR2119+  
VR2020+, VR2219+  
VR2021+

VR648+



**2x13 mm** Lightweight wall  
Leichtwand  
Let væg

Lätta konstruktion  
Holle wandconstructie  
Construction légère

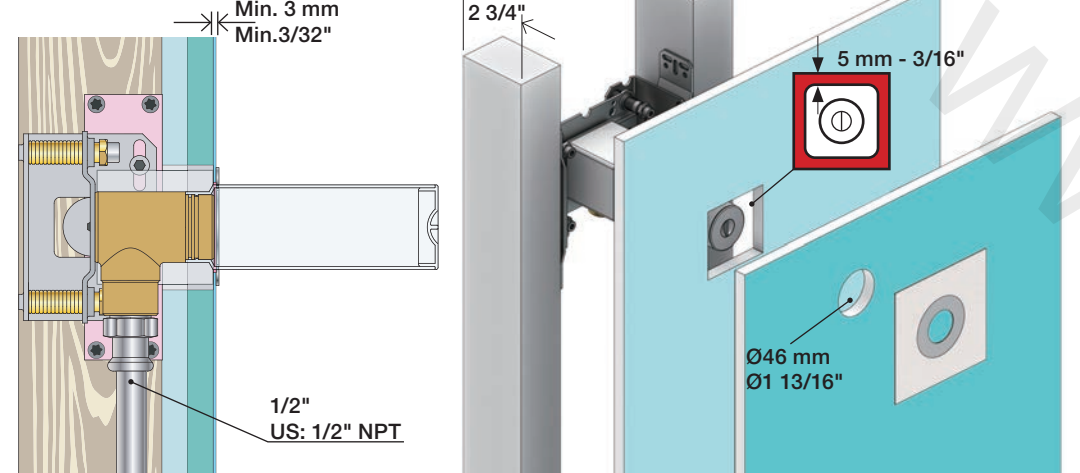

**1x15 mm**  
**1x18 mm**  
**1x20 mm**

Lightweight wall  
Leichtwand  
Let væg

Lätta konstruktion  
Holle wandconstructie  
Construction légère



**Masonry**  
Mauerwerk  
Murværk

**Murverk**  
Massieve wand  
Mur Plein








**2**

Test Pressure  
Prüfdruck  
testtryk  
Test tryck  
Test druk  
test de pression


Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter.  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.

**! Water - Wasser - Vand - Vatten - Water - L'eau**  
**! MAX 1 Minute - Minut - Minuut !**

**1.** MAX. 16 Bar 232 Psi  
**2.** MAX. 4 Bar 58 Psi

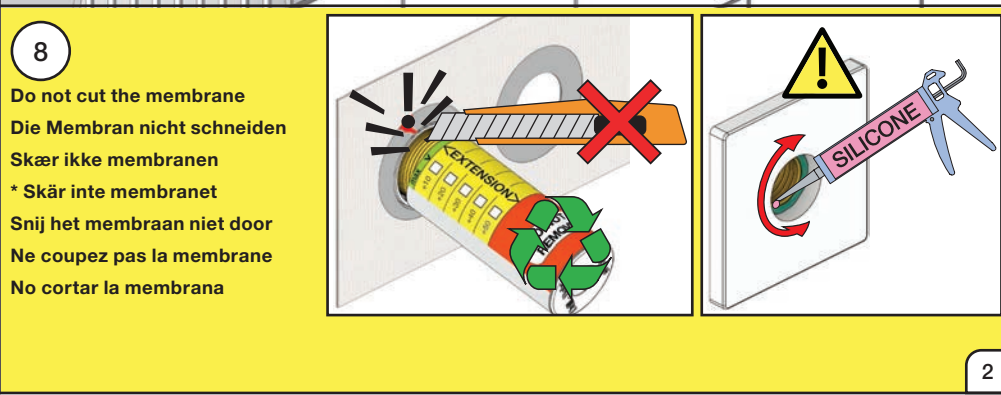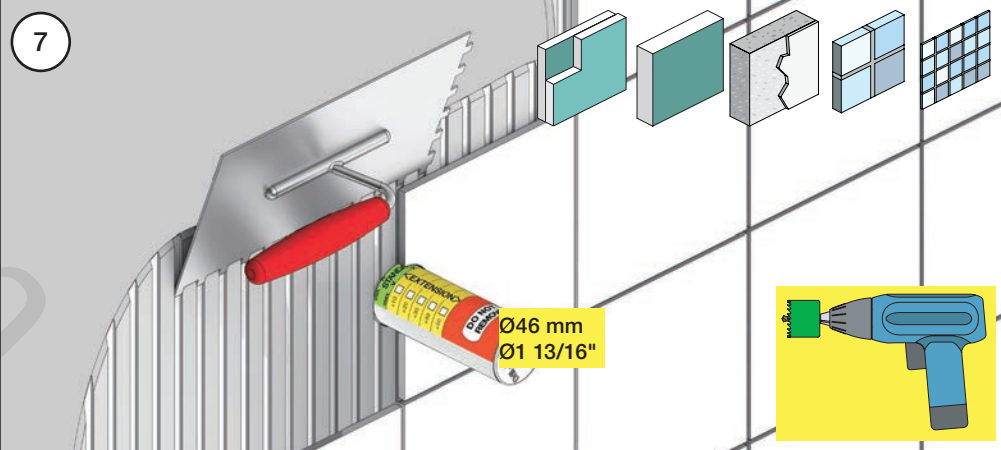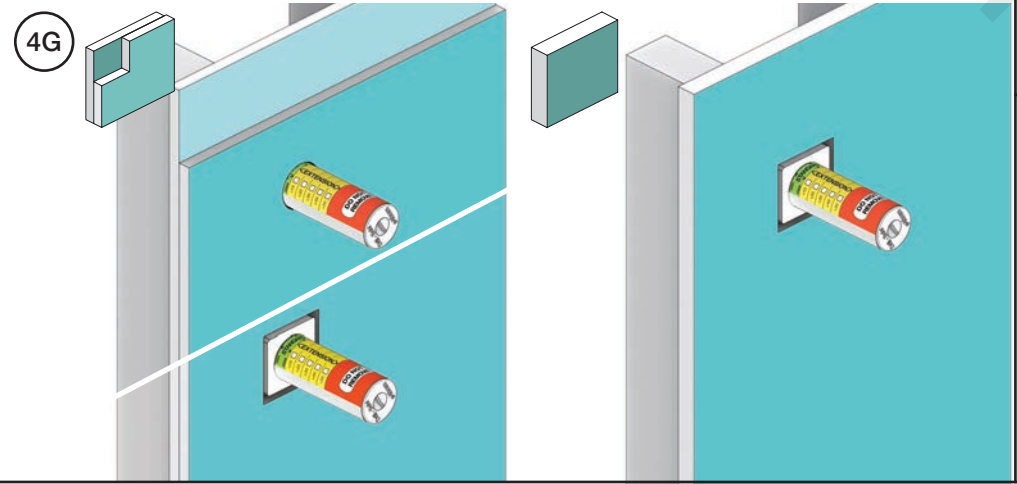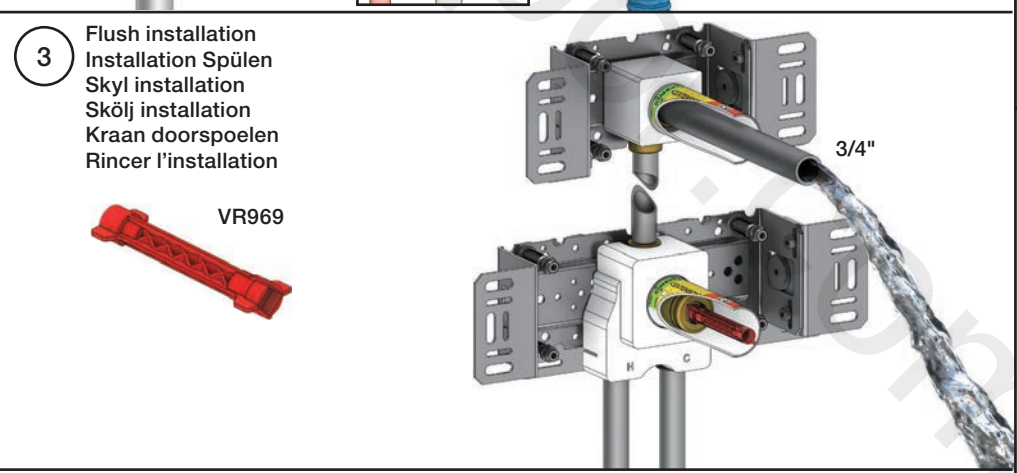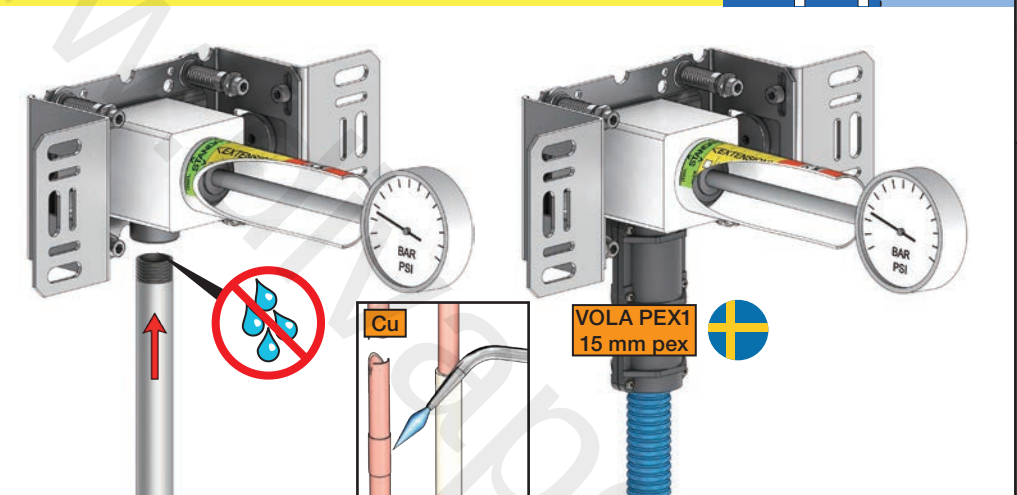



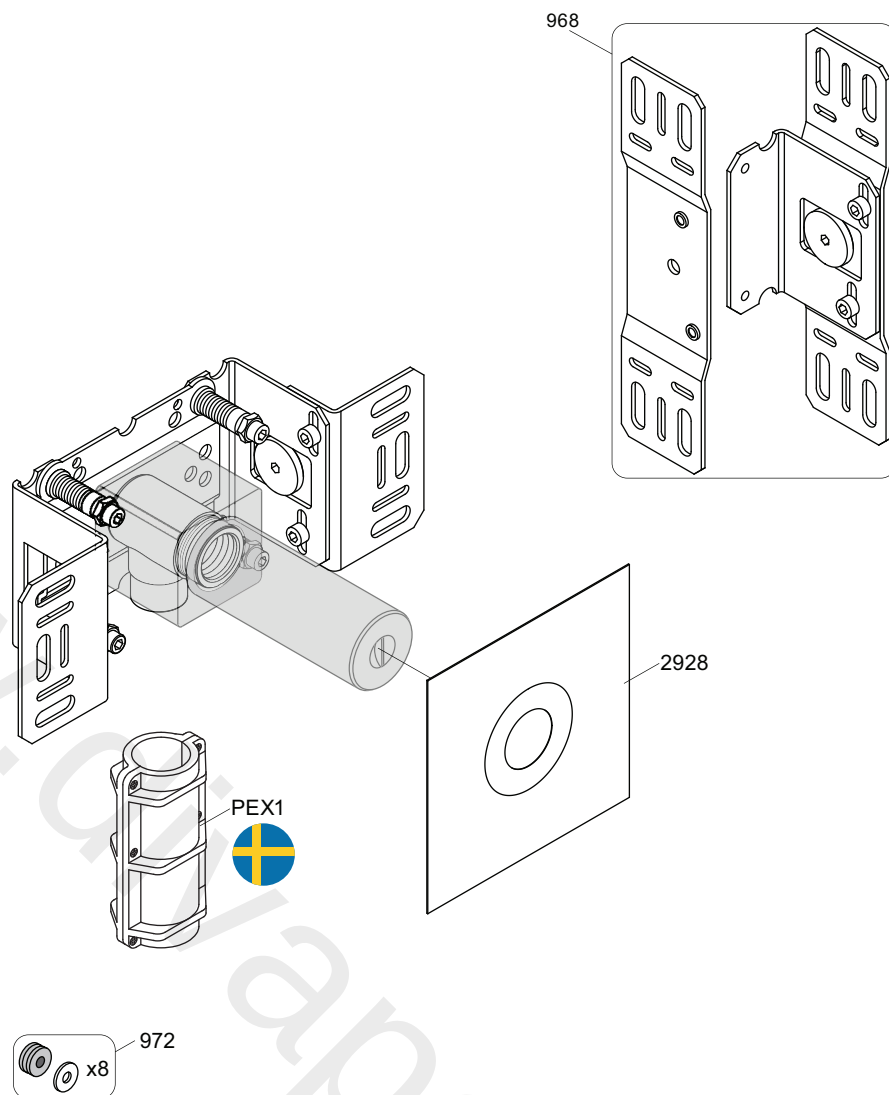

vola

Lunavej 2  
DK-8700 Horsens  
Tlf : + 45 7023 5500  
sales@vola.com  
www.vola.com

**VOLA 200M**

Date  
May. 22

Rev.  
3

Sheet  
SB 2.3