

VOLA 500, 590, 500T1

VOLA 2500

VOLA SC1, SC3, SC5, SC7, SC9, SC10, SC12

Fitting instruction

Montageanleitung

Monteringsvejledning

Monteringsvægledning


Montage hanleiding

Manuel de montage

590:



GODKENDT
TIL DRIKKEVAND



www.vola.com

500 - 2500_V0_40998137
01-01-2023



5 705230 492964






vola

Data, 3 Bar /43.5 Psi:

	l/min.	Gal/min.
500:	14,5	3.8
590:	9,0	2.4
500-T1:	11,0	2.9
2500:	18,7	4.9
SC1:	18,7	4.9
SC5, 7:	18,0	4.8
SC9:	11,0	2.9

Max. 65°C, 150°F

500/2500:

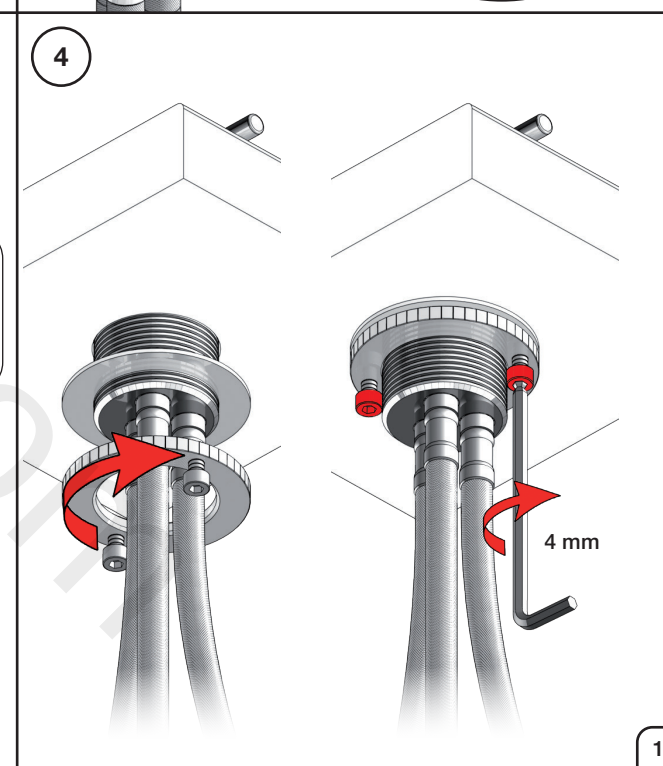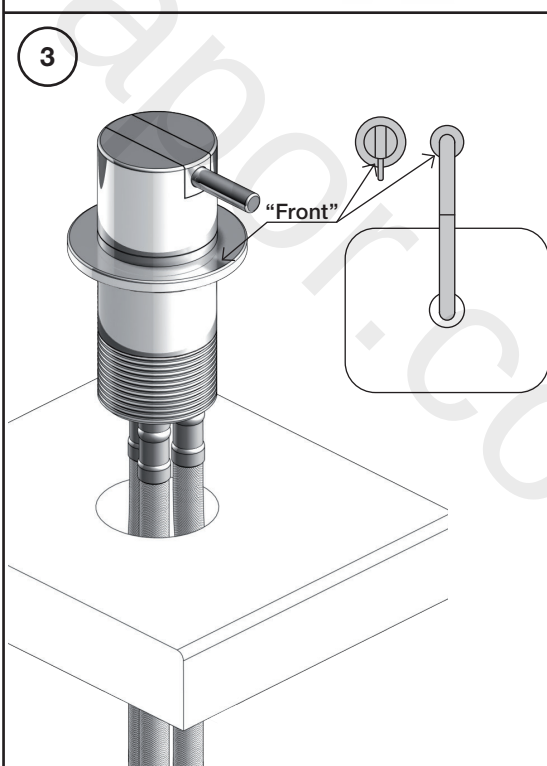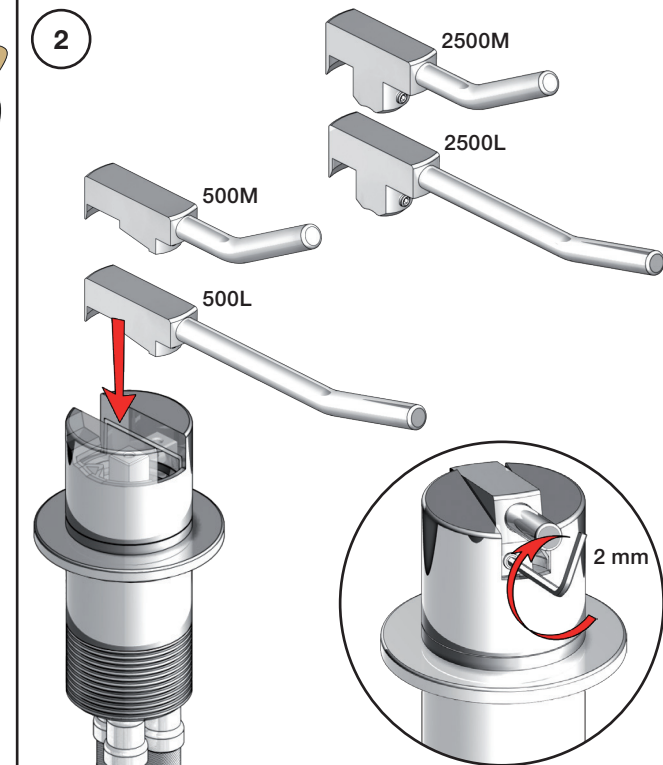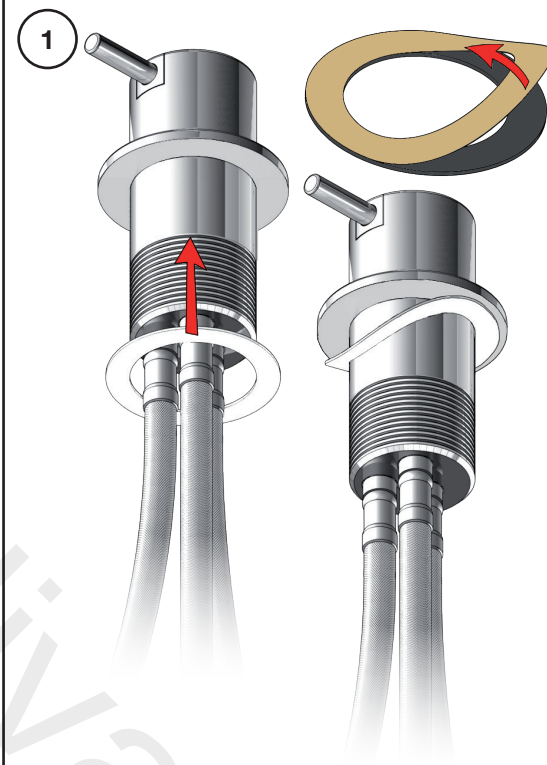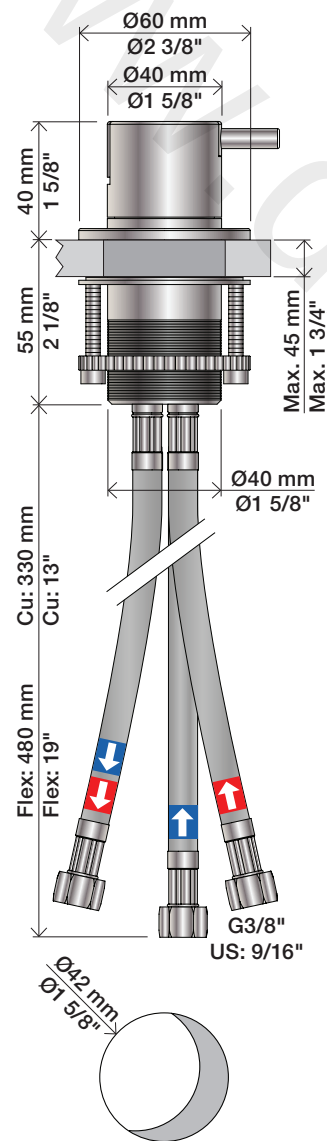


5



6

090


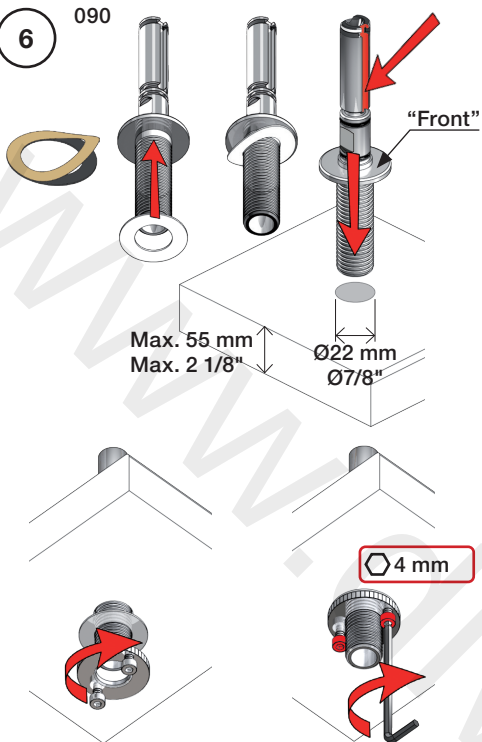


6A


090

mm:	H	D	h
090	210	200	145
090A	110	85	40
090B	185	100	114
090C	185	100	114
090D	220	200	130
090E	170	200	65
090G	185	140	105
090H	265	220	155
090I	325	220	215
090V	355	145	270

Inches:	H	D	h
090	8 1/2"	8"	5 3/4"
090A	4 1/4"	3 1/2"	1 1/2"
090B	7"	4"	4 1/2"
090C	7"	4"	4 1/2"
090D	8 3/4"	8"	5"
090E	6 3/4"	8"	2 1/2"
090G	7"	5 1/2"	4"
090H	10 1/2"	8 5/8"	6"
090I	12 3/4"	8 5/8"	8 1/2"
090V	14"	5 3/4"	10 1/2"

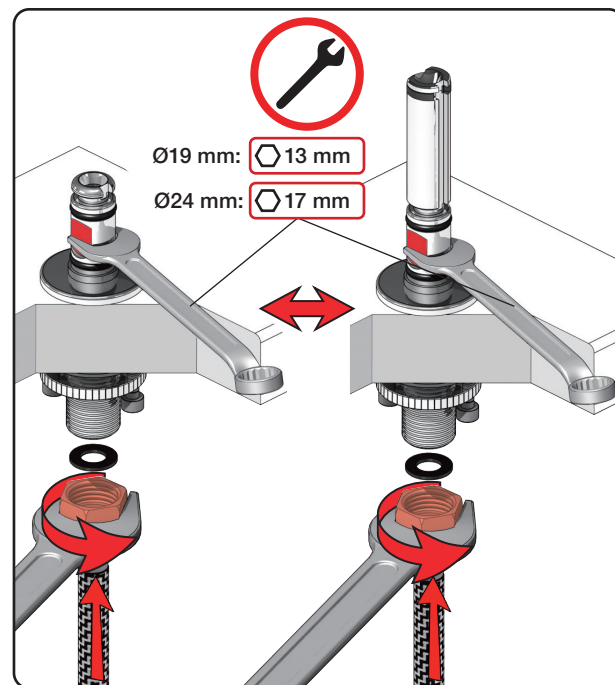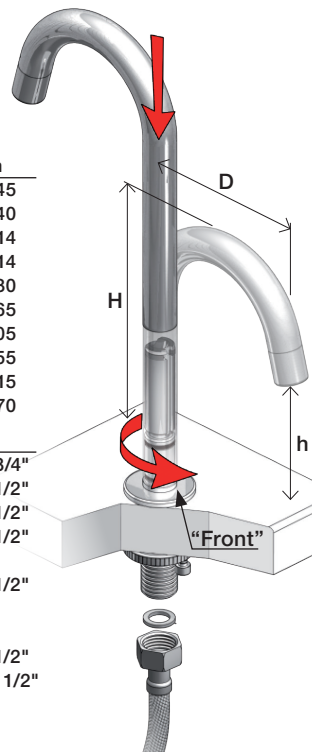


6B

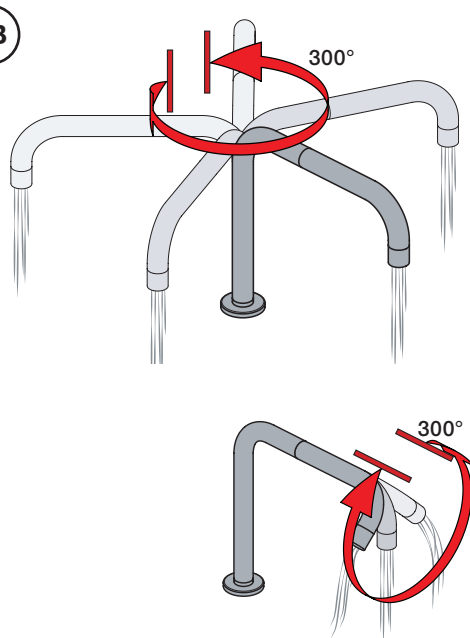


7





T1, T1S

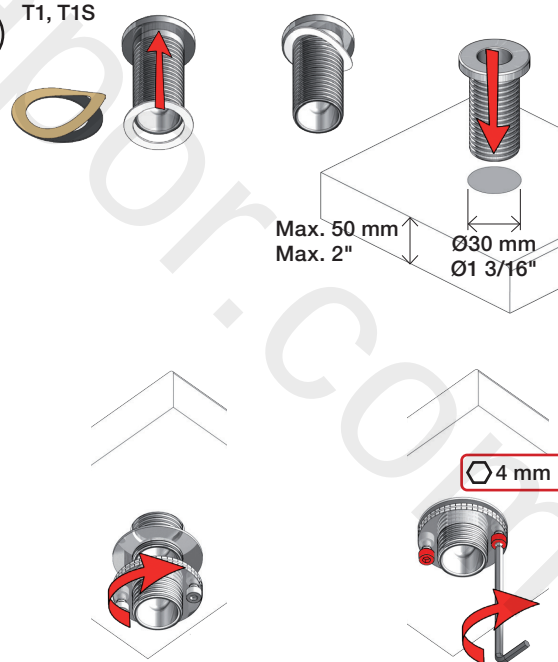


7A

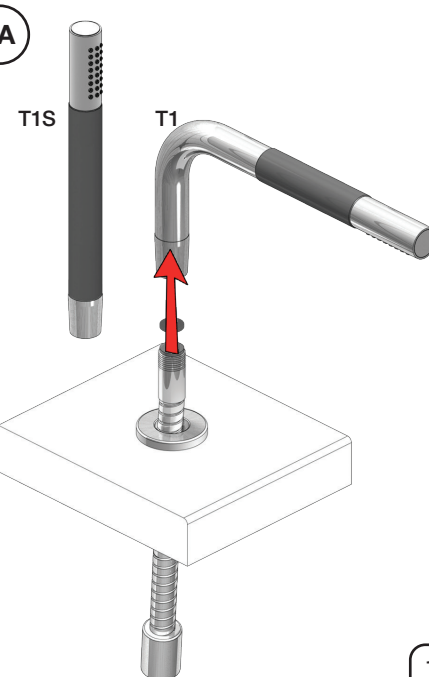


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

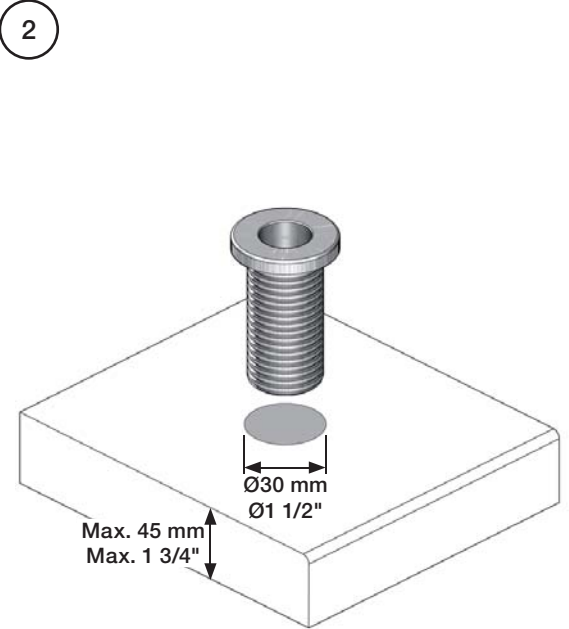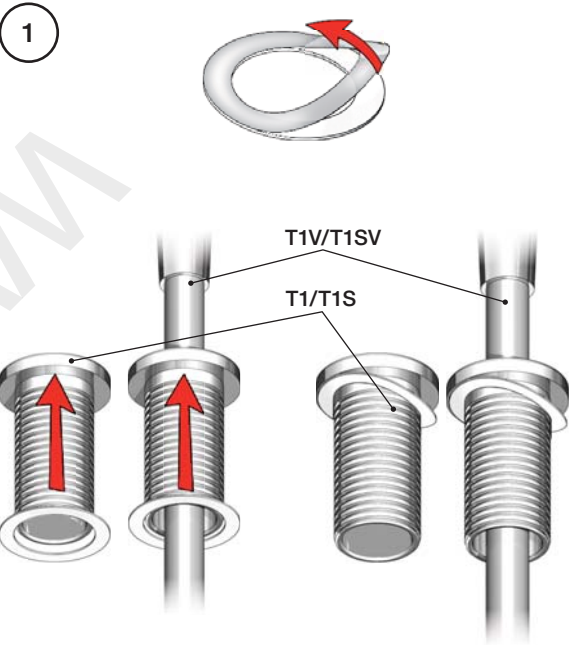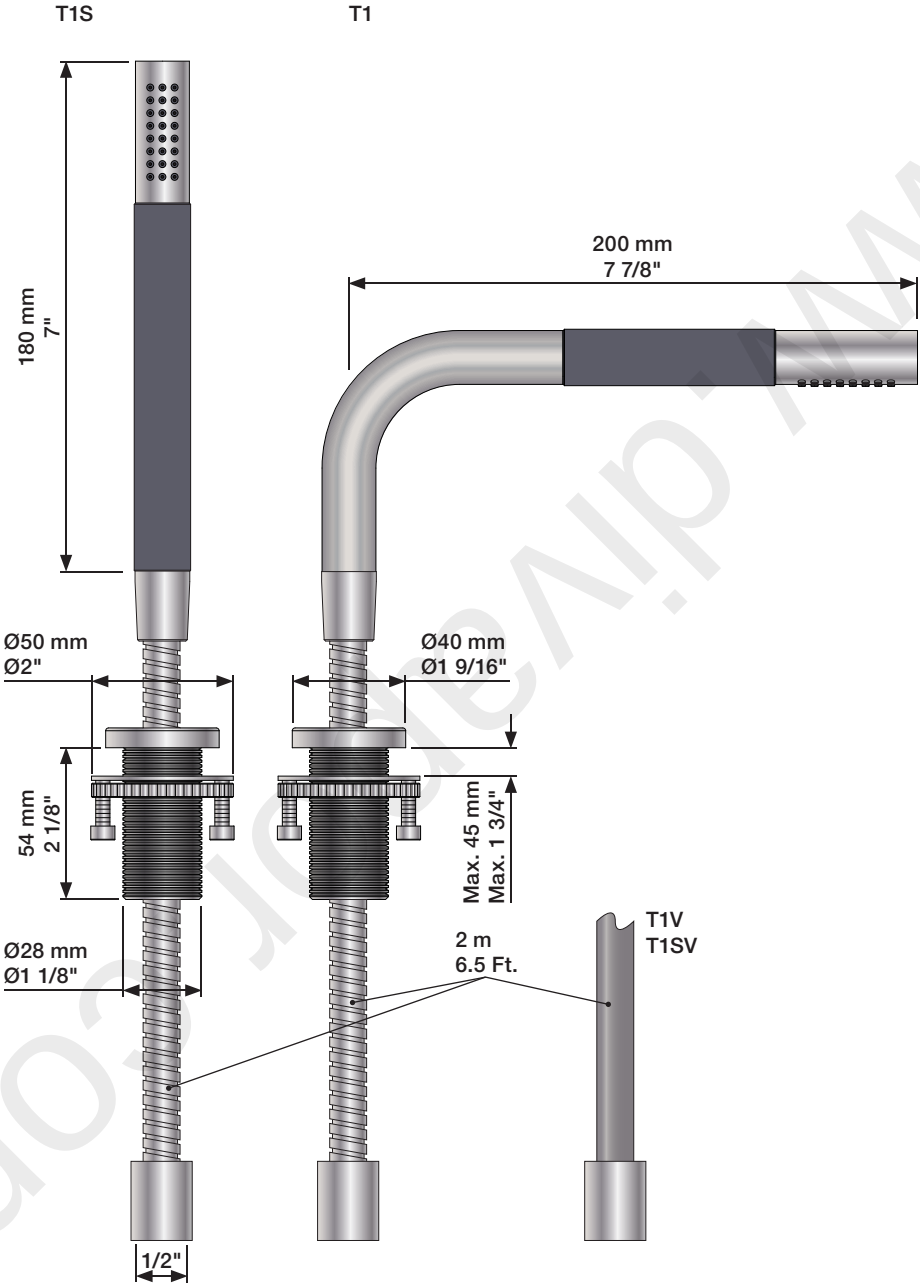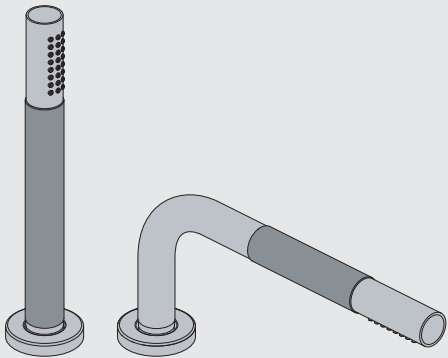


3

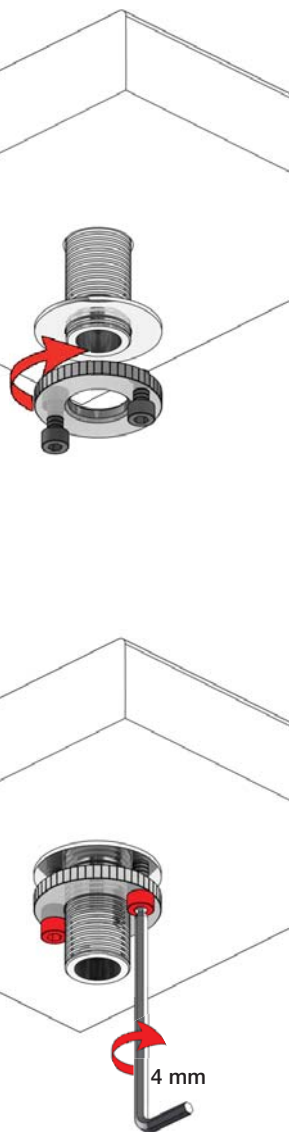


4

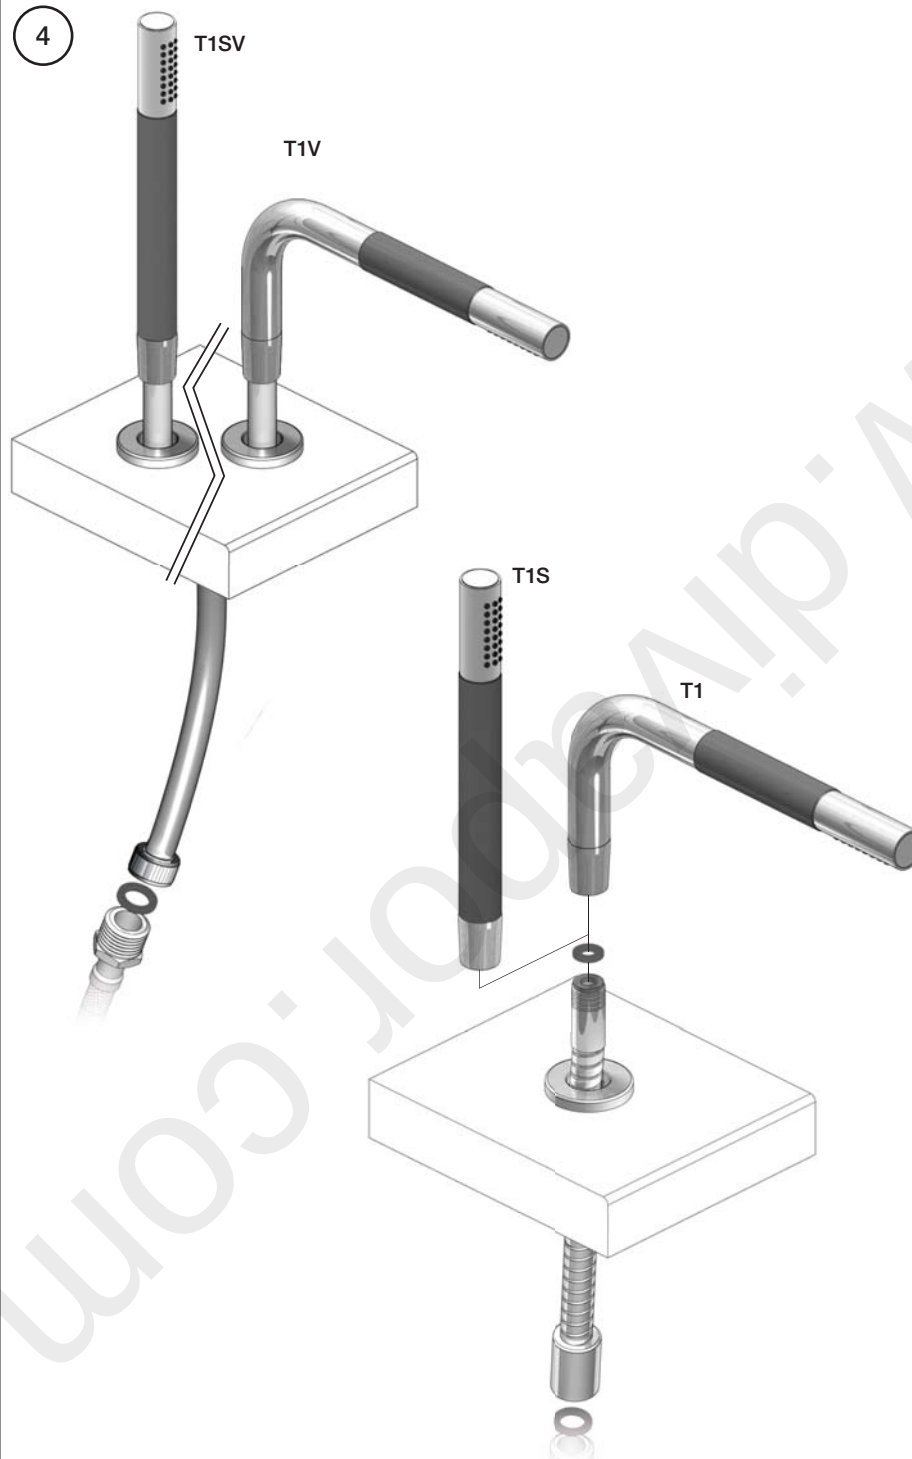


5

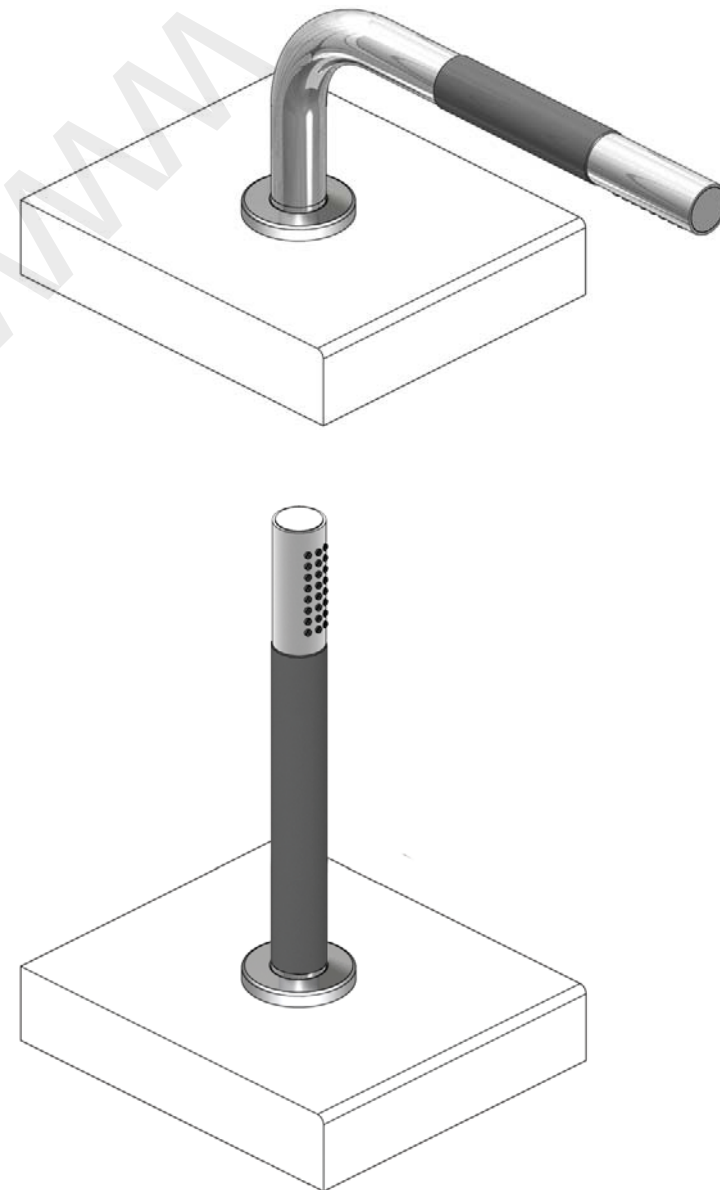

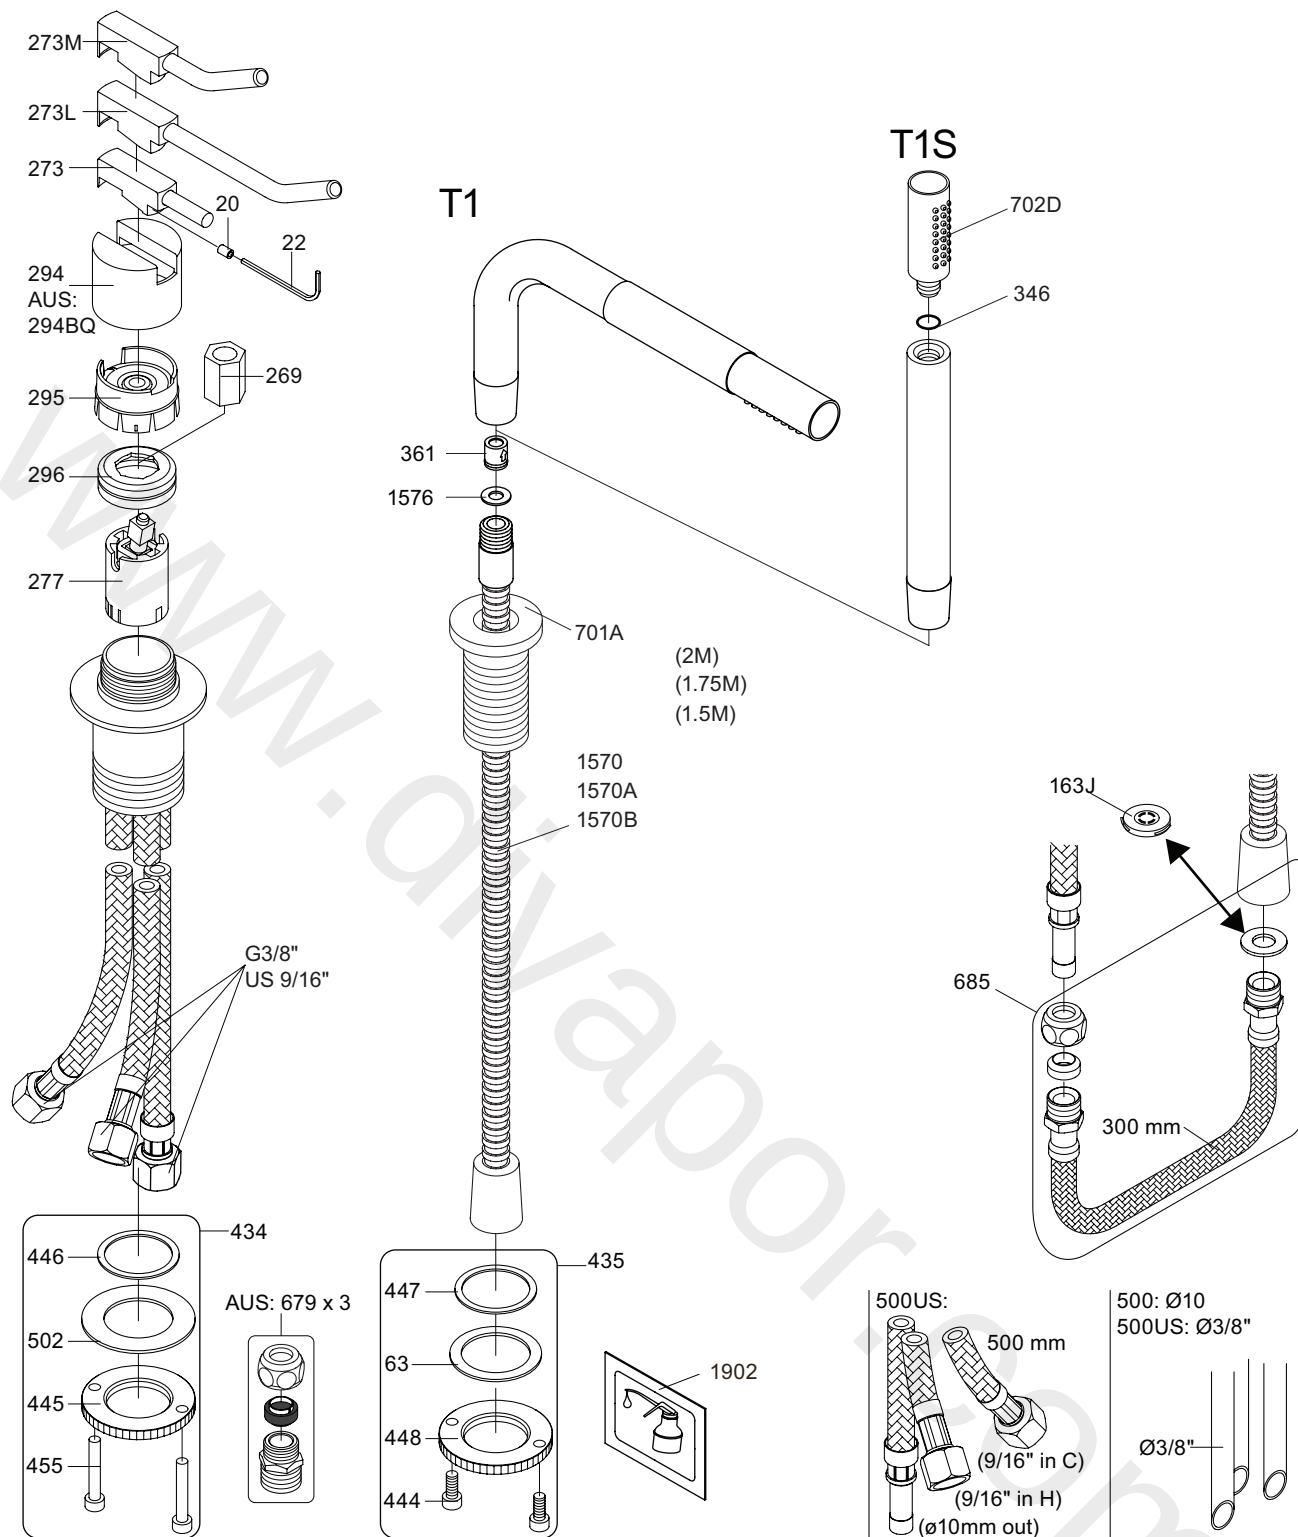

VR277K: VR22, VR269, VR277
 VR297: VR20, VR22, VR269, VR273, VR277, VR294, VR295, VR296
 VR434: VR445, VR446, VR502, 2xVR455
 VR435: VR63, VR447, VR448, 2xVR455
 NR.10: VR20, VR22, VR273, VR294, VR295



vola

Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 500T1 **500T1S, SC9m SC9S**

Date
 jan. 23

Rev.
3

Sheet
SB 27.67


Exploded view diagram of a water tap assembly. The diagram shows the following components and their labels:

- 273**: Top handle/lever assembly.
- 20**: Small pin or screw.
- 273L**: Left side handle/lever assembly.
- 273M**: Right side handle/lever assembly.
- 22**: Long curved pin or screw.
- 294**: Main body of the tap handle.
- Q: 294BQ**: Specific model identifier for the handle body.
- 295**: Ring component below the handle body.
- 269**: Small hexagonal nut or washer.
- 296**: Ring component below the main body.
- 277**: Lower body of the tap handle.
- G3/8" US 9/16"**: Thread specification for the lower body.
- 434**: Bracket for the cartridge assembly.
- 446**: O-ring or seal.
- 502**: Cartridge body.
- 445**: Flange or base for the cartridge.
- 455**: Small pin or screw.
- AUS: 679 x 3**: Specification for the cartridge assembly.
- 1902**: Final assembly or mounting plate.

Technical drawing of a vertical rod. A dimension line indicates a diameter of $\varnothing 3/8"$.

VR277K:	VR22, VR269, VR277
VR297:	VR20, VR22, VR269, VR273, VR277, VR294, VR295, VR296
VR434:	2xVR444, VR445, 2xVR455, VR502
NR.10:	VR20, VR22, VR273, VR294, VR295



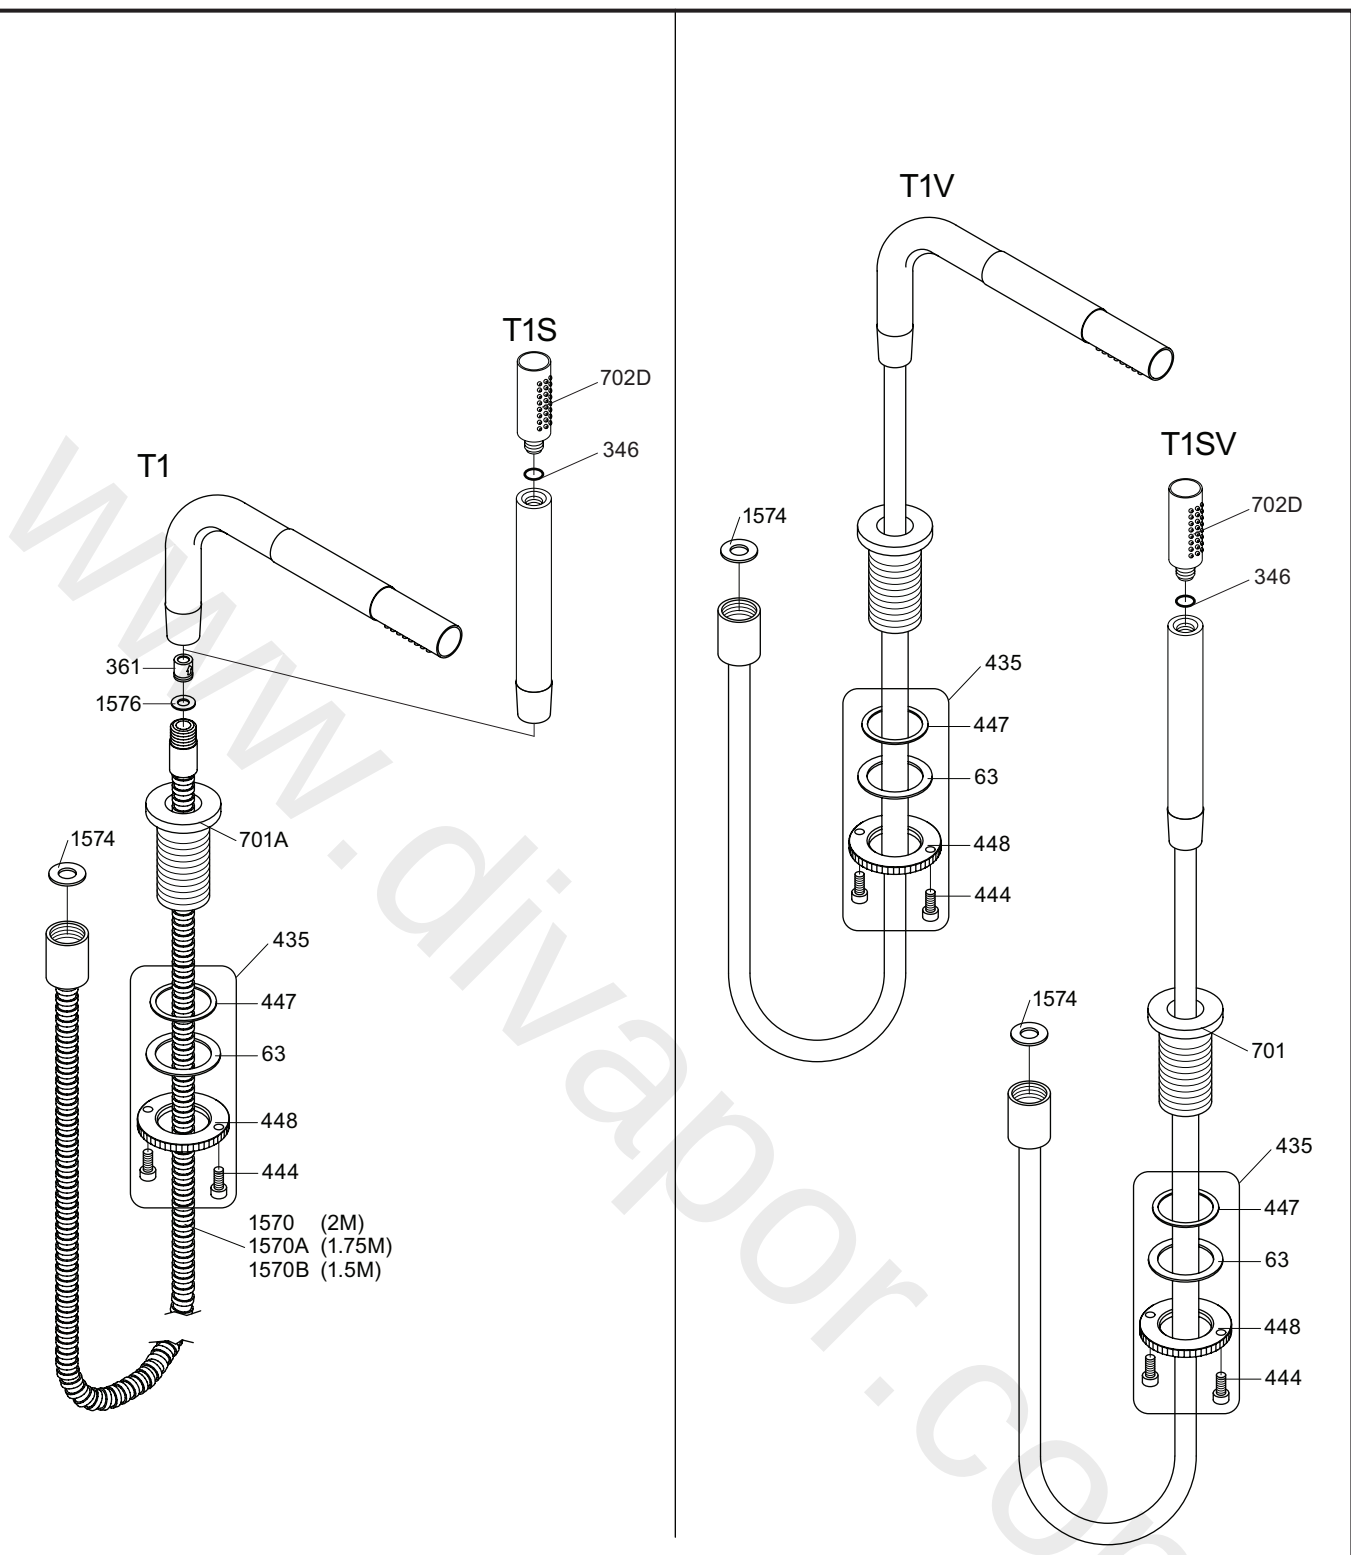

VR435: VR63, 2xVR444, VR447, VR448



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
Fax: + 45 7023 5511
sales@vola.com
www.vola.com

VOLA T1, T1S T1V, T1SV

Date
Jun. 17

Rev.
6

Sheet
SB 39