




voilà

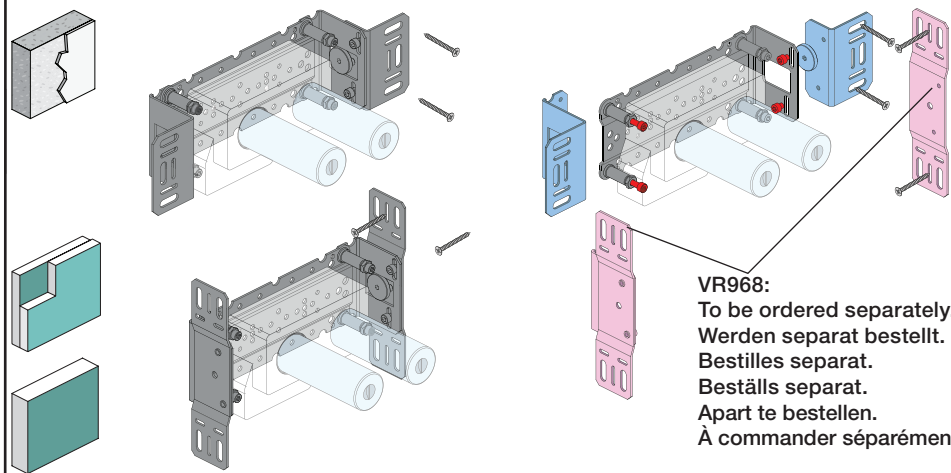

5 705230 287317

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
Max. 65°C, 150°F

5100/5200V/5300:

5400/5600A3:

5400/5600: 

5400/5600A4:

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.


 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	-	-	-	-
-	Out 3	Out 3	-	-	-	16/(4.2)	32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-		-		32/(8.5)

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazittlen lokale regelgeving.
Vérifiez la législation locale.



**!DO NOT!
!REMOVE!**




  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten







Box till inbyggnadsblandare.
 Boks til indbyggningsblander.
 Laatikko seinäaseiteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

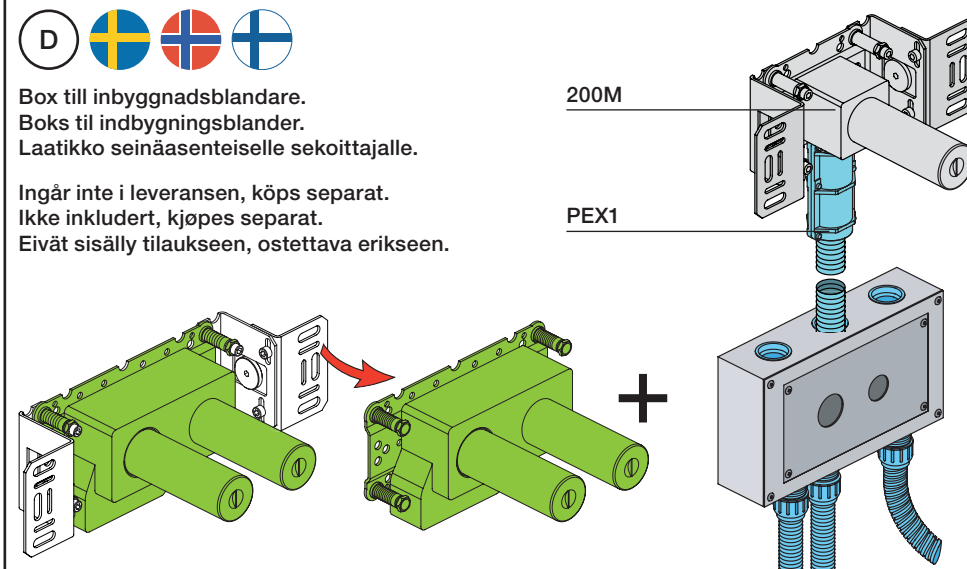


Y Min. 48 mm
Max. 110 mm

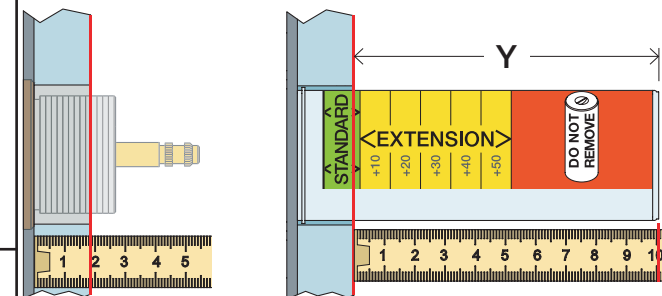



	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Montering af forlængerdele
Montering av förlängning

VR5250

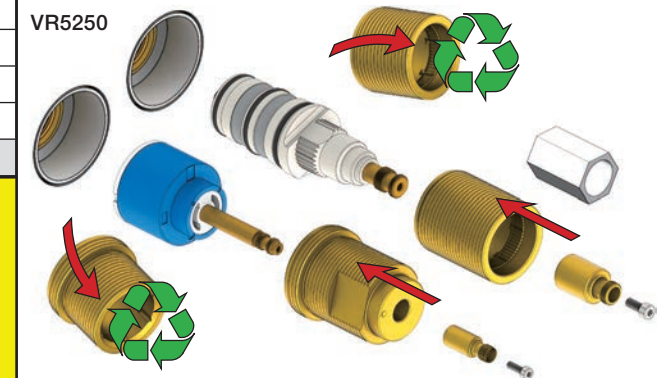


VR5410

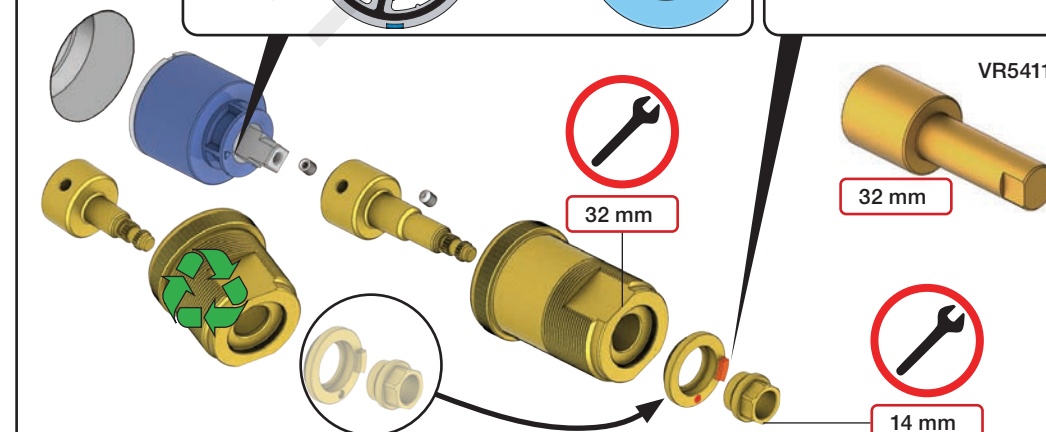
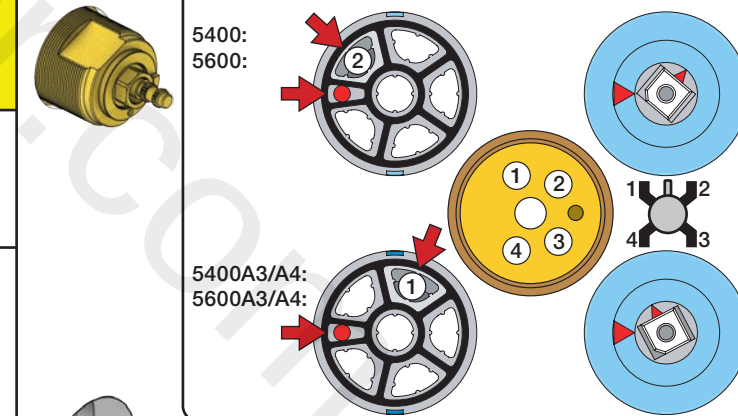


X_{52 - 0 mm}

X_{-15 - 0 mm}

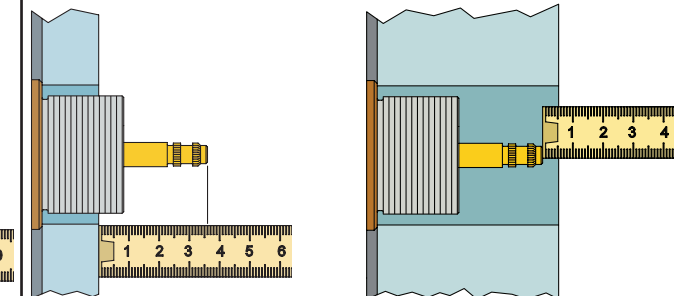


	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

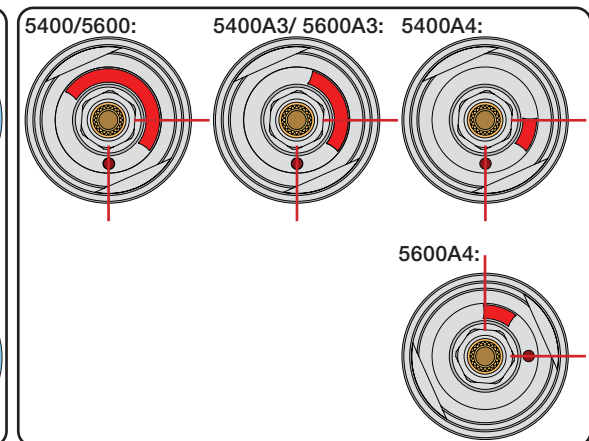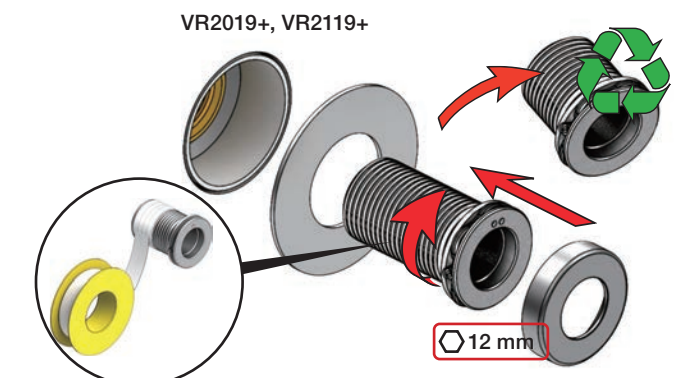[illegible]

VR5411


32 mm

14 m

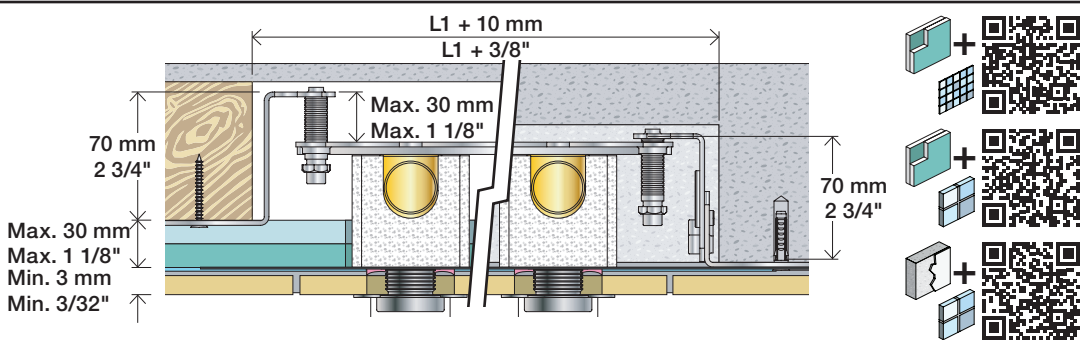

2x13 mm Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

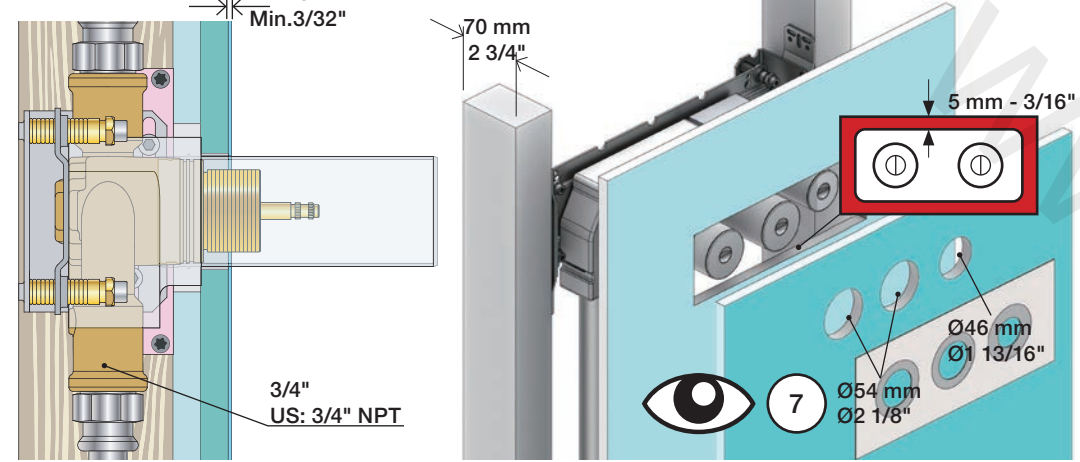

1x15 mm
1x18 mm
1x20 mm


Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

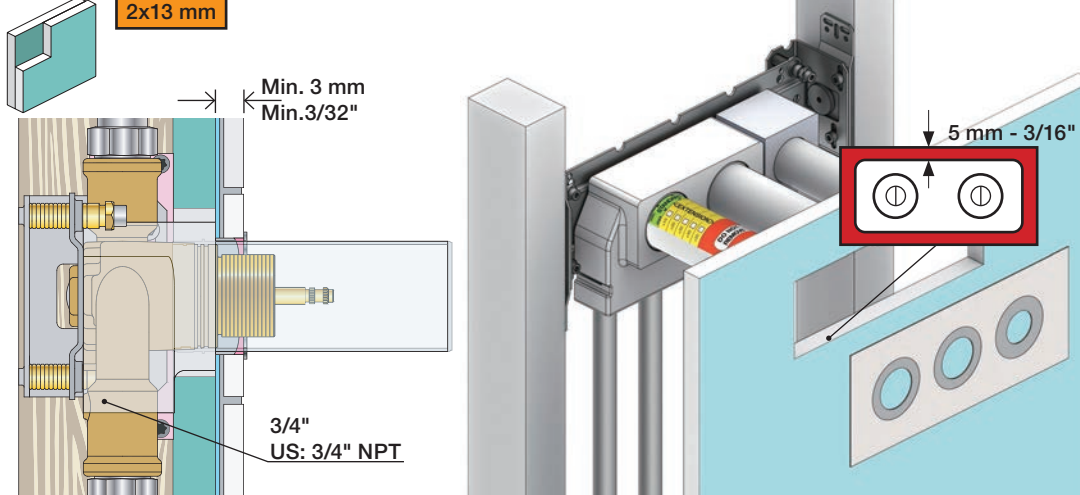

Masonry
Mauerwerk
Murværk








Murverk
Massieve wand
Mur Plein

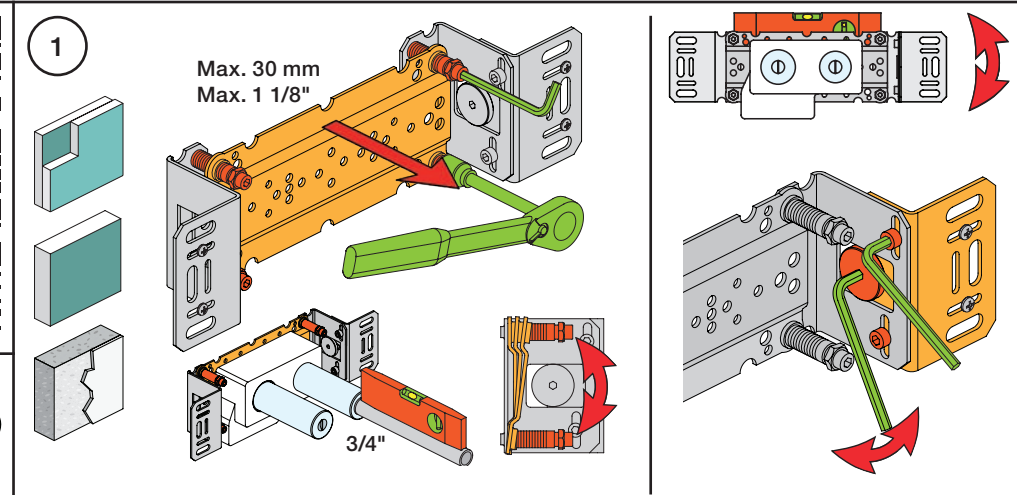


2 Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.


! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

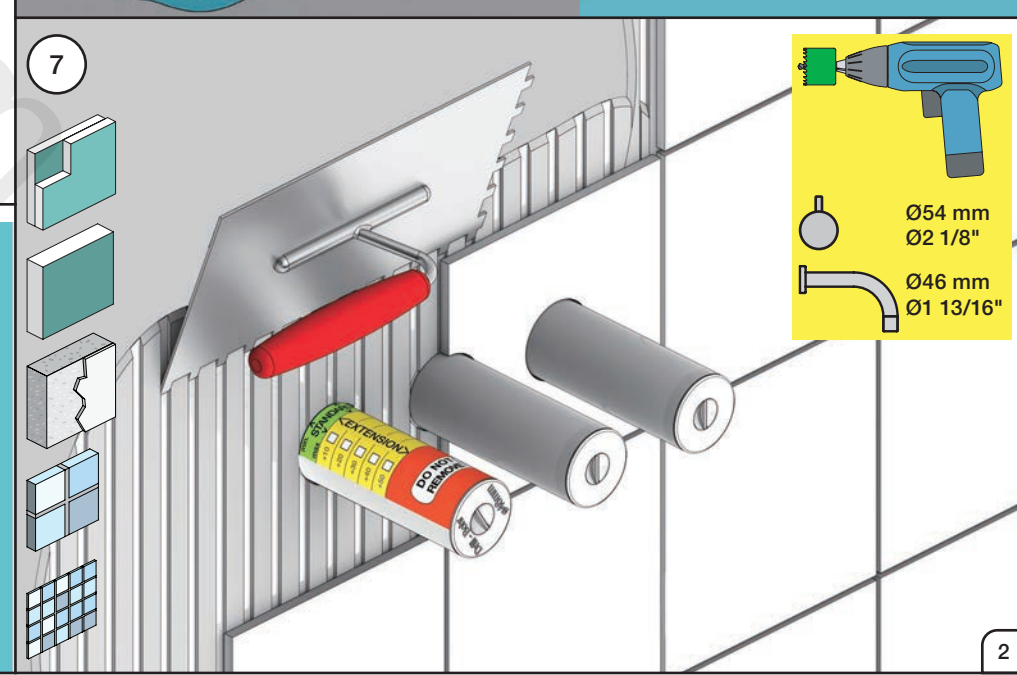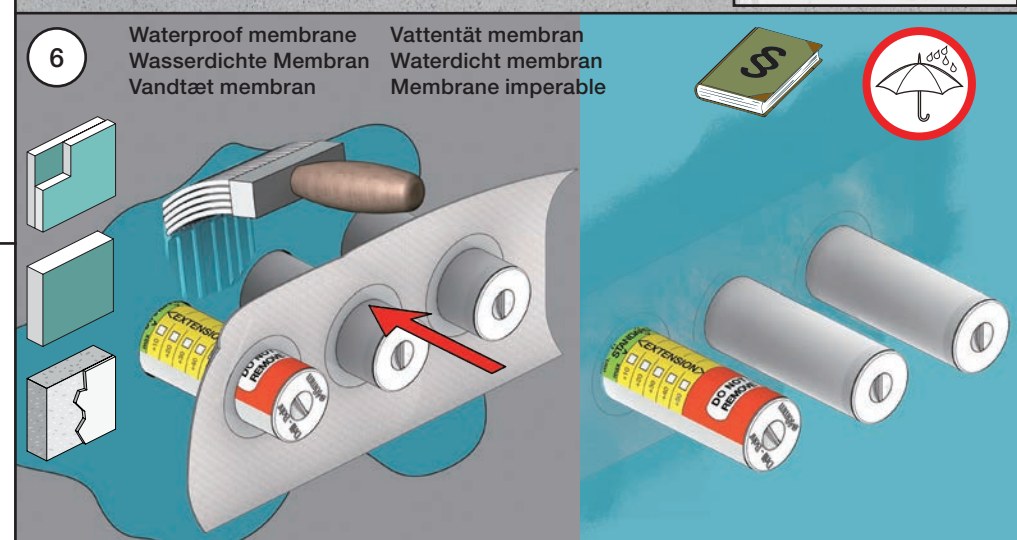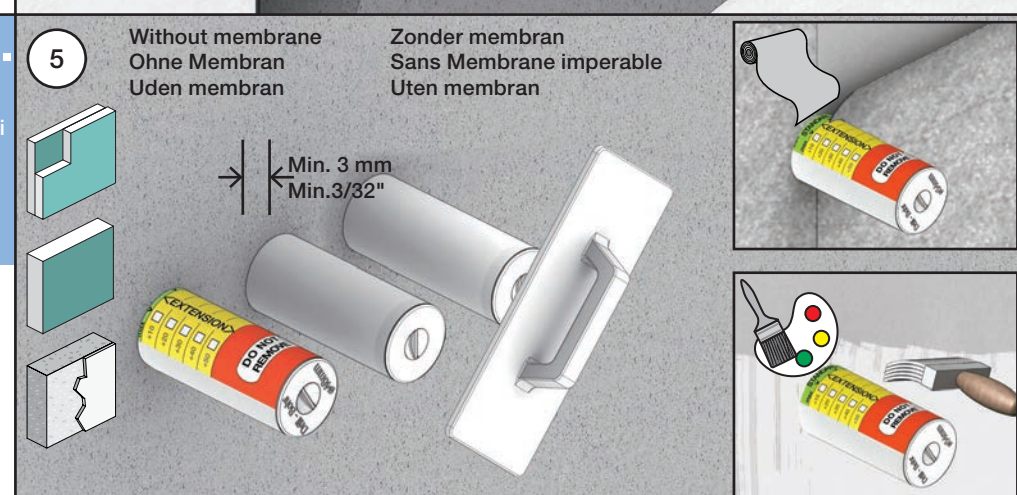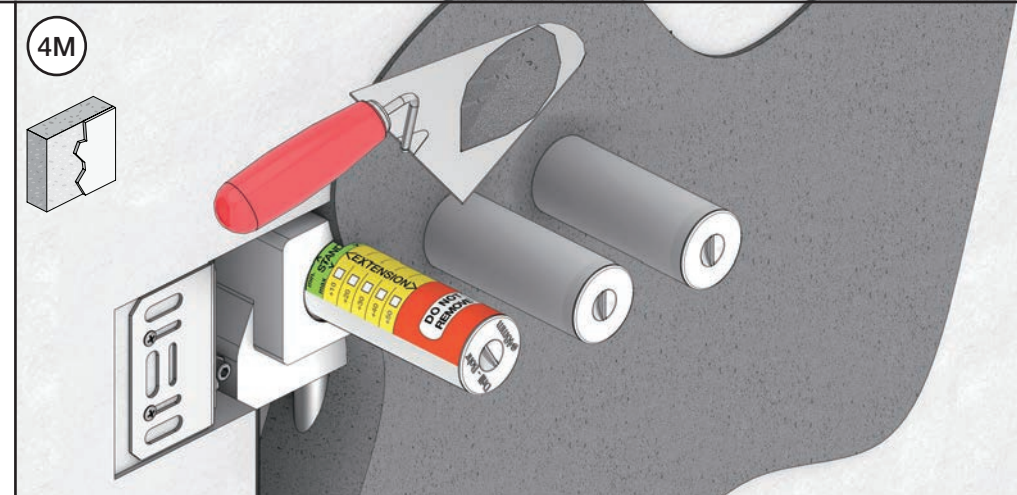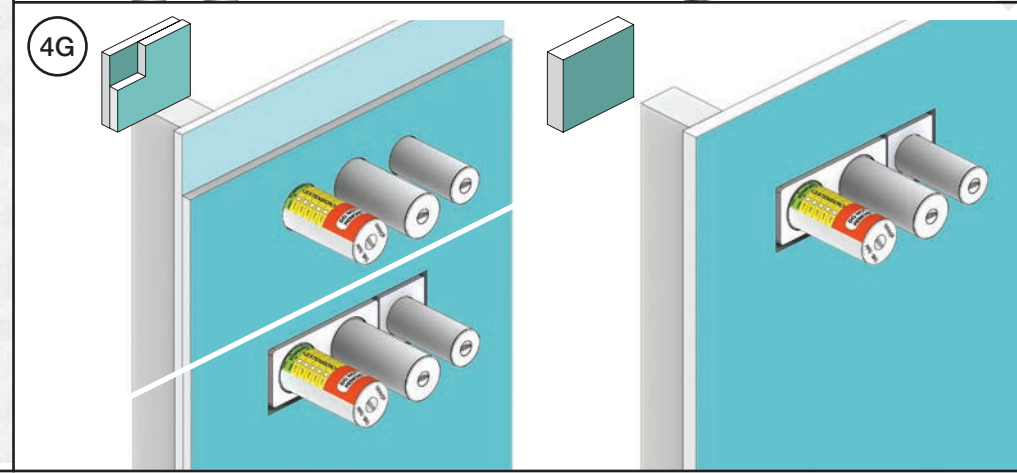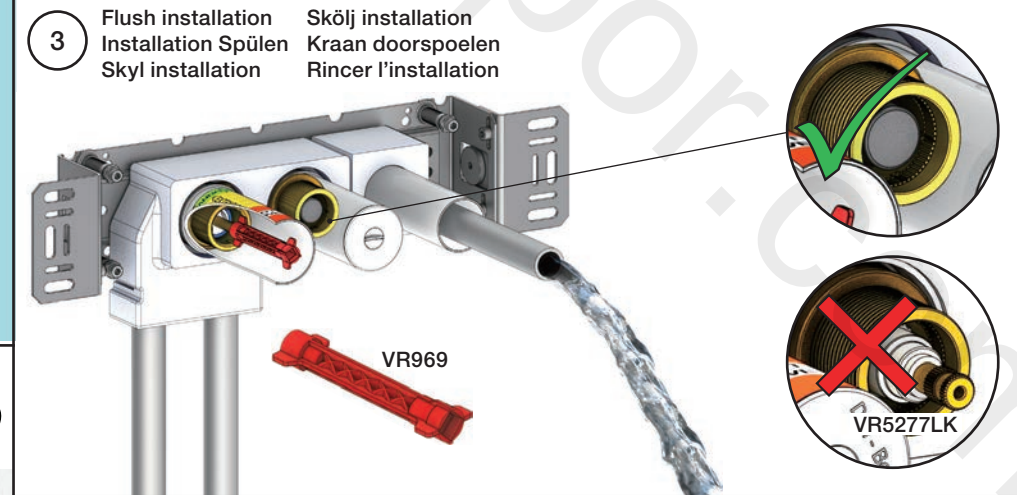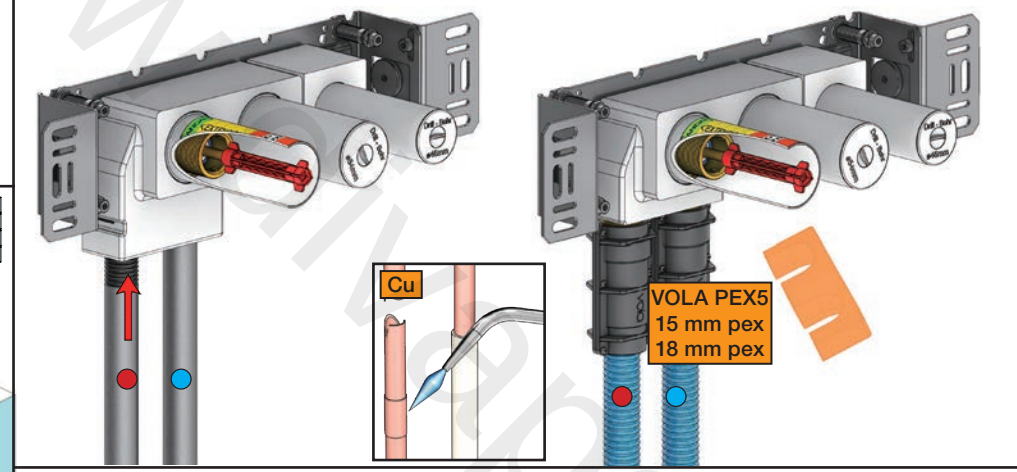

5100

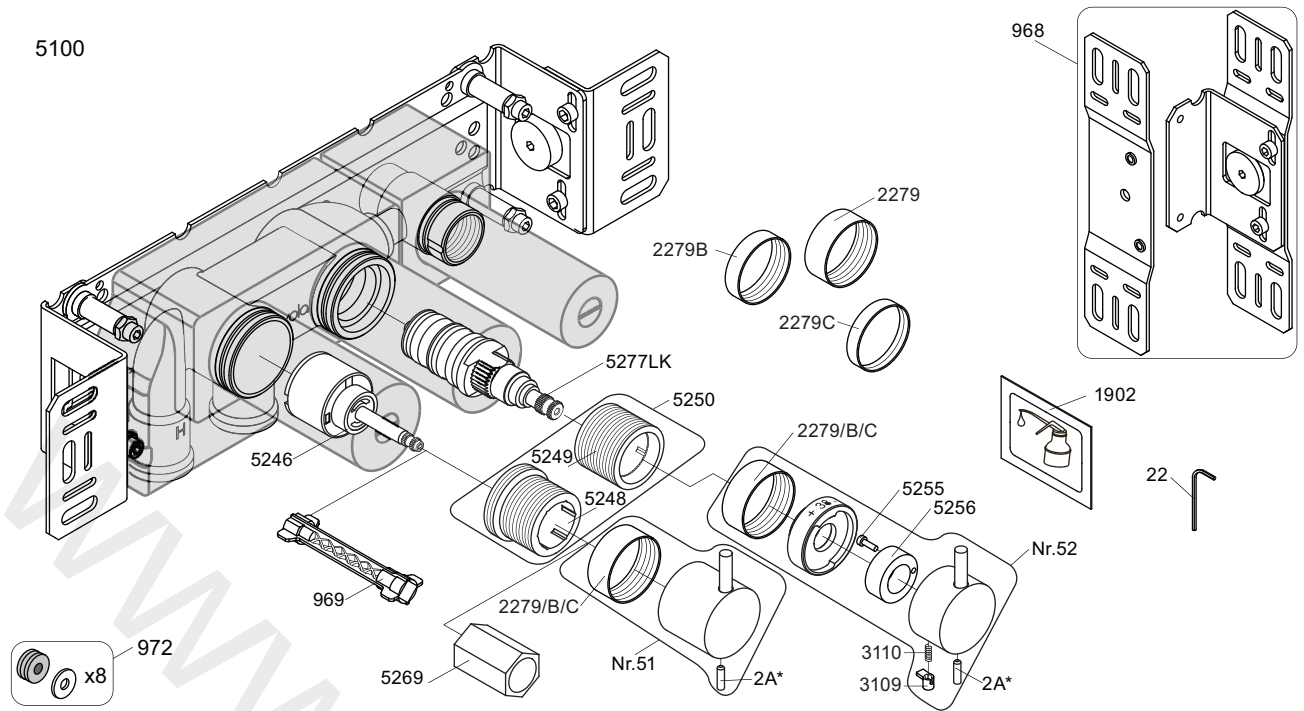



5250+



2A*  Color
VR2A-Steel: Standard
VR2A-F60: F17-F27-F60
VR2A-F63: F63-F64
VR2A-F65: F19-F65-F70

NR51: VR5251, VR2279+B+C, VR2A
NR52: VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
VR3113: VR3109, VR3110, VR5255
VR5250+: VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+: VR5257+, VR5259+
VR5258+: VR5258+, VR5260+

5100/5100X/5300

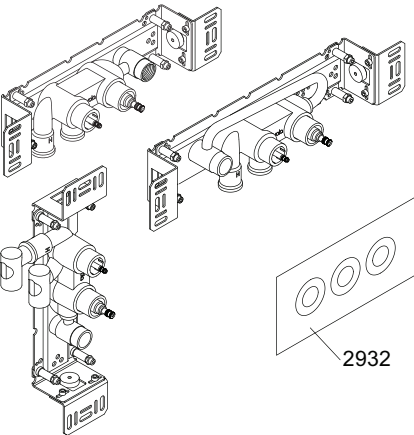


5003K



2x2001, 001

5200V

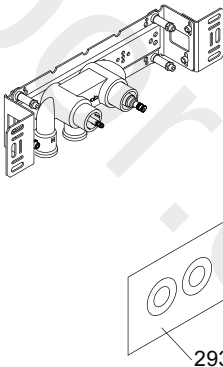

5002



2x2001



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5100
5100X, 5200V, 5300

Date
May 22

Rev.
5

Sheet
SB 10.51