




voilà

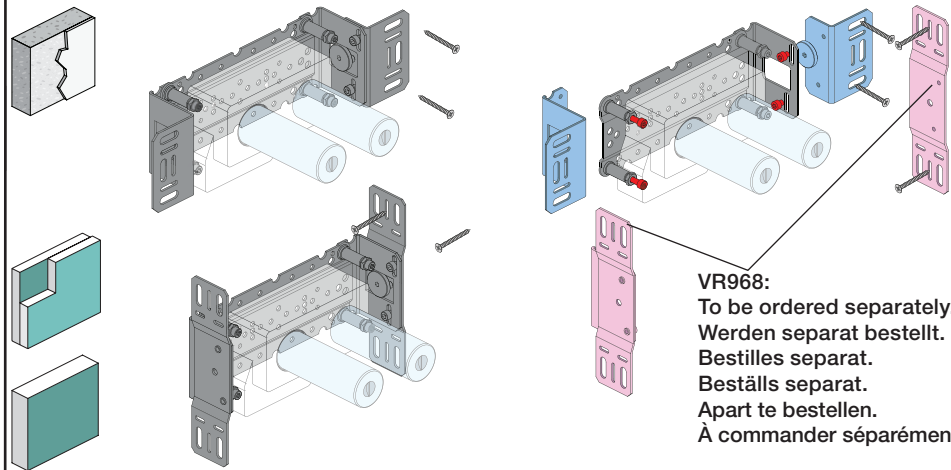

5 705230 287317

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
Max. 65°C, 150°F

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

5100/5200V/5300:  5400/5600A3:  - 


5400/5600:  -  5400/5600A4:  - 

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	-	-	-	-
-	Out 3	Out 3	-	-	-	16/(4.2)	32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-		-		32/(8.5)

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.



**!DO NOT!
!REMOVE!**




  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten








Box till inbyggnadsblandare.
 Boks til indbyggningsblander.
 Laatikko seinäaseiteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

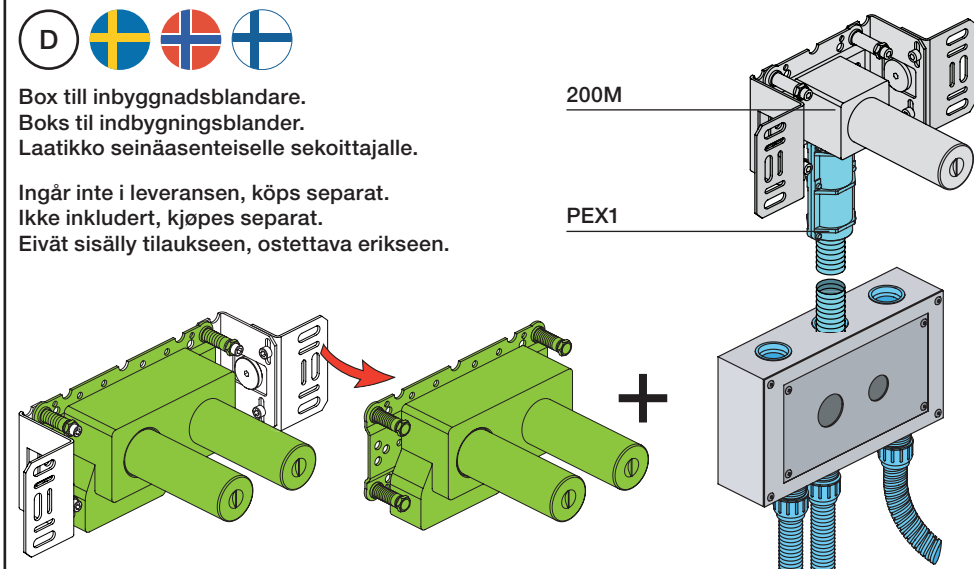




Y Min. 48 mm
Max. 110 mm

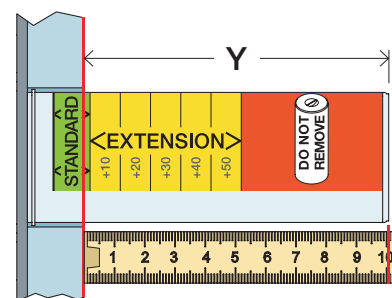

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50



Montering af forlængerdele
Montering av förlängning

VR2019+. VR2119+

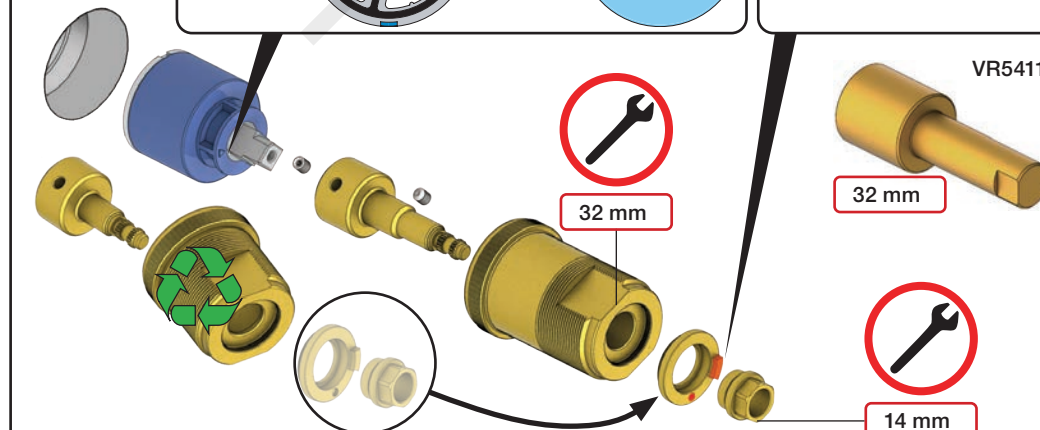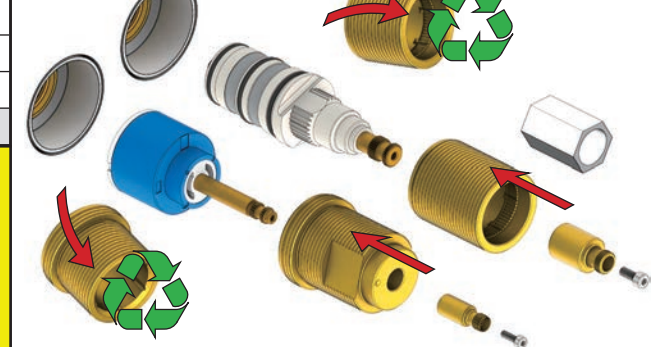


X_{52 - 0 mm}

X_{-15 - 0 mm}



	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges

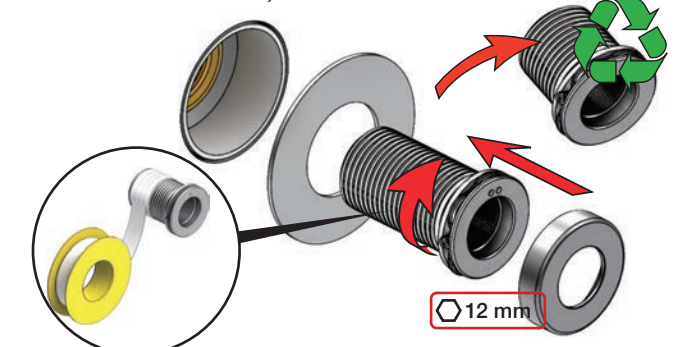

5400/5600: 5400A3/ 5600A3: 5400A4:





5600A4:



VR5411

32 mm

14 m

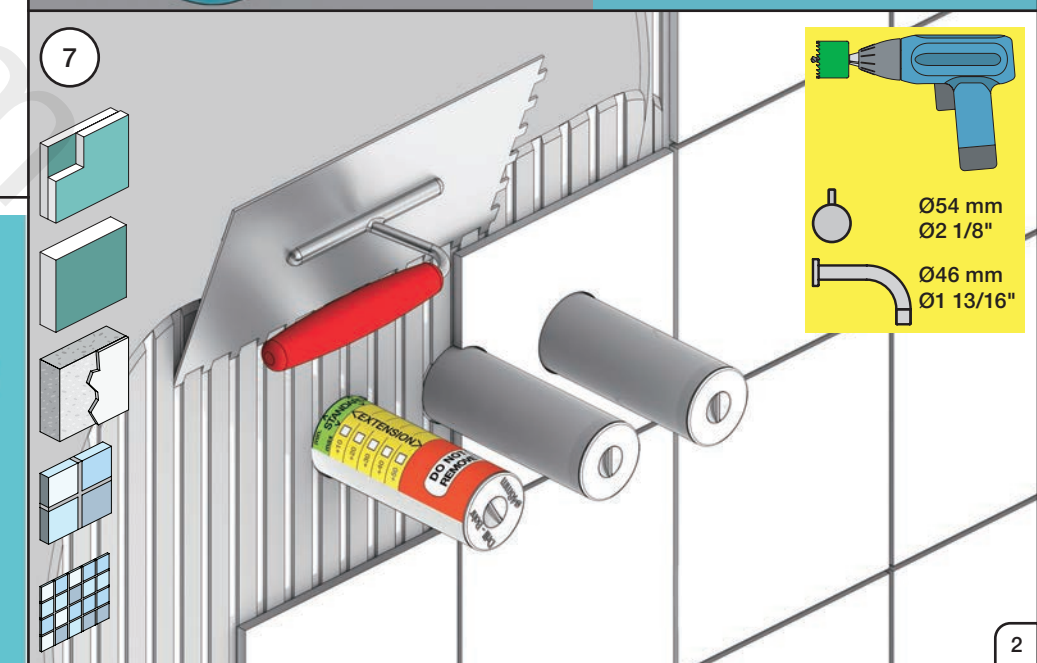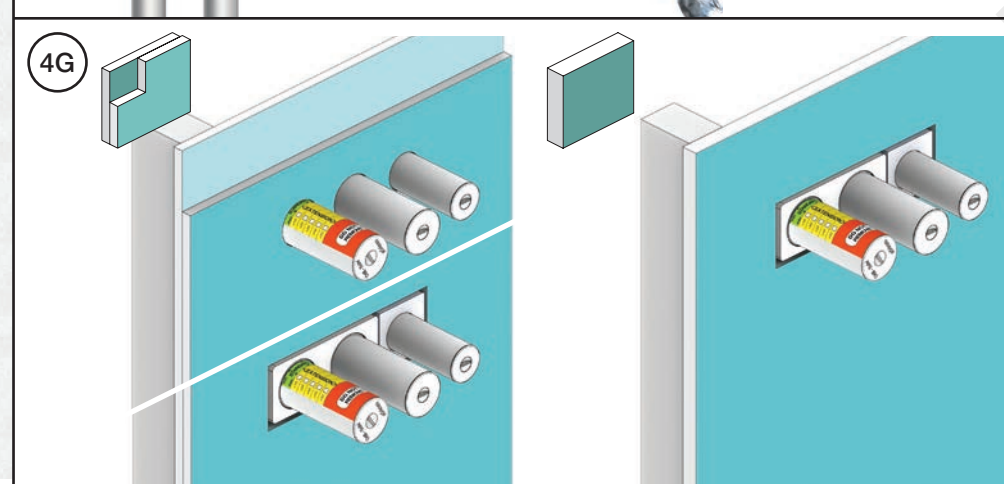


VOLA 010, 020, 030, 040
VOLA 010C, 020C, 040D

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage




010, 020


010C, 020C

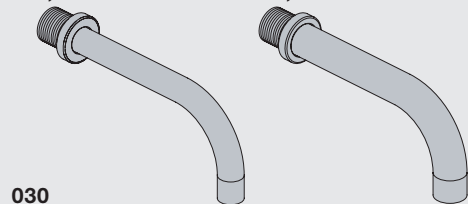


030

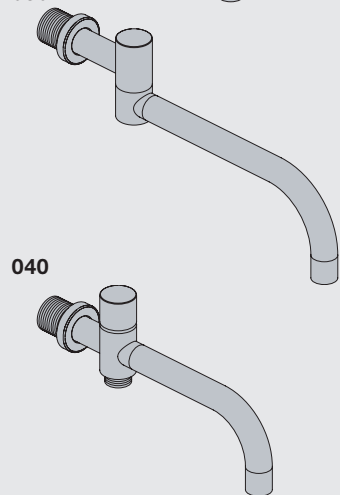

040

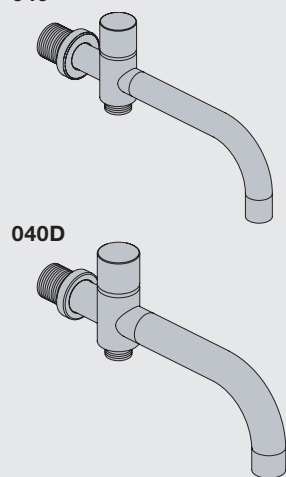

040D



www.vola.com

mnt_010_V1_40998360
 08-08-2022



5 705230 341750

Standard Flow data:		Max.
010/020	(l/min) (Gal/min)	5.0 1.3
010C/020C	(l/min) (Gal/min)	30 7.9
030	(l/min) (Gal/min)	9.0 2.0
040	(l/min) (Gal/min)	25 6.6
040D	(l/min) (Gal/min)	30 7.9
		Max. 65°C. Max. 150°F



VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min




For more water saving possibilities please see:
 Weitere Wassersparmöglichkeiten finden Sie auf:
 For flere vandbesparende muligheder se venligst:
 För mer vattenbesparande möjligheter hänvisas till:
 Voor meer waterbesparende mogelijkheden zie:
 Pour plus d'informations sur les options : économie d'eau, voir le site:


www.vola.com






010, 020

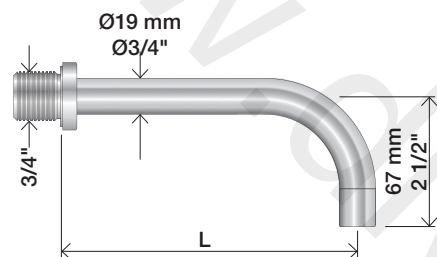


010C, 020C

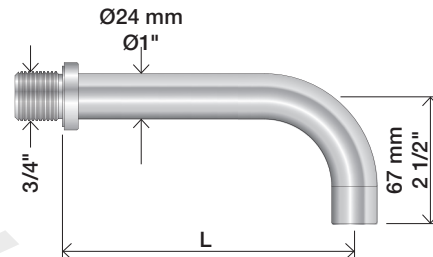



030

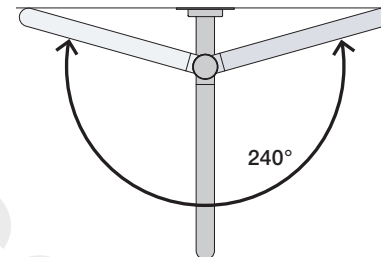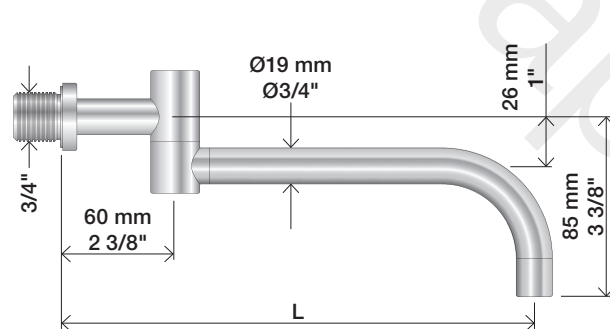

040

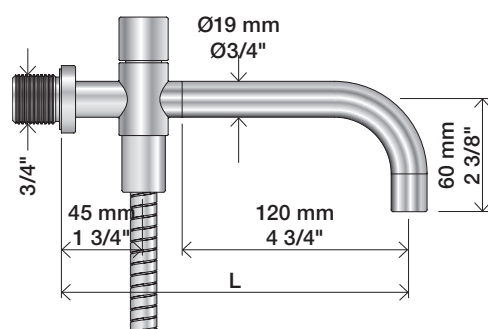

040D

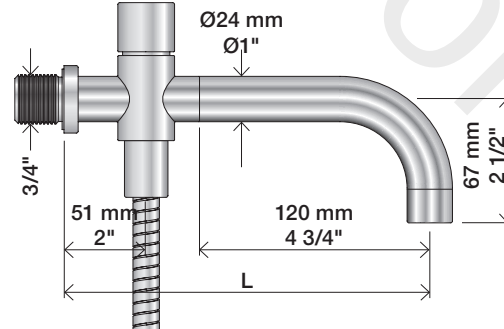


	L (mm)	L (Inch)
010(C)/100	100	4"
010(C)/130	130	5"
010(C)/160	160	6"
020(C)/200	200	7 3/4"
020(C)/225	225	8 3/4"
020(C)/260	260	10 1/4"
020(C)/300	300	11 3/4"

	L (mm)	L (Inch)
030/200	200	7 3/4"
030/250	250	9 3/4"
030/300	300	11 3/4"
030/350	350	13 3/4"

	L (mm)	L (Inch)
040	185	7 3/4"
040D	200	7 3/4"
040D/250	250	9 3/4"
040D/300	300	11 3/4"

1

010, 010C, 020, 020C, 030, 040, 040D

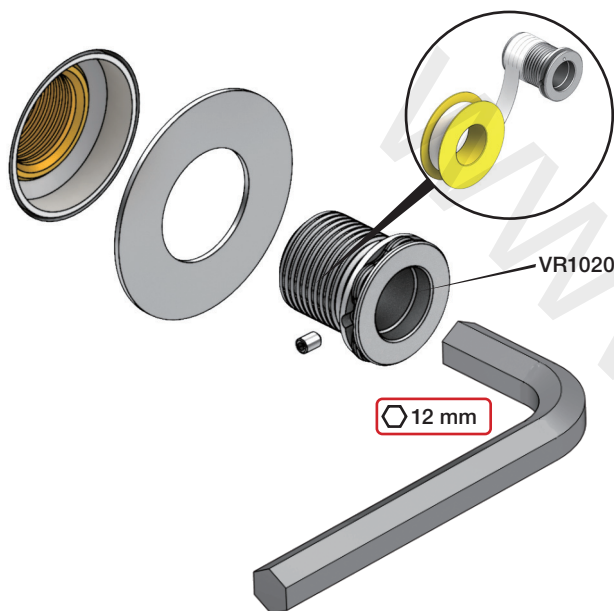

2






3

Ø19: 010, 020, 030, 040




Ø24: 010C, 020C, 040D

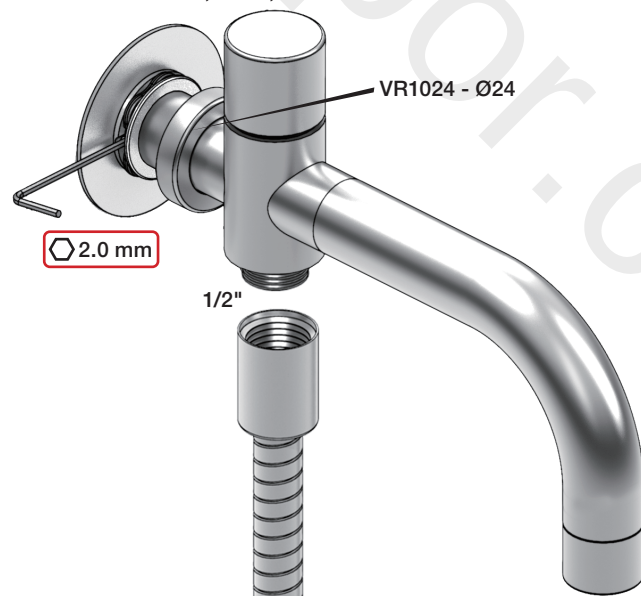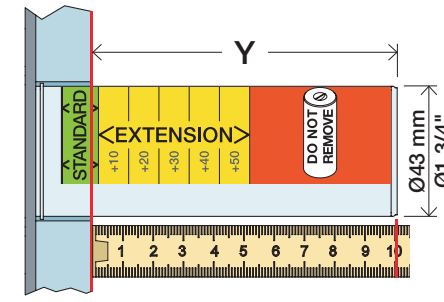Extension
VerlängerungForlængerdele
FörlängningVerlengstücken
ModificationT Min. 3 mm
Max. 65 mmY Min. 48 mm
Max. 110 mm

T	Y	VR2019 (Ø19) VR2119 (Ø24)
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+/VR2219+

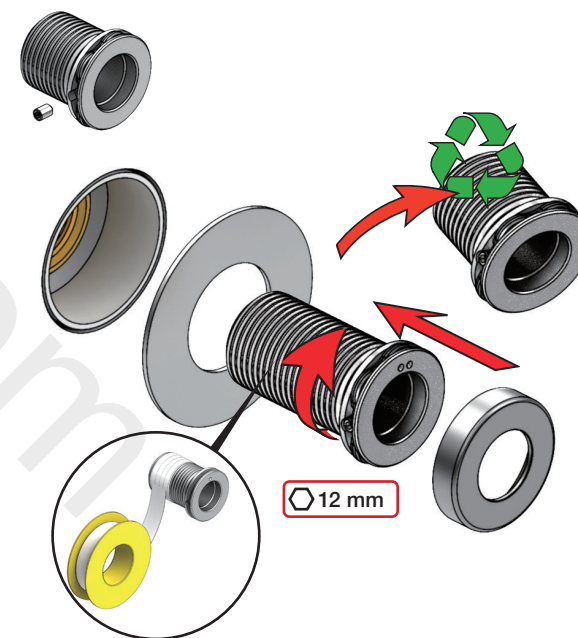



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

NR.51:


1

NR.52+64:


2

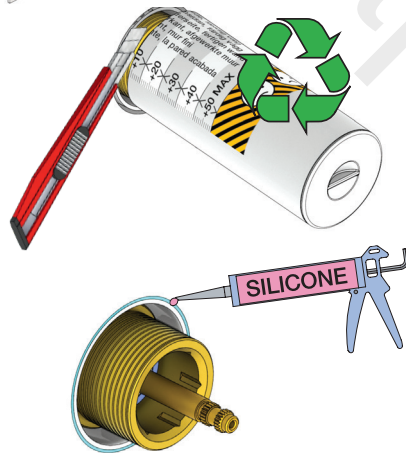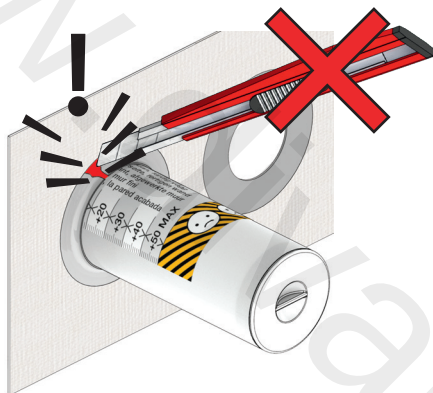

NR 51



NR 51 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 51 - 2

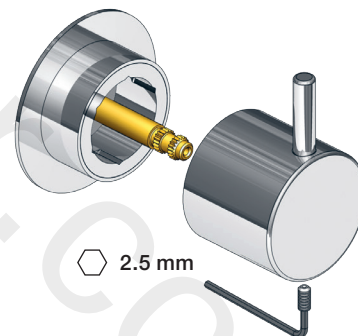


NR 52



NR 52 - 1

VR5278

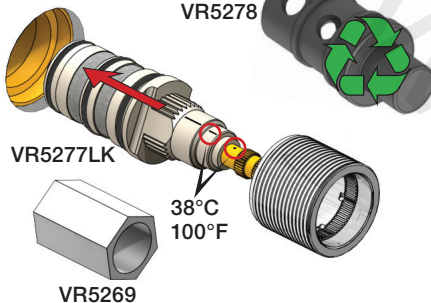

VR5277LK

38°C
100°F


VR5269

NR 52 - 2

VR2279


VR2279B

VR2279C



	A	
VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 64




NR 64 - 1

VR2279

VR2279B


VR2279C




	A	
VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 52 - 3

Anti scald settings
Verbrühschutz
Skoldningssikring
Skållnings skydd
Broeien verzekeringen
Prévention des brûlures

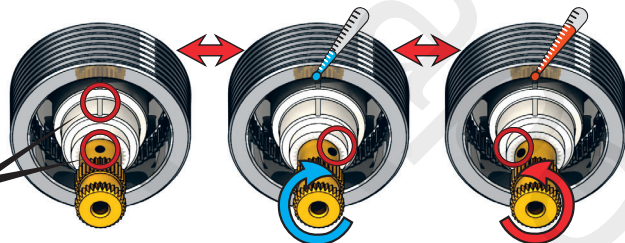38°C
100°F


NR 52 - 4

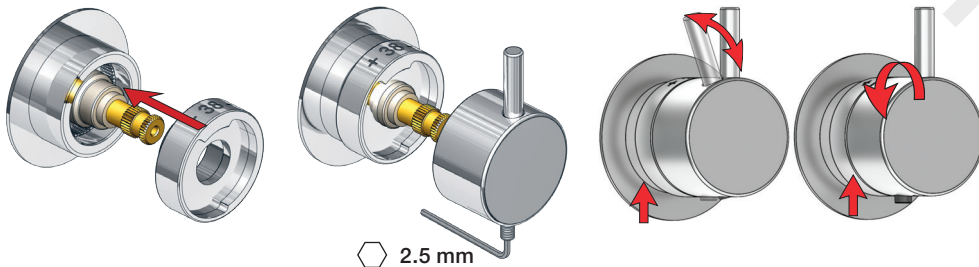

2.5 mm

NR 64 - 2

5400

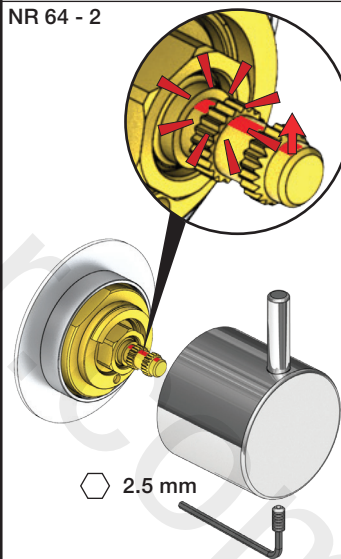

2.5 mm


5400VA3

5400VA4


VOLA T2




VOLA T2

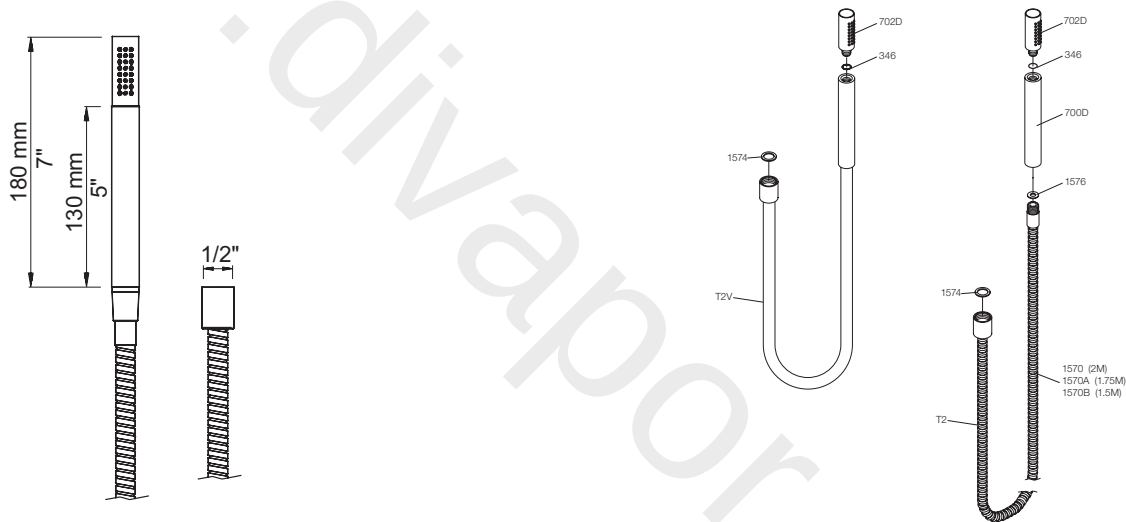


T4




T5




T6

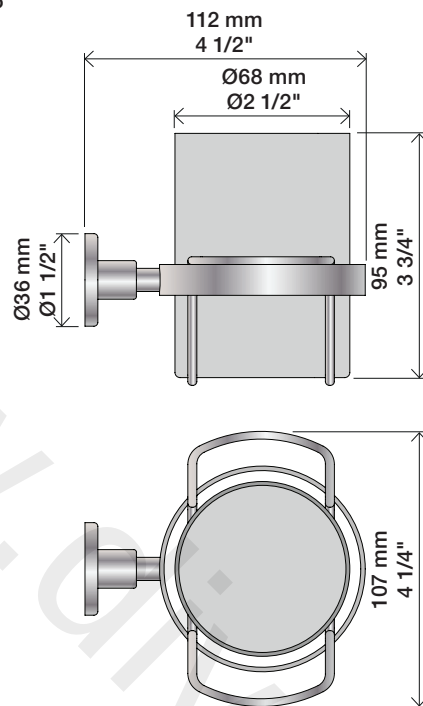


T7

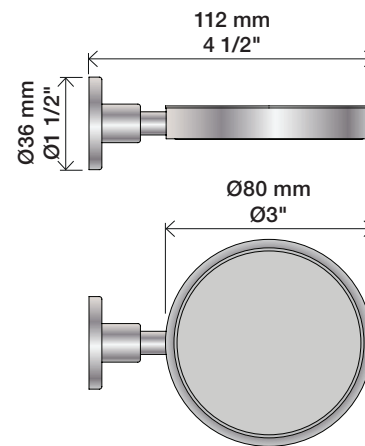


T11




T16

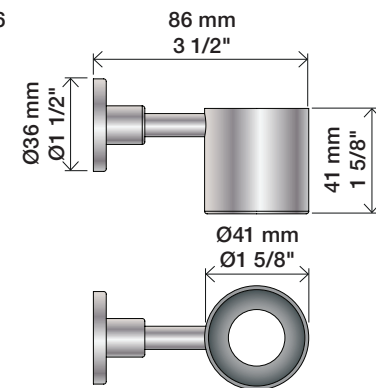


T14

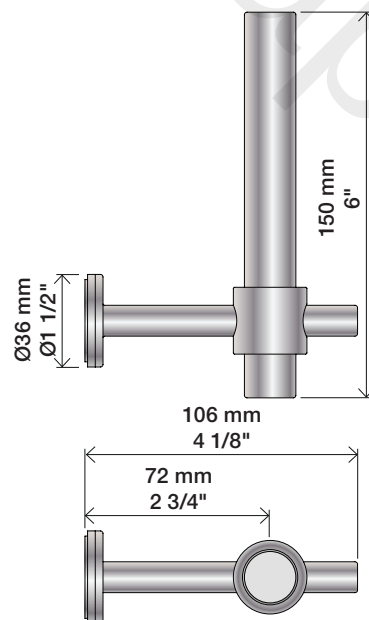


T8




T9




T3



T27



VOLA T3, T4, T5, T6, T7, T8, T9, T11, T14, T16, T27

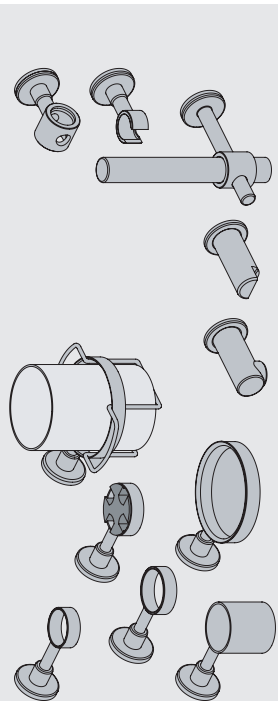


vola


www.vola.com

mnt_T3-T27_V3_40999247
01-04-2022


T4, T5, T6, T7, T11, T16, T27

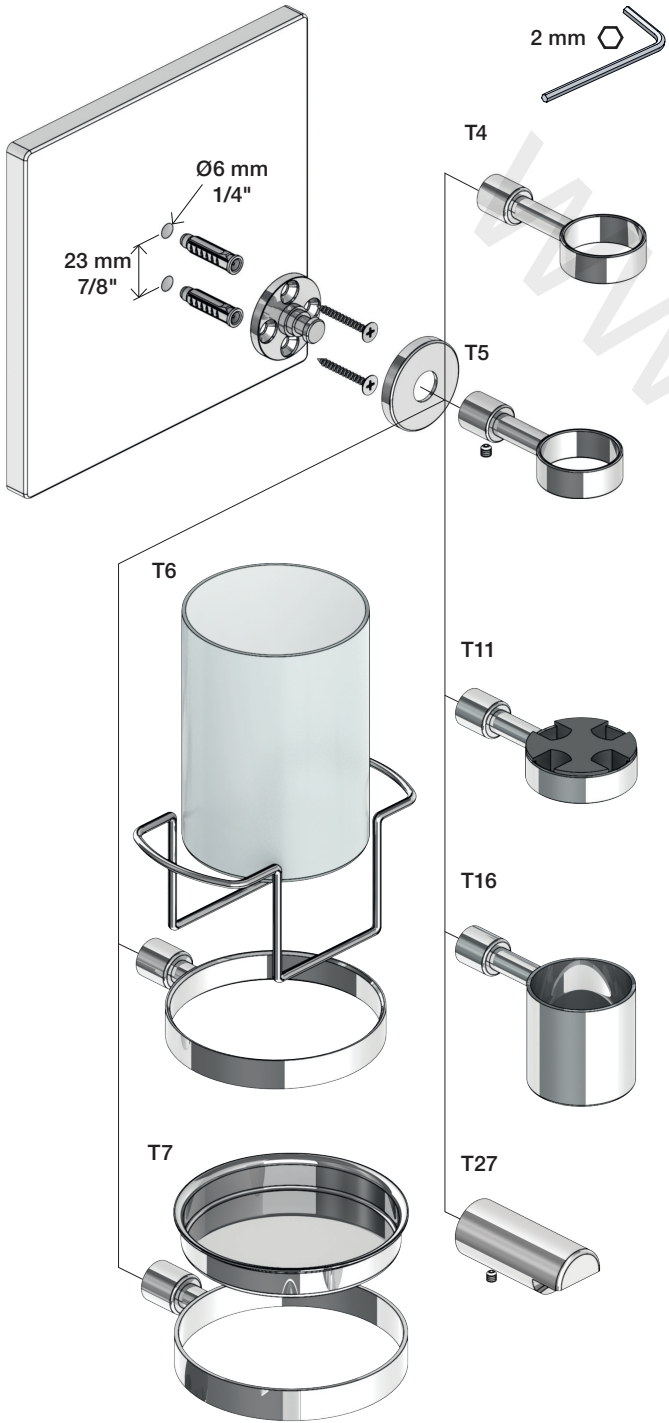


T8, T9, T14

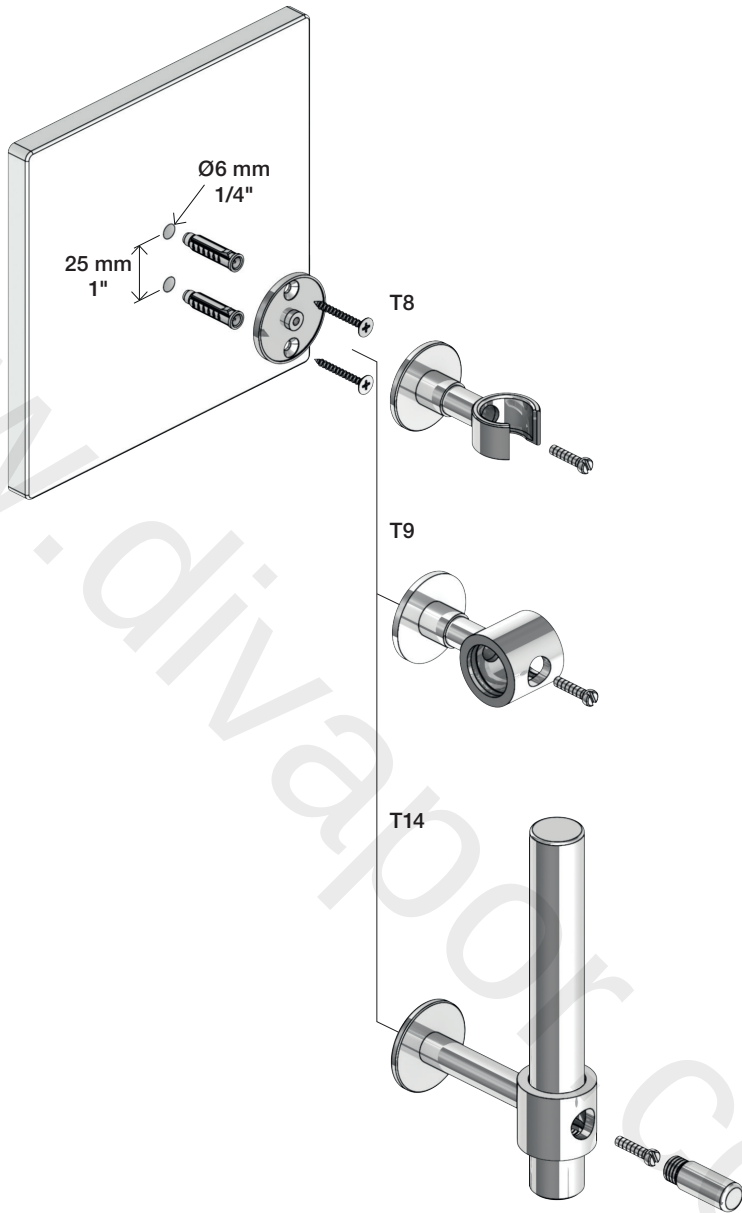

T3

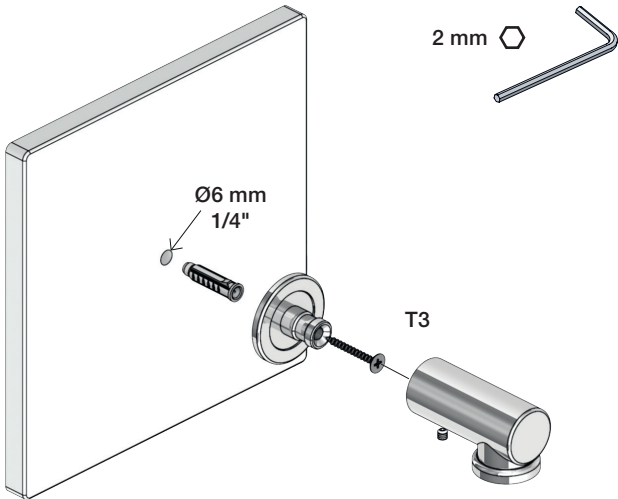



Date Apr, 21


Rev.

2


Sheet

SB 20.1

5100

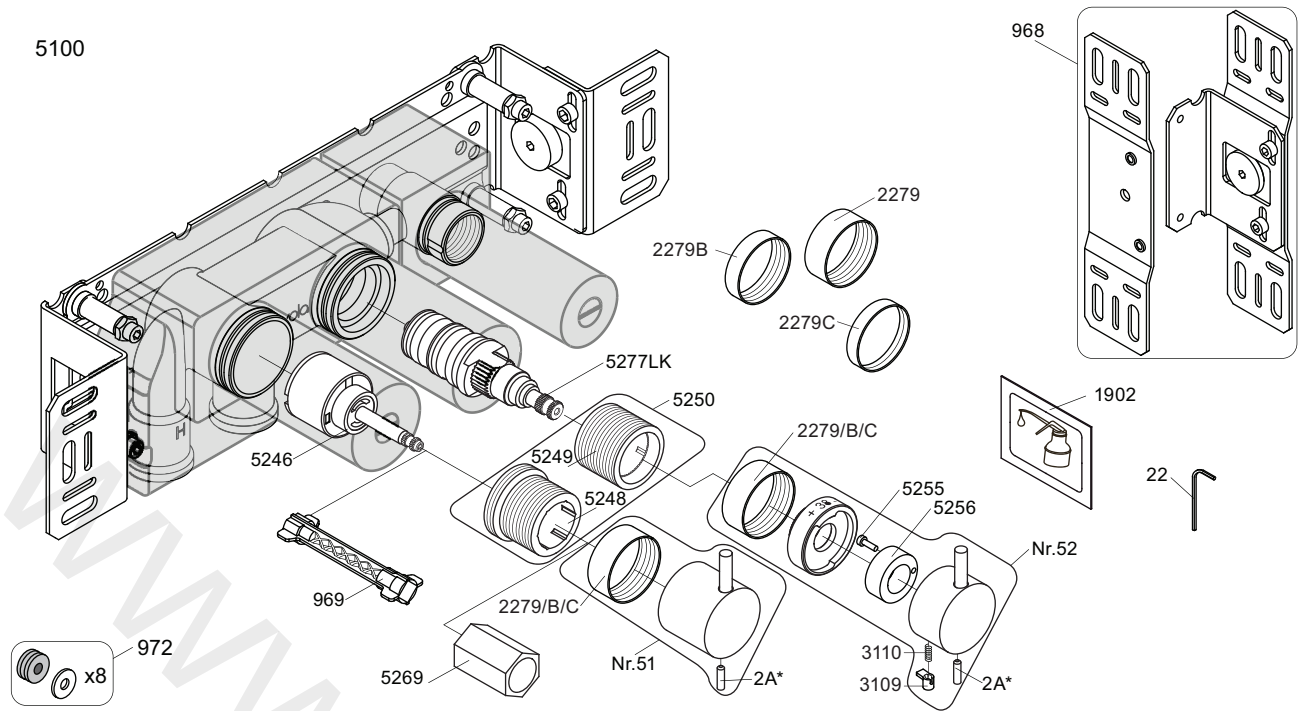

5250+




2A* Color


VR2A-Steel: Standard
VR2A-F60: F17-F27-F60
VR2A-F63: F63-F64
VR2A-F65: F19-F65-F70

NR51: VR5251, VR2279+B+C, VR2A
NR52: VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
VR3113: VR3109, VR3110, VR5255
VR5250+: VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+: VR5257+, VR5259+
VR5258+: VR5258+, VR5260+


5100/5100X/5300

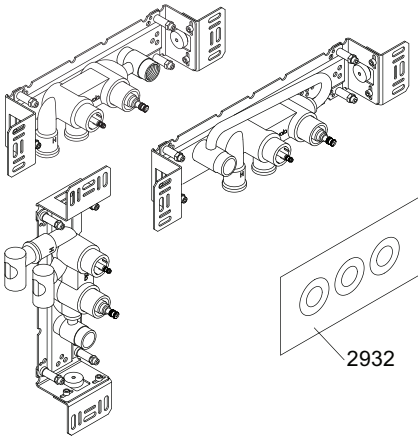

5200V

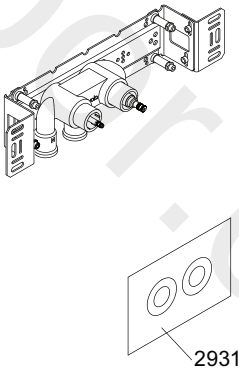

5003K




5002



2x2001, 001



2x2001



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com


VOLA 5100
5100X, 5200V, 5300

Date
May 22


Rev.
5

Sheet
SB 10.51

T2V:

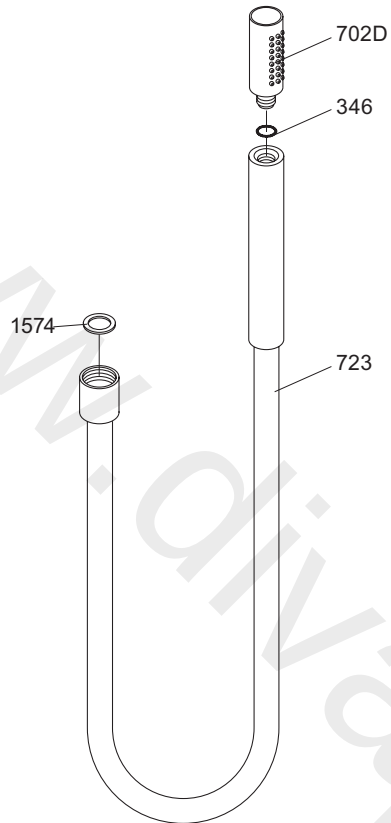

T2:

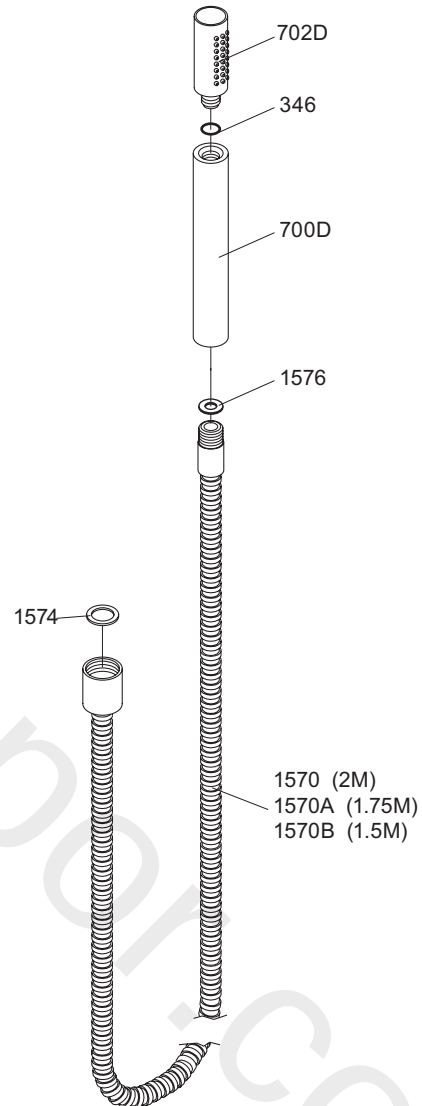



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA T2V & T2

Date
Sep. 07

Rev.
1

Sheet
SB 40

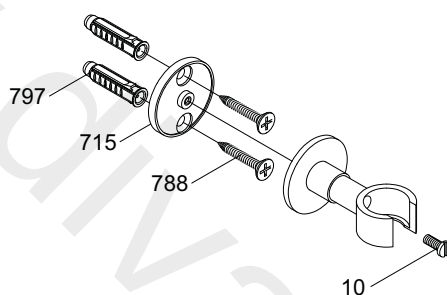

VOLA A/S
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA T8

Dato

Jan. 96

Rev.

1

Blad

SB 40.6