




A diagram showing three cylindrical components mounted on a horizontal plate. The middle component has a curved arrow indicating rotation.

voilà



5 705230 287317

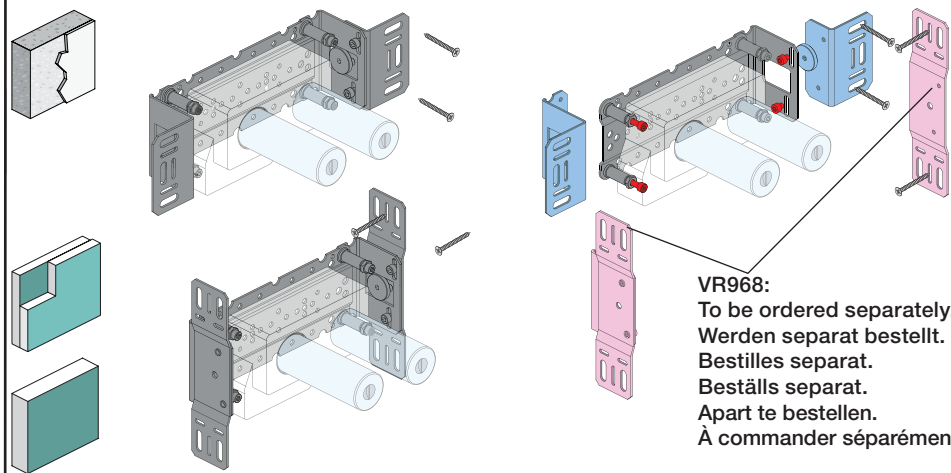[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)


5100/5200V/5300:  5400/5600A3:  - 

5400/5600:  -  5400/5600A4:  - 


B Check the local legislation.
 Bitte die örtlichen Vorschriften überprüfen.
 Tjek de lokale regler.
 Kontrollera lokala föreskrifter
 Nazitten lokale regelgeving.
 Vérifiez la législation locale.





**!DO NOT!
!REMOVE!**



PEX1

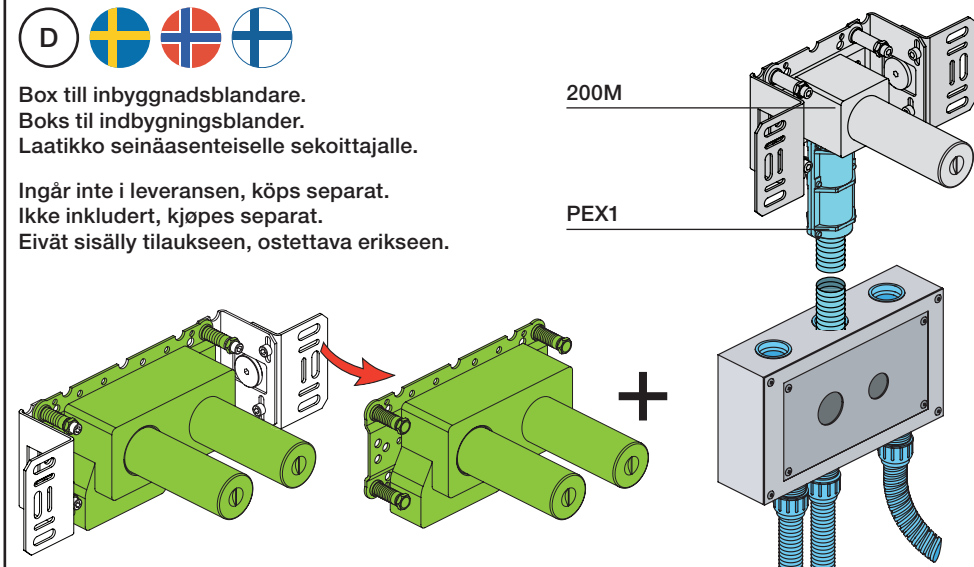


Y Min. 48 mm
Max. 110 mm

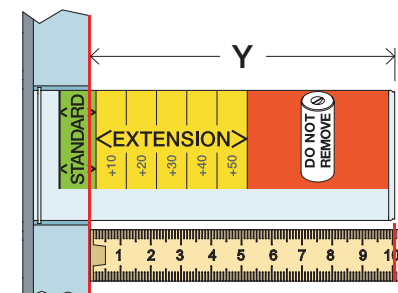

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50


Montering af forlængerdele
Montering av förlängning

VR2019+, VR2119+

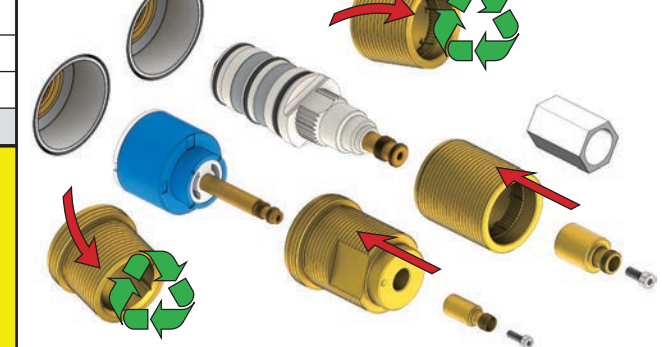



5400:
5600:

5400A3/A4:
5600A3/A4:

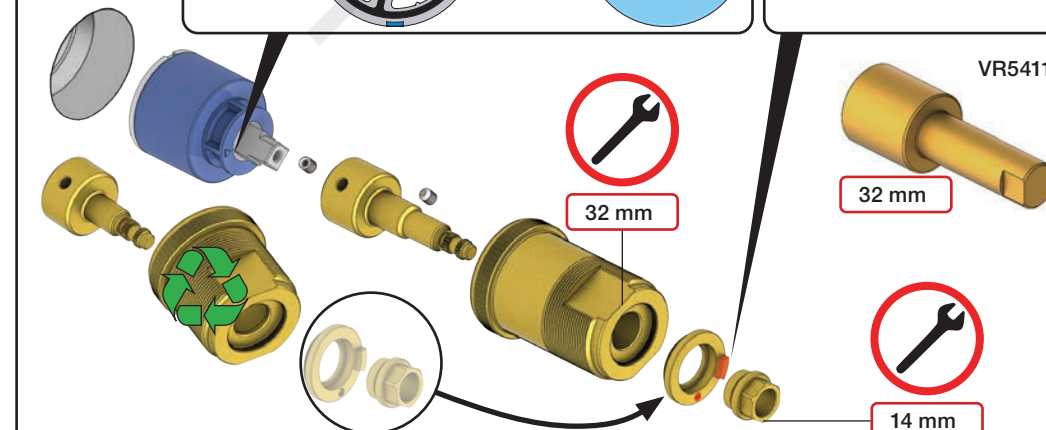


X_{52 - 0 mm}

X_{-15 - 0 mm}



	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

	Montage van de verlengstukken	
	Montage des rallonges	


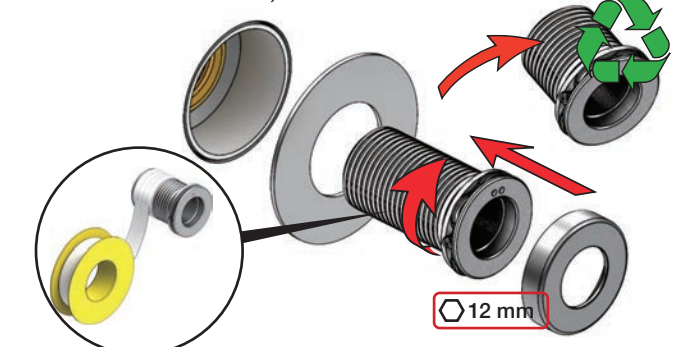



5400/5600: 5400A3/ 5600A3: 5400A4:


5600A4:

32 mm

14 mm

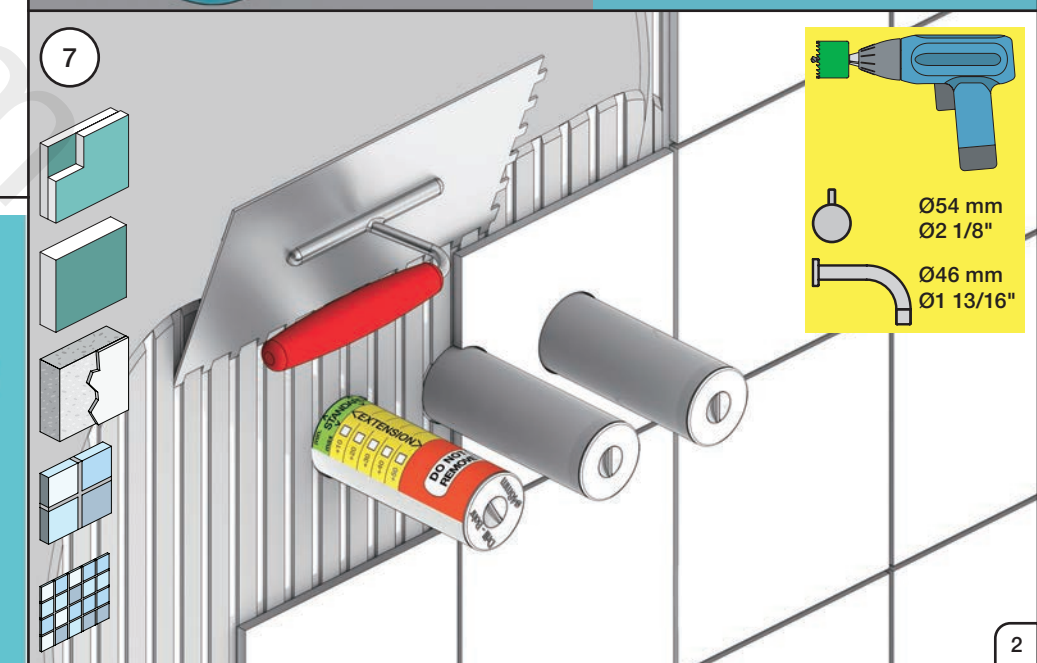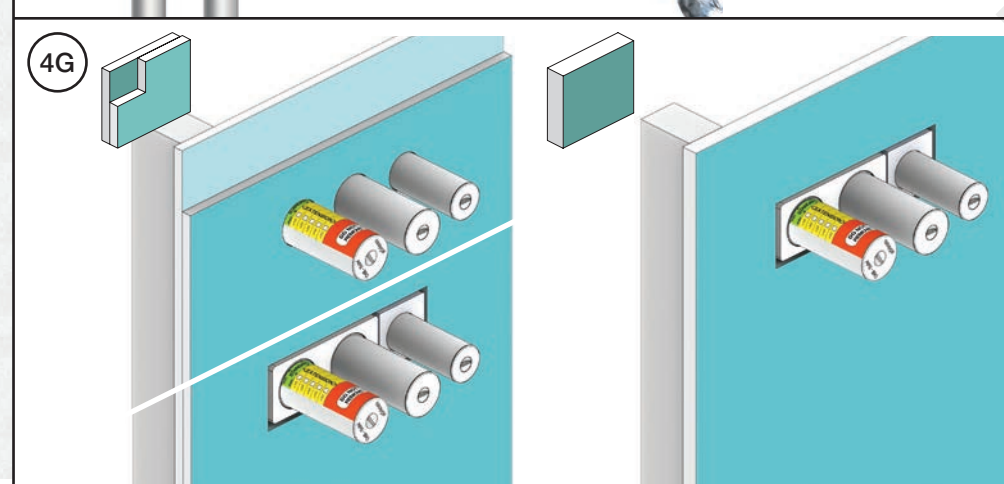

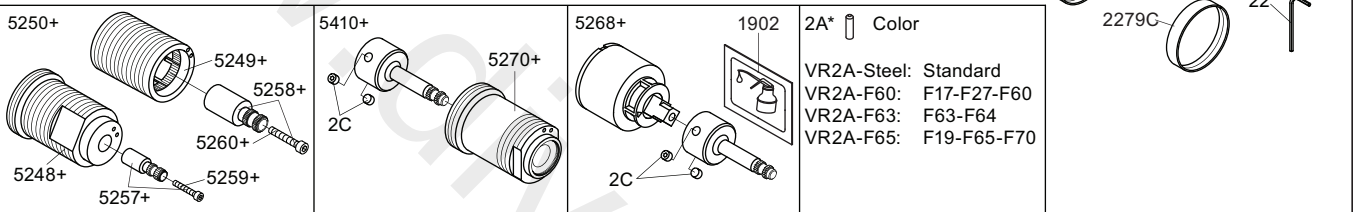

5400VA3 5600VA3  2929	5400NVA3 5400TVA3  2930	5400FVA3 5400RVA3  2929 2928	5400DVA3  2934
--	--	---	---

