




voilà

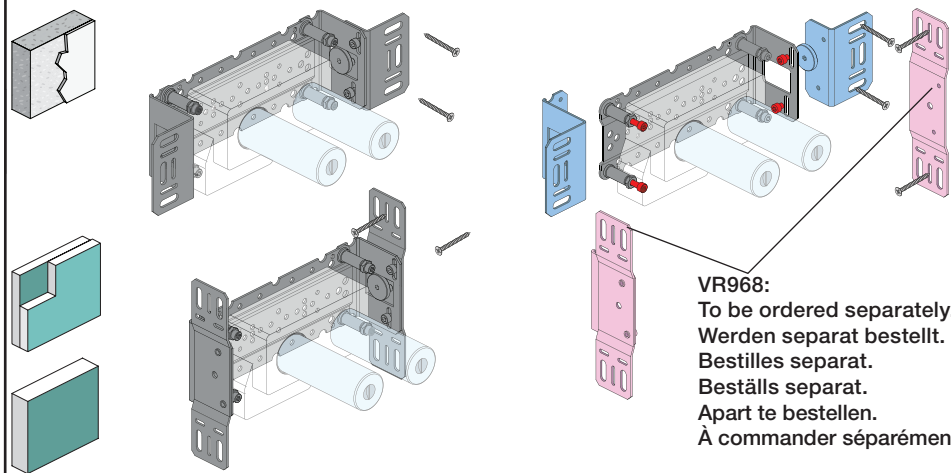

5 705230 287317

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.


 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

5100/5200V/5300:  5400/5600A3:  - 


5400/5600:  -  5400/5600A4:  - 

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-		32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	-		32/(8.5)

**!DO NOT!
!REMOVE!**





PEX1

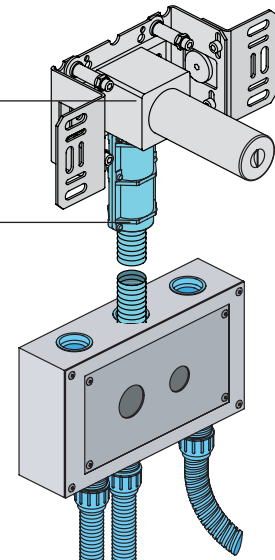

A yellow threaded plug is shown on the left. A selection pin points from the plug to a grid of six circular options on the right. The options are arranged in two rows of three:

- Top row: STD, +10, +20
- Bottom row: +30, +40, +50



Y Min. 48 mm
Max. 110 mm

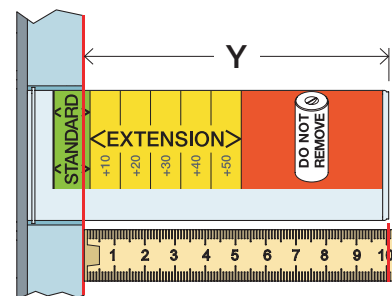

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50



Montering af forlængerdele
Montering av förlängning

VR2019+. VR2119+

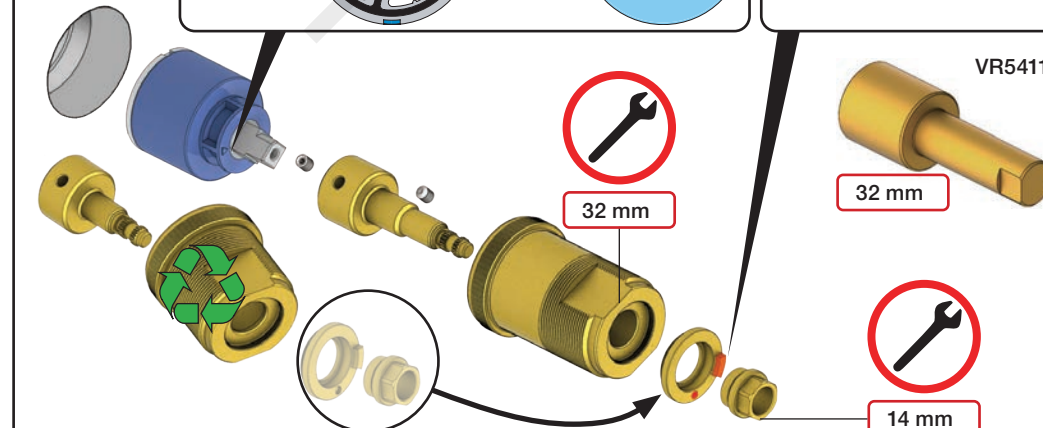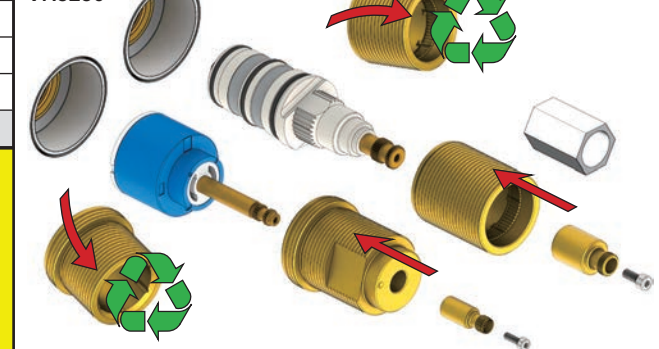


X₅₂ - 0 mm

X_{-15 - 0 mm}



	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges

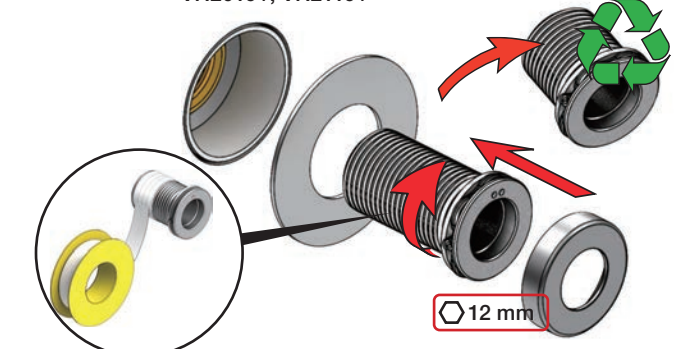



5400/5600: 5400A3/ 5600A3: 5400A4:

5600A4:


VR5411

32 mm


14 m

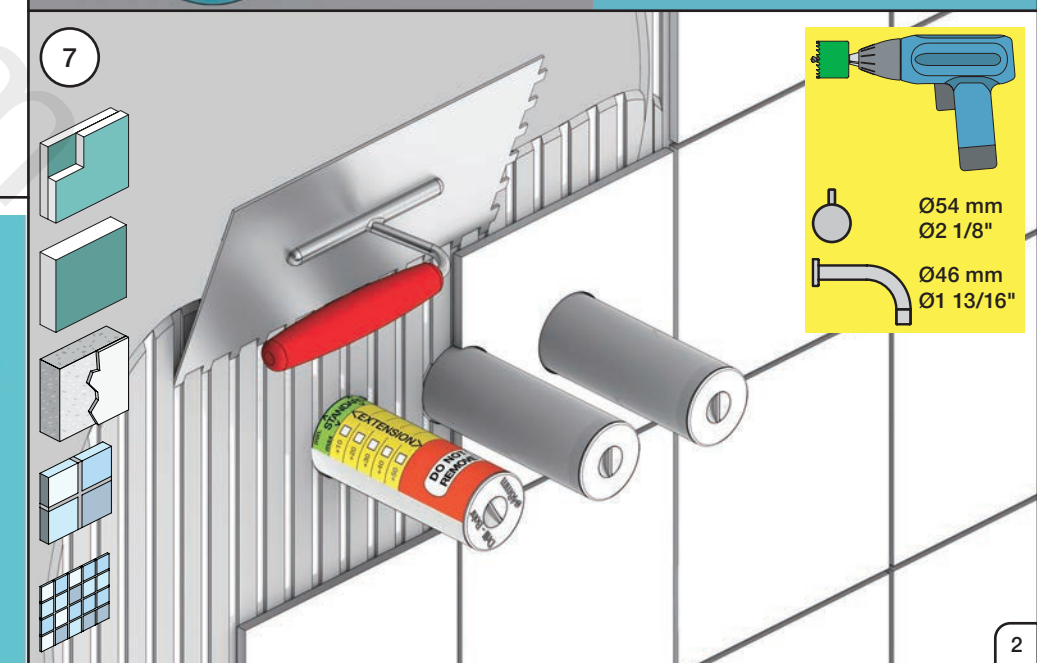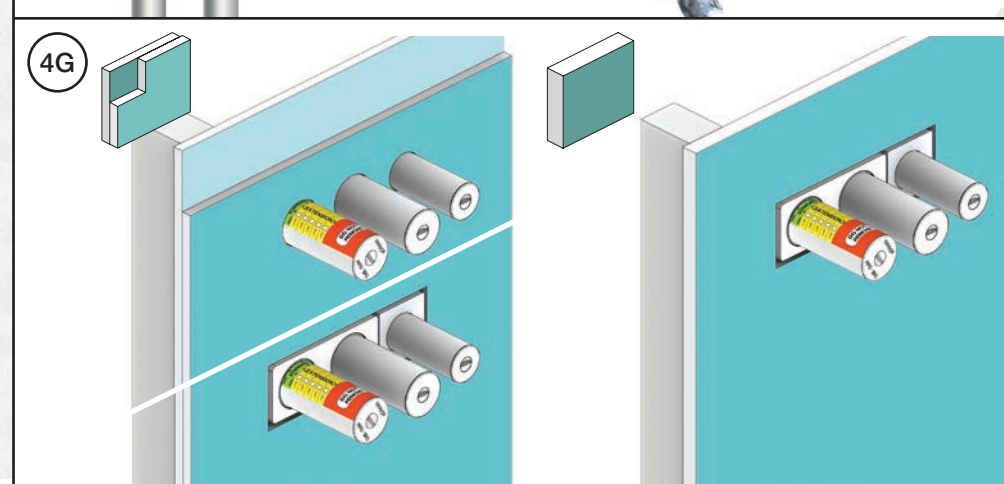


5400VA3

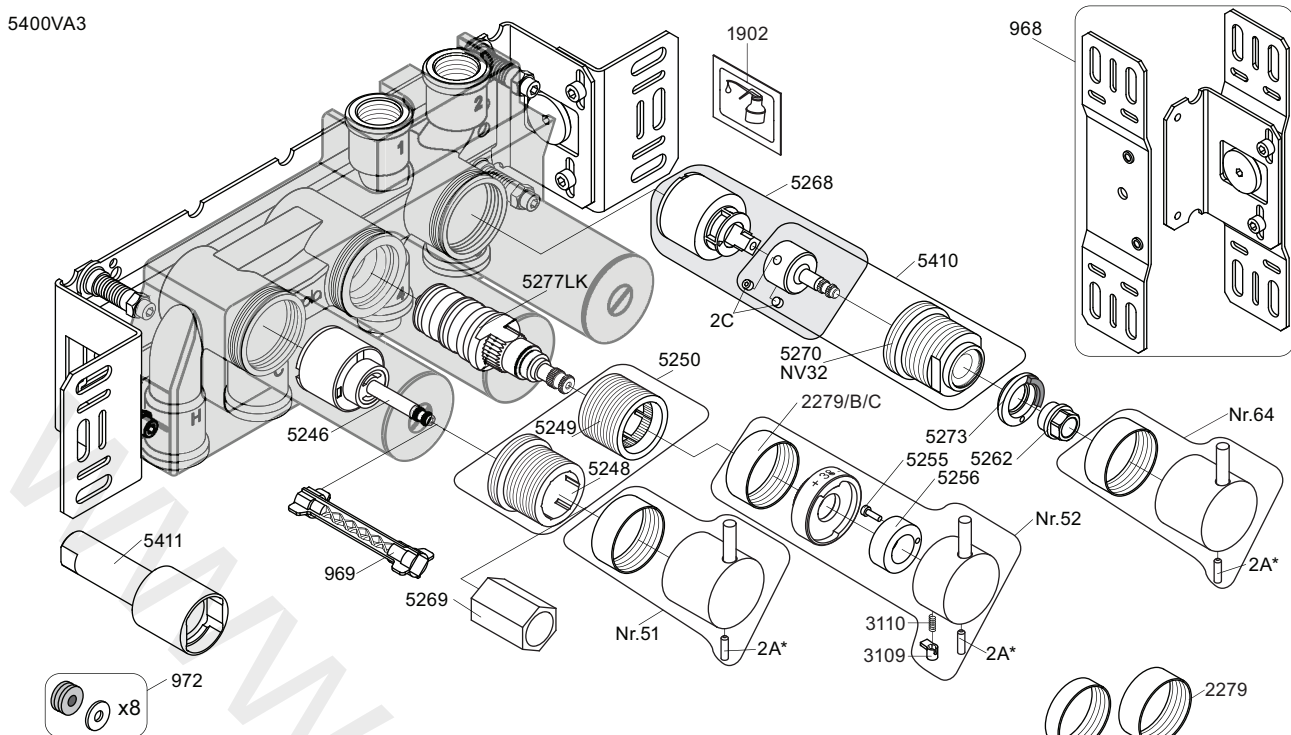


5250+



5410+



5268+



1902



2A* Color

VR2A-Steel: Standard
 VR2A-F60: F17-F27-F60
 VR2A-F63: F63-F64
 VR2A-F65: F19-F65-F70



NR51:

VR5251, VR2279+B+C, VR2A

NR52:

VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR2A

NR64:

VR5251, VR2279+B+C, VR2A

VR3113:

VR3109, VR3110, VR5255

VR5250+:

VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260

VR5257+:

VR5257+, VR5259+

VR5258+:


VR5258+, VR5260+

VR5268+:


2xVR2C, VR1902, VR5268

VR5410+:


2xVR2C, VR5270+

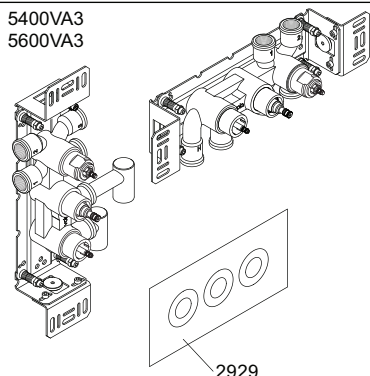5400VA3
5600VA3

2929

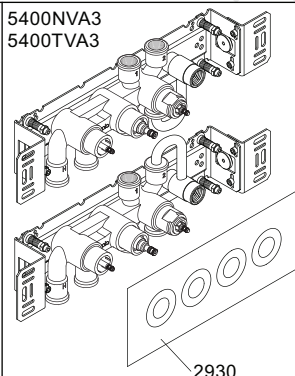
5400NVA3
5400TVA3

2930

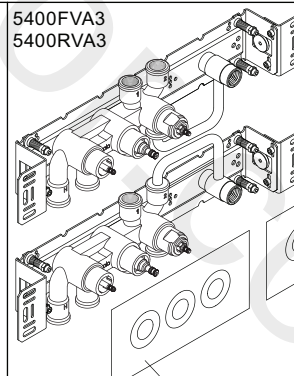5400FVA3
5400RVA3


2929

5400DVA3




2934


5003B



5004B



5004L



3x2001




3x2001, 001



3x2001, 001



2001



vola

Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 5400VA3

5400FVA3, 5400NVA3

5400RVA3, 5400TVA3

5600VA3

Date

May 22

Rev.

6

Sheet

SB 10.54