

VOLA 5100, 5100X, 5200V, 5300
VOLA 5400DV, 5400V, 5400NV & A3/A4
VOLA 5400TV, 5400FV, 5400RV & A3/A4
VOLA 5600V & A3/A4

Fitting instruction
Montageanleitung
Monteringsvejledning



Monteringsvægledning
Montage hanleiding
Manuel de montage

www.vola.com

5000_V4_40998504
04-01-2023

5 705230 287317

vola.com	L	L1	L2	H	H1	D
5400DV	377 mm 14 3/4"	260 mm 10"	268 mm 10"	95 mm 3 3/4"	186mm 7 3/8"	70 mm 2 3/4"
5100, 5200V, 5300, 5400V, 5600V	475 mm 19 3/4"	355 mm 14"	367 mm 14 1/2"			
5100X, 5400NV, 5400TV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			
5400FV, 5400RV	630 mm 25 1/2"	514 mm 20 3/8"	522 mm 20 1/2"			

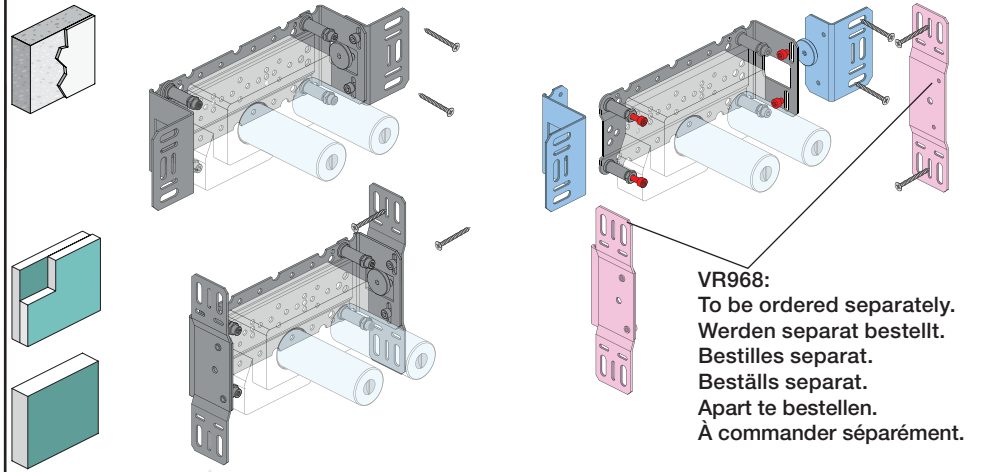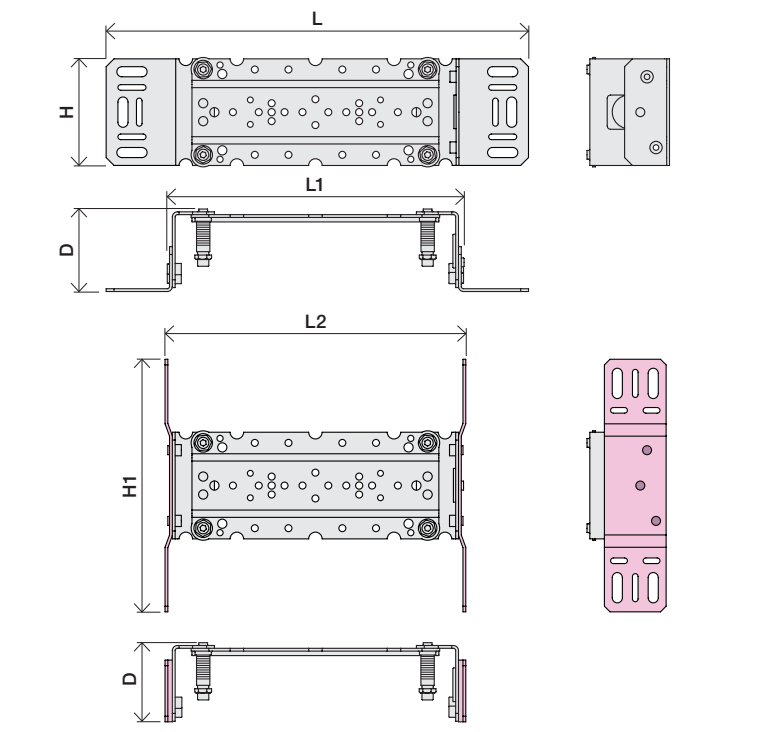

A

Max.: 10 Bar/145 psi
Max. 65°C, 150°F

USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

AUS - Hot water inlet: Max. 50°C, 122°F. (AS 4032)

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

5100/5200V/5300:

A

 5400/5600A3:

A

 -

C

5400/5600:

A

 -

B

 5400/5600A4:

A

 -

D

5400 5600	5400A3 5600A3	5400A4 5600A4							
			A	M	B	M	C	M	D
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-	-	32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-	-	32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	-	-	32/(8.5)

B

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

C

DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten

D

Box till inbyggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

200M
PEX1

Extension
Verlängerung
Forlængerdele
Förlängning
Aanpassing
Modification

T

Min. 3 mm
Max 65 mm

Y

Min. 48 mm
Max. 110 mm

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Fitting of extension
Montage von verlängerung
Montering af forlængerdele
Montering av förlängning

VR5250

VR5410

5400:
5600:

5400A3/A4:
5600A3/A4:

32 mm
14 mm

Extension, retrofit
Verlängerung, nachträglicher Einbau
Forlængerdele, eftermontering
Förlängning, eftermontering
Aanpassing na montage
Modification après installation

X

52 - 0 mm

X

-15 - 0 mm

	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges

VR2019+, VR2119+

12 mm

5400/5600:



5400A3/ 5600A3:

5400A4:


5600A4:

VR5411


32 mm
14 mm

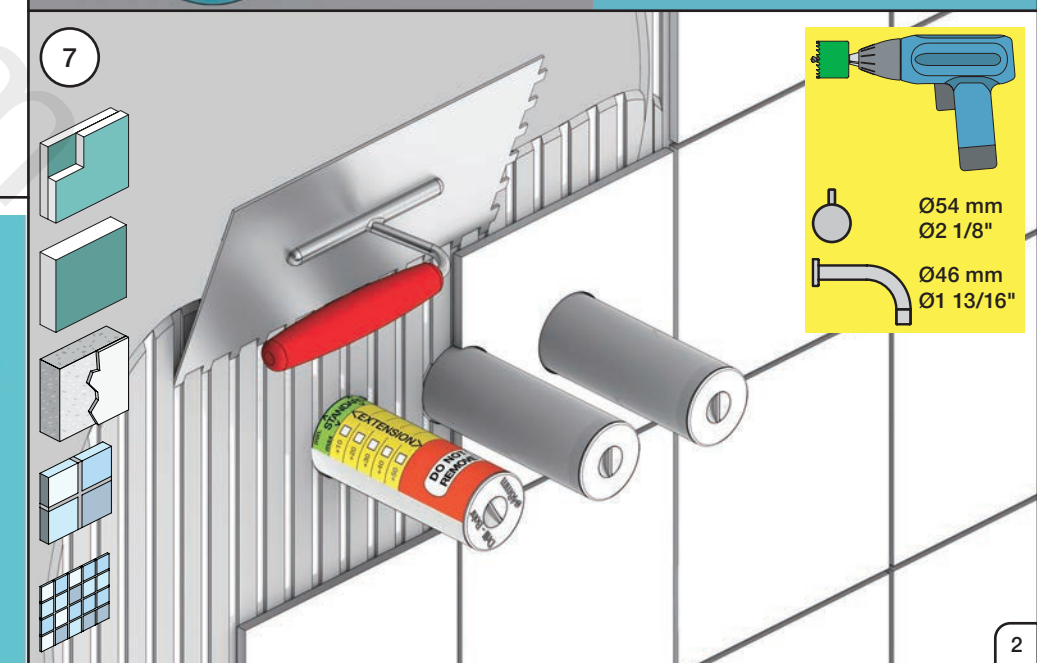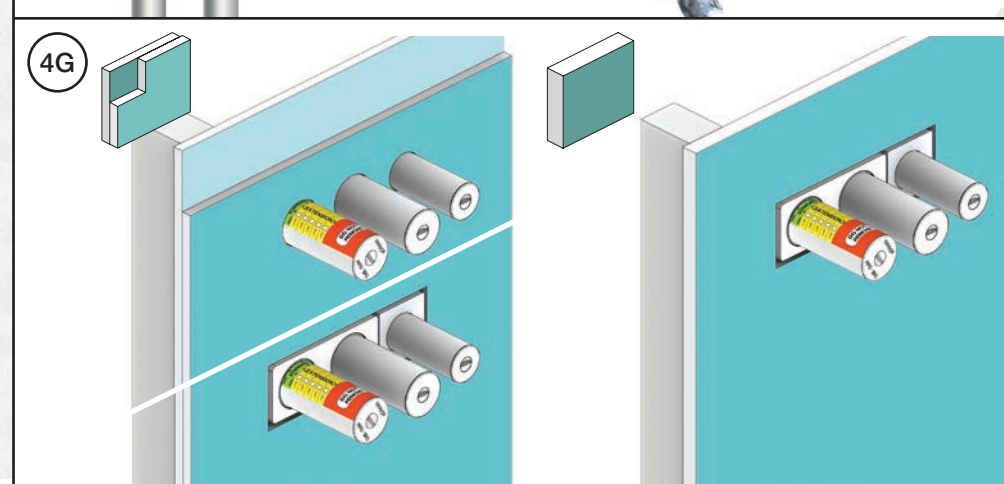


5400VA4

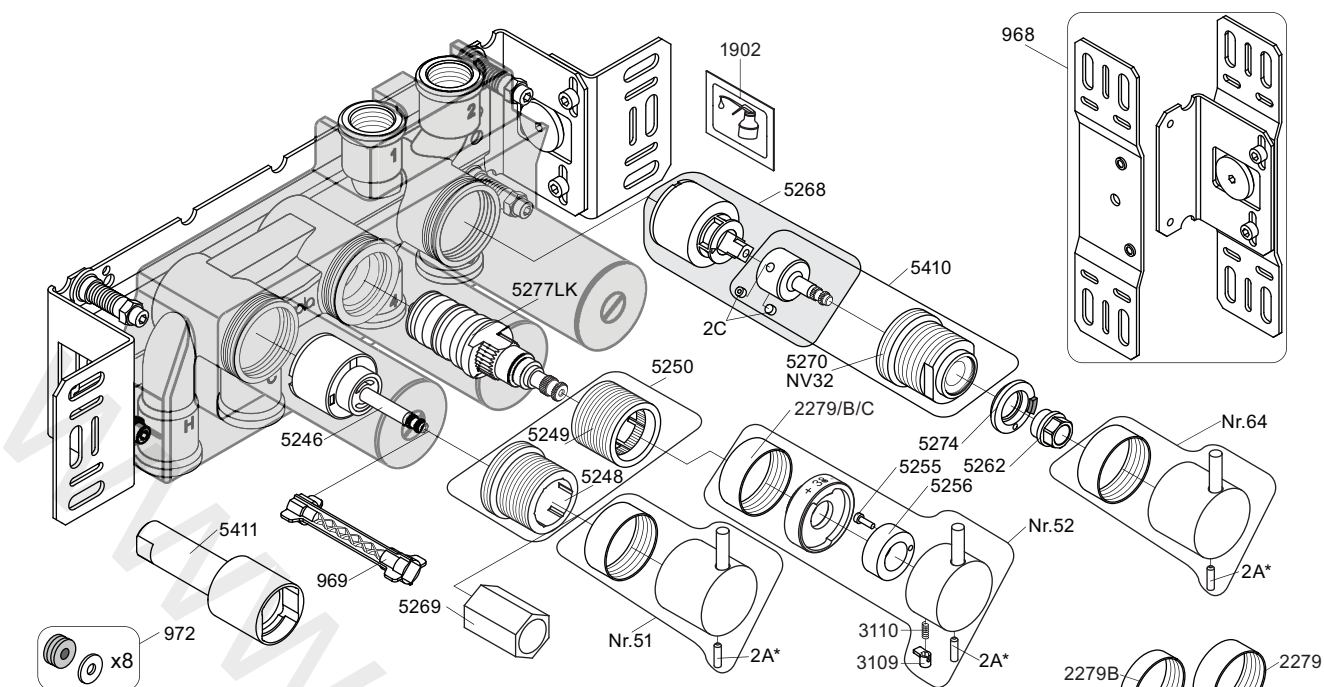


5250+



5410+



5268+



2A* Color

VR2A-Steel: Standard
VR2A-F60: F17-F27-F60
VR2A-F63: F63-F64
VR2A-F65: F19-F65-F70

NR51:

NR52:

NR64:

VR3113:

VR5250+:

VR5257+:


VR5258+:

VR5268+:

VR5410+:

VR5251, VR2279+B+C, VR2A
VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
VR5251, VR2279+B+C, VR2A
VR3109, VR3110, VR5255
VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+, VR5259+
VR5258+, VR5260+
2xVR2C, VR1902, VR5268
2xVR2C, VR5270+


5400VA4
5600VA4

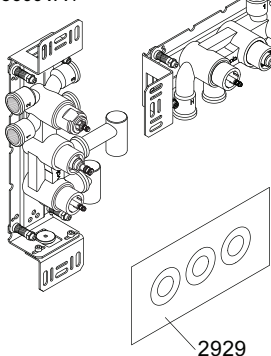

5003B

3x2001


5400NVA4
5400TVA4

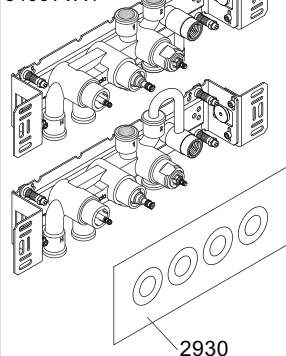

5004B

3x2001, 001


5400FVA4
5400RVA4

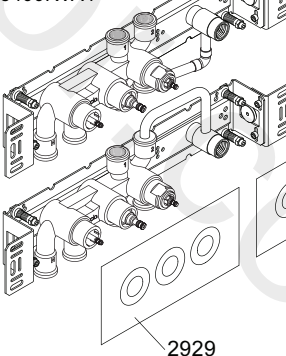

5004L

3x2001, 001

5400DVA4



2934

Date


Apr. 21

Rev.

6

Sheet

SB 10.54



voila

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@voila.com
www.voila.com

VOLA 5400VA4

5400FVA4, 5400NVA4

5400RVA4, 5400TVA4

5600VA4