


VOLA 5100, 5100X, 5200V, 5300
VOLA 5400DV, 5400V, 5400NV & A3/A4
VOLA 5400TV, 5400FV, 5400RV & A3/A4
VOLA 5600V & A3/A4

Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsv gledning
Montage hanleiding
Manuel de montage


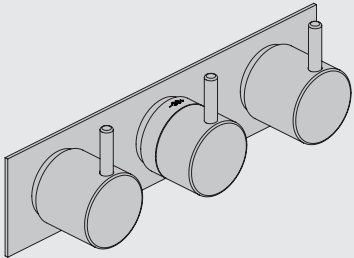


www.vola.com

5000_V4_40998504
04-01-2023

5 705230 287317

	L	L1	L2	H	H1	D
5400DV	377 mm 14 3/4"	260 mm 10"	268 mm 10"	95 mm 3 3/4"	186mm 7 3/8"	70 mm 2 3/4"
5100, 5200V, 5300, 5400V, 5600V	475 mm 19 3/4"	355 mm 14"	367 mm 14 1/2"			
5100X, 5400NV, 5400TV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			
5400FV, 5400RV	630 mm 25 1/2"	514 mm 20 3/8"	522 mm 20 1/2"			

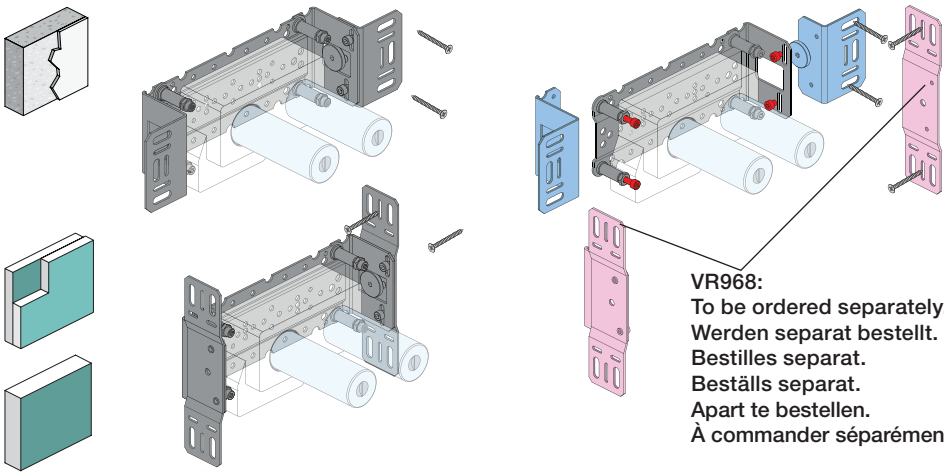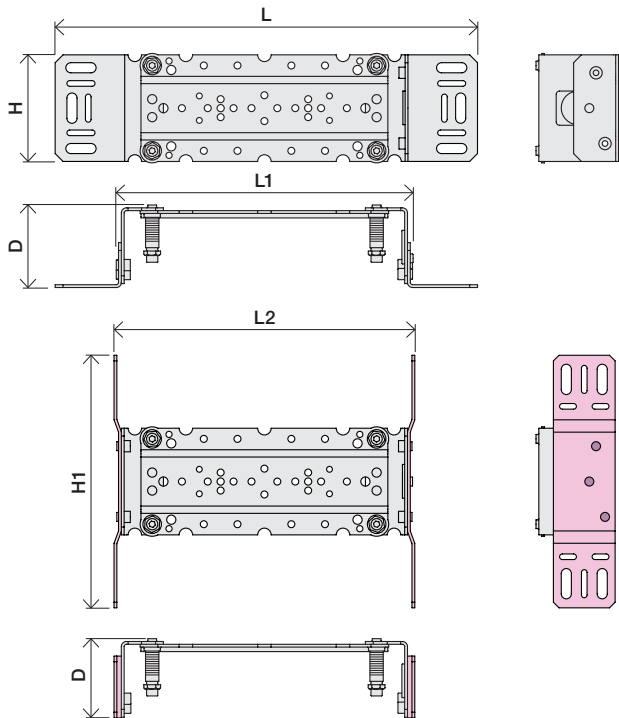

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Apart te bestellen.
  commander s par ment.

A Max.: 10 Bar/145 psi
Max. 65 C, 150 F

USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

AUS - Hot water inlet:
Max. 50 C, 122 F.
(AS 4032)

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

5100/5200V/5300: A 5400/5600A3: A - C

5400/5600: A - B 5400/5600A4: A - D

5400 5600	5400A3 5600A3	5400A4 5600A4	A	M	B	M	C	M	D
2	2	2	A	M	B	M	C	M	D
3	3	3	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 2	Out 1	Out 1	-	-	32/(8.5)	16/(4.2)	-	-	-
Out 3	Out 2	Out 2	-	-	-	-	32/(8.5)	16/(4.2)	-
-	Out 3	Out 3	-	-	-	-	-	-	-
-	-	Out 4	-	-	-	-	-	-	32/(8.5)

B Check the local legislation.
Bitte die  rtlichen Vorschriften  berpr fen.
Tjek de lokale regler.
Kontrollera lokala f reskrifter
Nazitten lokale regelgeving.
V rifiez la l gislation locale.

**!DO NOT!
!REMOVE!**

C DE: Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

D Box till inbyggnadsblandare.
Boks til indbygningsblander.
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.
Ikke inkludert, k pes separat.
Eiv t sis lly tilaukseen, ostettava erikseen.

200M

PEX1

Extension
Verl ngerung
Forl ngerdele
F rl ngning
Aanpassing
Modification

Min. 3 mm
Max 65 mm

Min. 48 mm
Max. 110 mm

Y

STANDARD
+10
+20
+30
+40
+50
DO NOT REMOVE

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Fitting of extension
Montage von verl ngerung
Montering af forl ngerdele
Montering av f rl ngning

VR5250

VR2019+, VR2119+

VR5410

5400:
5600:

5400A3/A4:
5600A3/A4:

32 mm

14 mm

Extension, retrofit
Verl ngerung, nachtr glicher Einbau
Forl ngerdele, eftermontering
F rl ngning, eftermontering
Aanpassing na montage
Modification apr s installation

X 52 - 0 mm

X -15 - 0 mm

	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges

VR5250/VR5410/VR2019

12 mm

5400/5600:

5400A3/ 5600A3:


5400A4:

5600A4:

VR5411


32 mm

14 mm

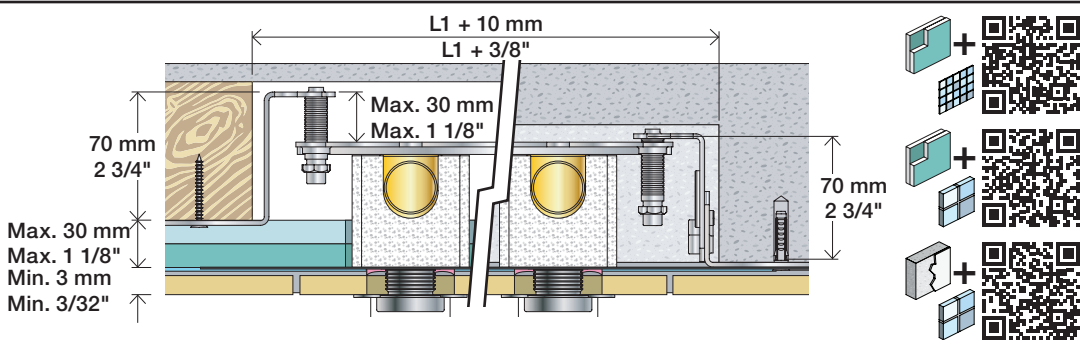


2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

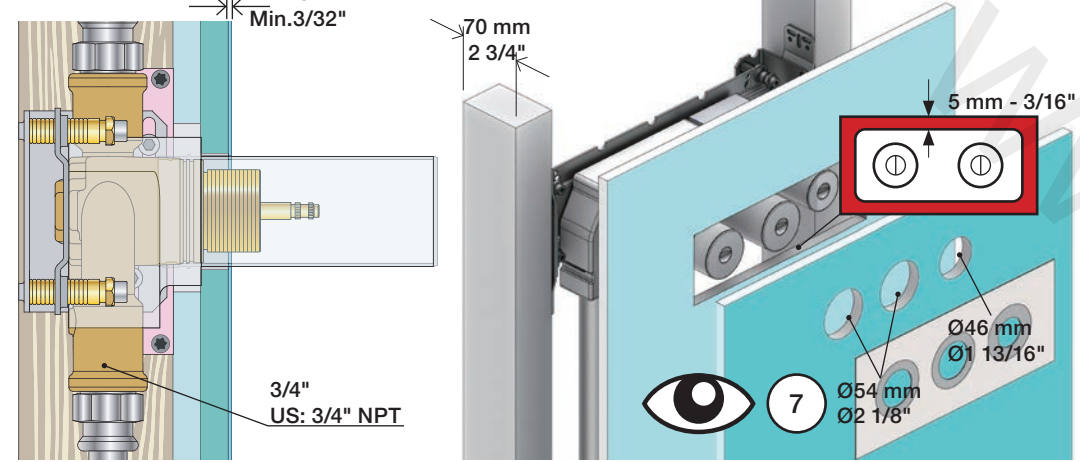


1x15 mm 1x18 mm 1x20 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

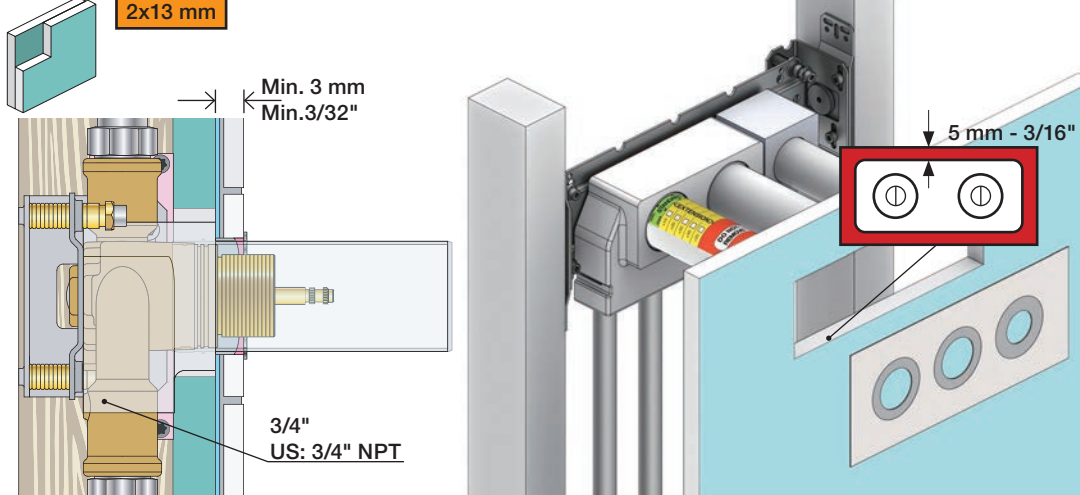

Masonry Mauerwerk Murverk Murwerk
Massive wand
Mur Plein

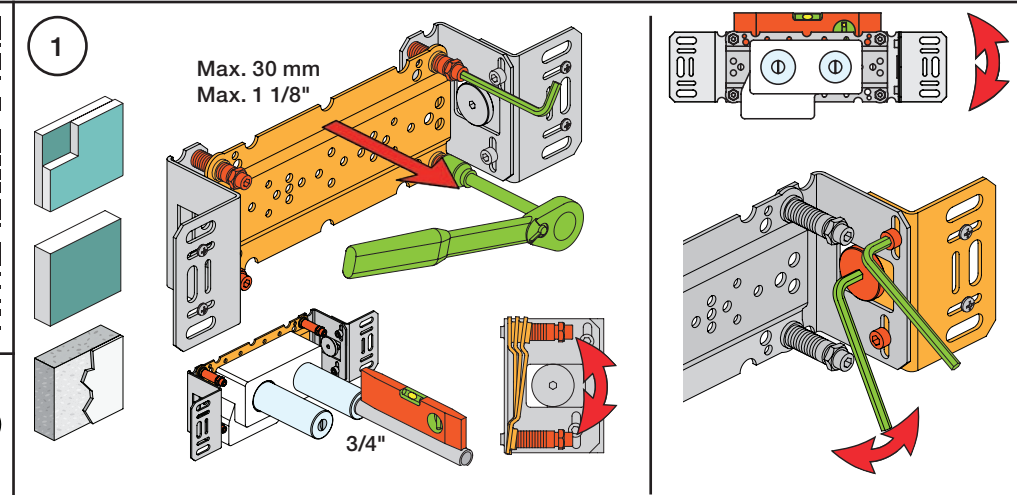

2 Test Pressure
Prüfdruck
testtryk
Test tryk
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau !
! MAX 1 Minute - Minut - Minuut !

