


VOLA 5100, 5100X, 5200V, 5300
VOLA 5400DV, 5400V, 5400NV & A3/A4
VOLA 5400TV, 5400FV, 5400RV & A3/A4
VOLA 5600V & A3/A4

Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsvægledning
Montage hanleiding
Manuel de montage


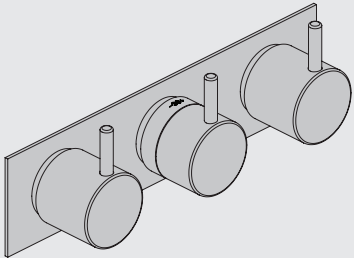


www.vola.com

5000_V4_40998504
04-01-2023

5 705230 287317

	L	L1	L2	H	H1	D
5400DV	377 mm 14 3/4"	260 mm 10"	268 mm 10"	95 mm 3 3/4"	186mm 7 3/8"	70 mm 2 3/4"
5100, 5200V, 5300, 5400V, 5600V	475 mm 19 3/4"	355 mm 14"	367 mm 14 1/2"			
5100X, 5400NV, 5400TV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			
5400FV, 5400RV	630 mm 25 1/2"	514 mm 20 3/8"	522 mm 20 1/2"			

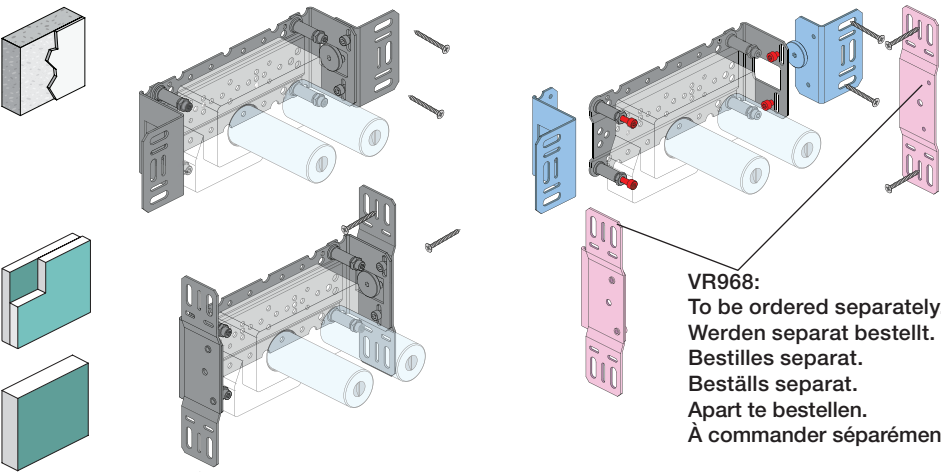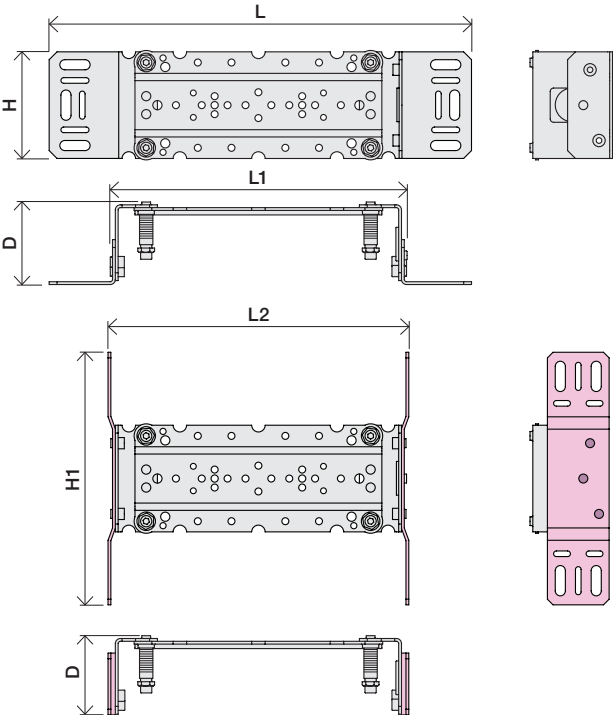

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
Max. 65°C, 150°F

USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

5100/5200V/5300: **A** 5400/5600A3: **A** - **C**

5400/5600: **A** - **B** 5400/5600A4: **A** - **D**

5400 5600	5400A3 5600A3	5400A4 5600A4							
- 2	1 2	1 2	A	M	B	M	C	M	D
- 3	- 3	4 3	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 2	Out 1	Out 1	-	-	32/(8.5)	16/(4.2)	-	-	-
Out 3	Out 2	Out 2	-	-	-	-	32/(8.5)	16/(4.2)	-
-	Out 3	Out 3	-	-	-	-	-	-	-
-	-	Out 4	-	-	-	-	-	32/(8.5)	-

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

**!DO NOT!
!REMOVE!**

C DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten

D

Box till inbyggnadsblandare.
Boks til indbygningsblandner.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

200M
PEX1

Extension
Verlängerung
Forlængerdele
Förlängning
Aanpassing
Modification

T Min. 3 mm
Max 65 mm

Y Min. 48 mm
Max. 110 mm

VR5250/VR5410/VR2019

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Fitting of extension
Montage von verlängerung
Montering af forlængerdele
Montering av förlängning

VR5250

VR2019+, VR2119+

VR5410

5400:
5600:

5400A3/A4:
5600A3/A4:

VR5411

32 mm

14 mm

Extension, retrofit
Verlängerung, nachträglicher Einbau
Forlængerdele, eftermontering
Förlängning, eftermontering
Aanpassing na montage
Modification après installation

X 52 - 0 mm

X -15 - 0 mm

	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges

VR5250/VR5410/VR2019

12 mm

5400/5600:

5400A3/ 5600A3:



5400A4:

5600A4:

VR5411

32 mm



14 mm

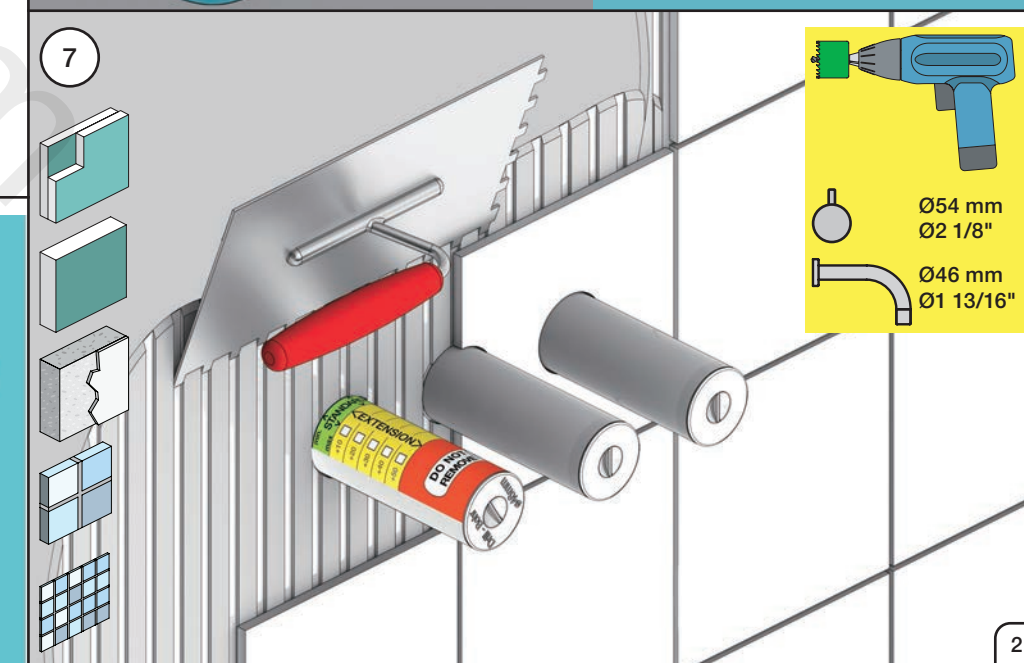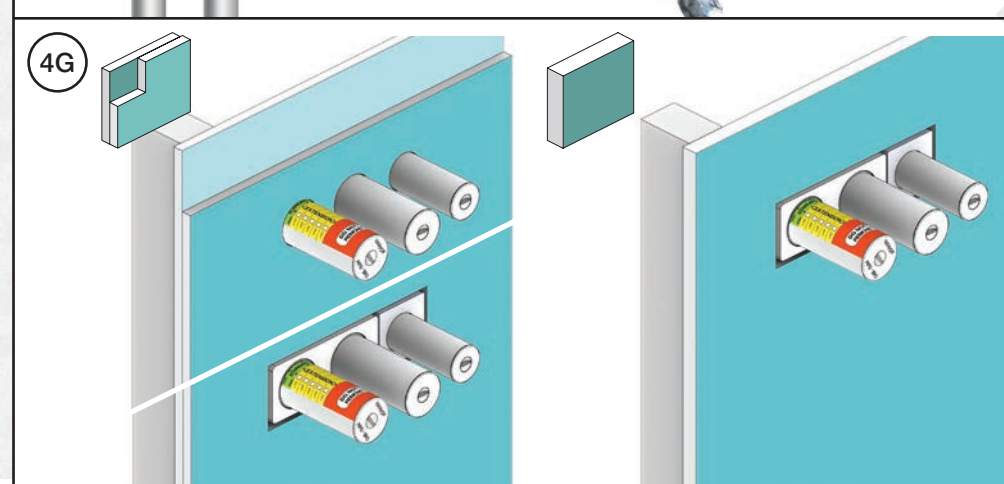

5400V

Exploded view diagram of a 5400V electrical component assembly. The diagram shows the main housing (5277LK) and various internal and external components. Key parts labeled include:

- 1: Terminal block
- 2: Terminal block
- 2C: Terminal block
- 5268: Terminal block
- 5410: Terminal block
- 5270 NV32: Terminal block
- 2279/B/C: Terminal block
- 5272: Terminal block
- 5255: Terminal block
- 5262: Terminal block
- 5256: Terminal block
- Nr.64: Terminal block
- 2A*: Terminal block
- 2279B: Terminal block
- 2279: Terminal block
- 3110: Terminal block
- 3109: Terminal block
- 2A*: Terminal block
- 5246: Terminal block
- 5249: Terminal block
- 5248: Terminal block
- 2279/B/C: Terminal block
- Nr.51: Terminal block
- 2A*: Terminal block
- 5269: Terminal block
- 972: Terminal block
- 969: Terminal block
- 5411: Terminal block
- 968: Terminal block
- 972 x8: Terminal block



5400NV
5400TV

2930

5400DV

2934

5004B

5004L

3x2001, 001

3x2001, 001

©
2001



Date
May 22

Rev. 5

Sheet
SB 10.54