




voilà




5 705230 287317

[illegible]


 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:  
Max. 50°C, 122°F.  
(AS 4032)

**B** Check the local legislation.  
 Bitte die örtlichen Vorschriften überprüfen.  
 Tjek de lokale regler.  
 Kontrollera lokala föreskrifter  
 Nazitten lokale regelgeving.  
 Vérifiez la législation locale.

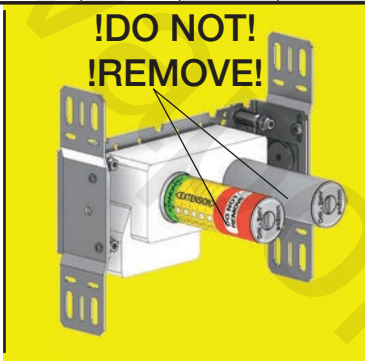


**Y** Min. 48 mm  
Max. 110 mm

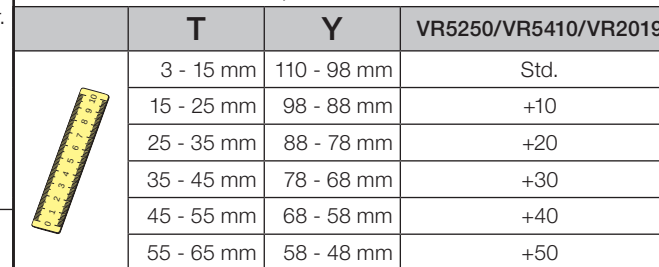

Montering af forlængerdele  
Montering av förlängning

VR2019+, VR2119+

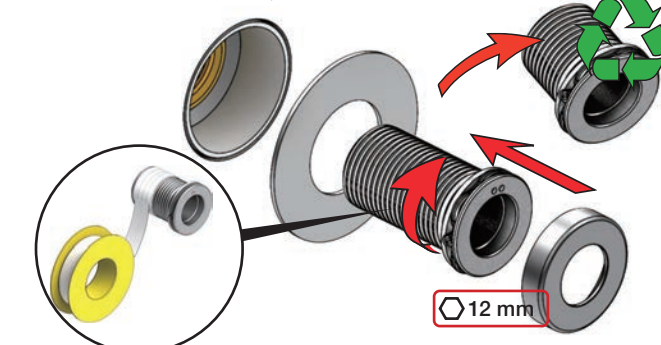

5400:  
5600:



5400A3/A4:  
5600A3/A4:

32 mm

14 mm

r



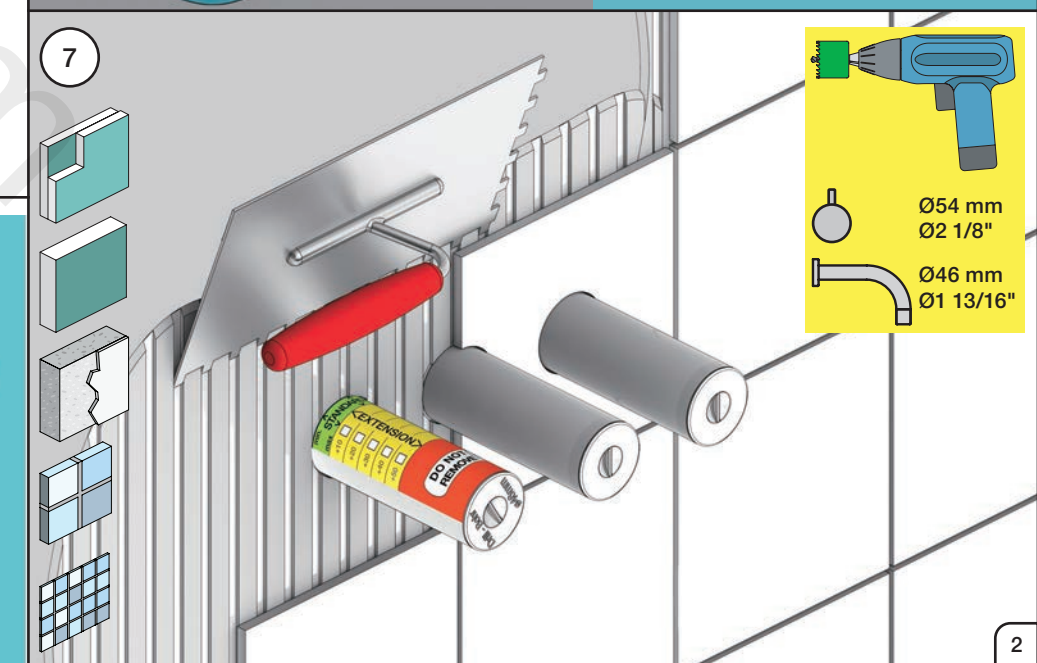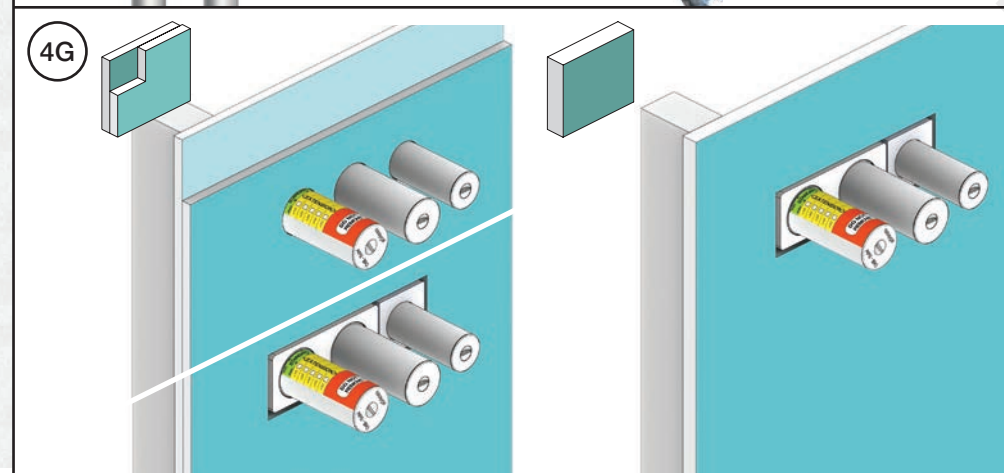



5400V

5250+

5410+

5268+

1902

2A\* Color

5249+

5258+

5260+

5248+

5259+

5257+

5270+

2C

2C

2C

VR2A-Steel: Standard

VR2A-F60: F17-F27-F60

VR2A-F63: F63-F64

VR2A-F65: F19-F65-F70

2279B

2279C

22

NR51:

VR5251, VR2279+B+C, VR2A

NR52:

VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A

NR64:

VR5251, VR2279+B+C, VR2A

VR3113:

VR3109, VR3110, VR5255

VR5250+:

VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260

VR5257+:

VR5257+, VR5259+

VR5258+:

VR5258+, VR5260+

VR5268+:

2xVR2C, VR1902, VR5268

VR5410+:

2xVR2C, VR5270+

5400V

5600V

2929

5400NV

5400TV

2930

5400FV

5400RV

2929

5400DV

2934

5003B

5004B

5004L

3x2001

3x2001, 001

3x2001, 001

2001

volà

Lunavej 2

DK-8700 Horsens

Tlf : + 45 7023 5500

sales@vola.com

www.vola.com

VOLA 5400V

5400FV, 5400NV

5400RV, 5400TV

5600V

Date

May 22

Rev.

5

Sheet

SB 10.54