




A diagram showing three cylindrical components mounted on a horizontal plate. The middle component has a curved arrow indicating rotation.

voilà



5 705230 287317

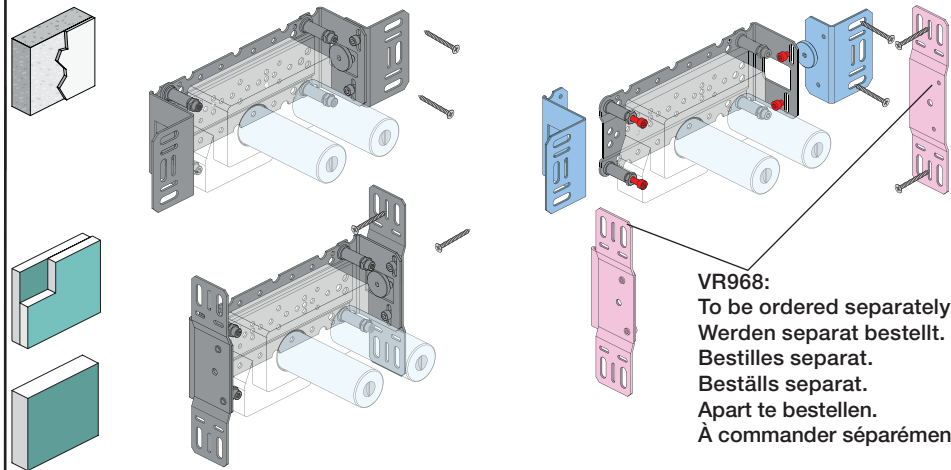[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
Max. 65°C, 150°F

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

5100/5200V/5300:  5400/5600A3:  - 


5400/5600:  -  5400/5600A4:  - 

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	-	-	-	-
-	Out 3	Out 3	-	-	-	16/(4.2)	32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-		-		32/(8.5)

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazittien lokale regelgeving.
Vérifiez la législation locale.



**!DO NOT!
!REMOVE!**




  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten



200M

PEX1

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

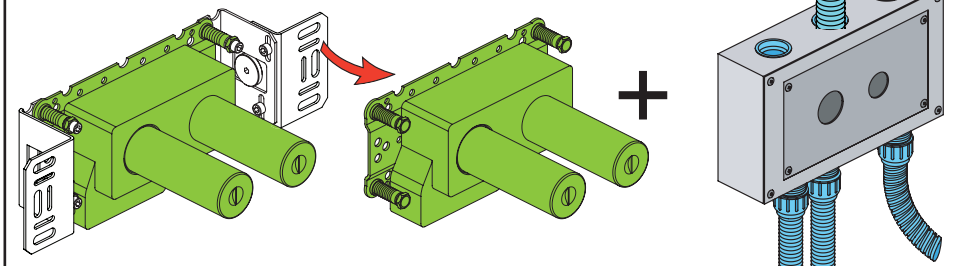



Y Min. 48 mm
Max. 110 mm

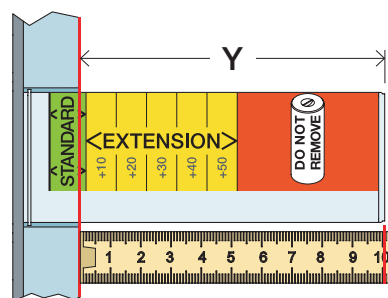

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50



Montering af forlængerdele
Montering av förlängning

VR2019+, VR2119+

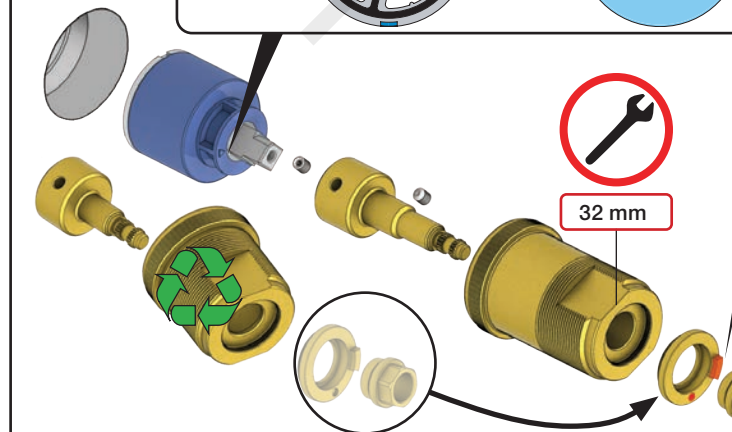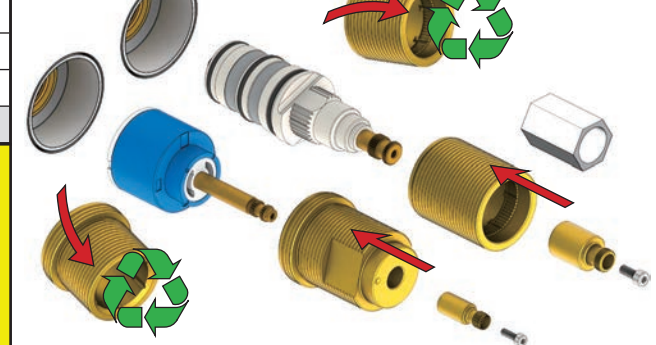


X_{52 - 0 mm}

X_{-15 - 0 mm}




	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50


Montage van de verlengstukken		
Montage des rallonges		

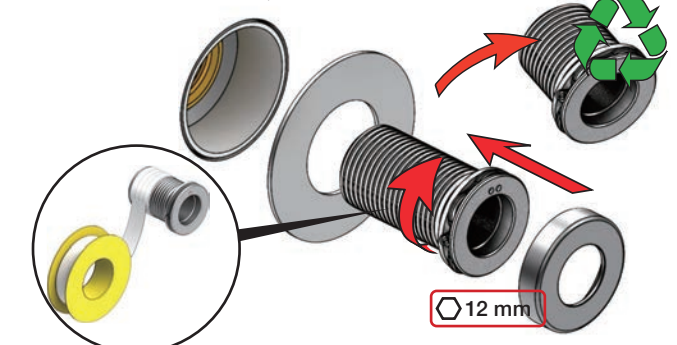


5400/5600: 5400A3/ 5600A3: 5400A4:

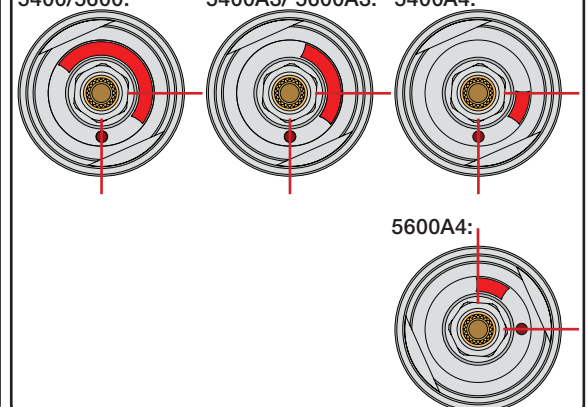


VR5411



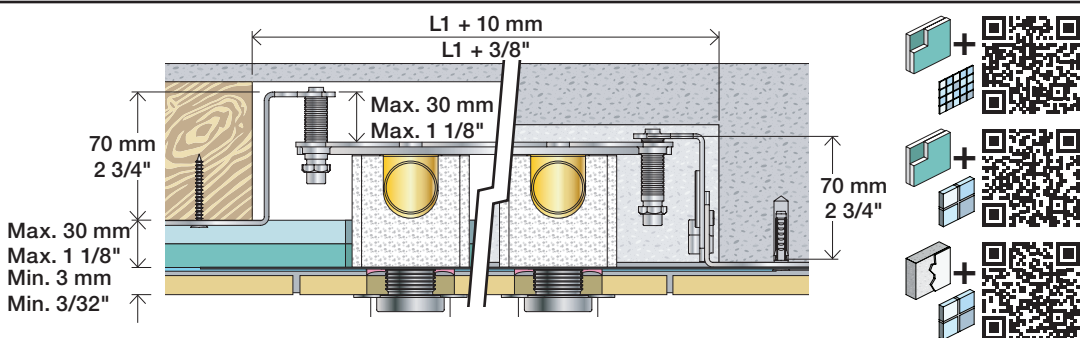

2x13 mm Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

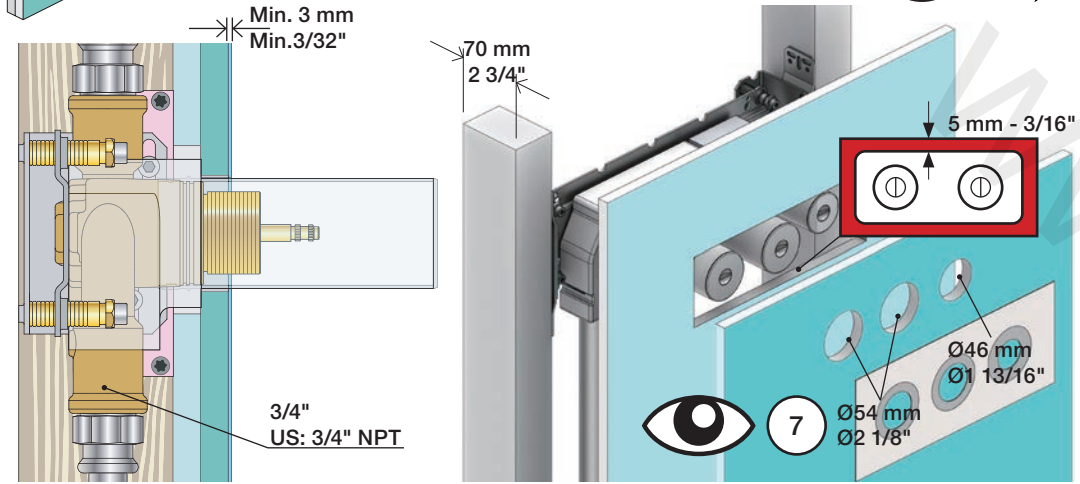

1x15 mm
1x18 mm
1x20 mm


Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

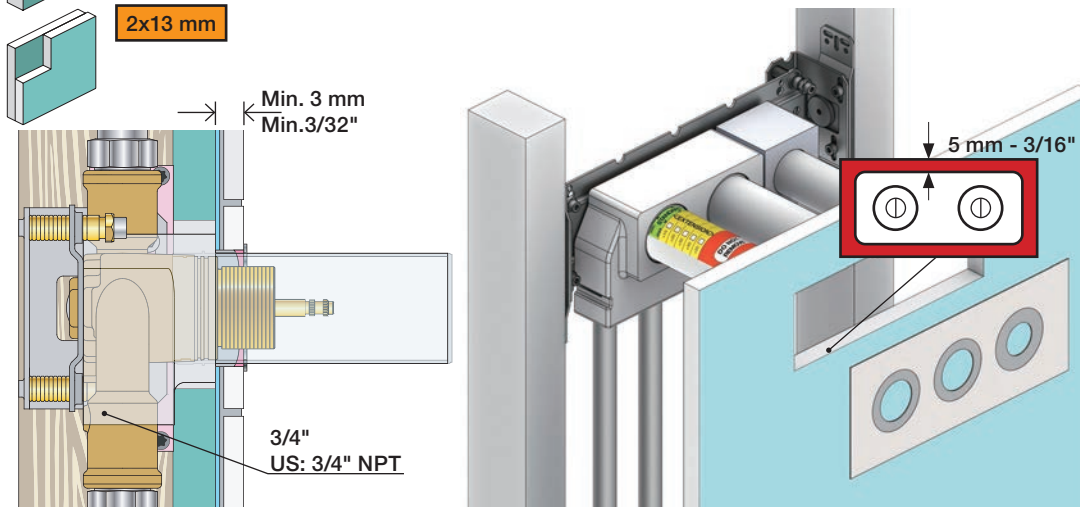

Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein

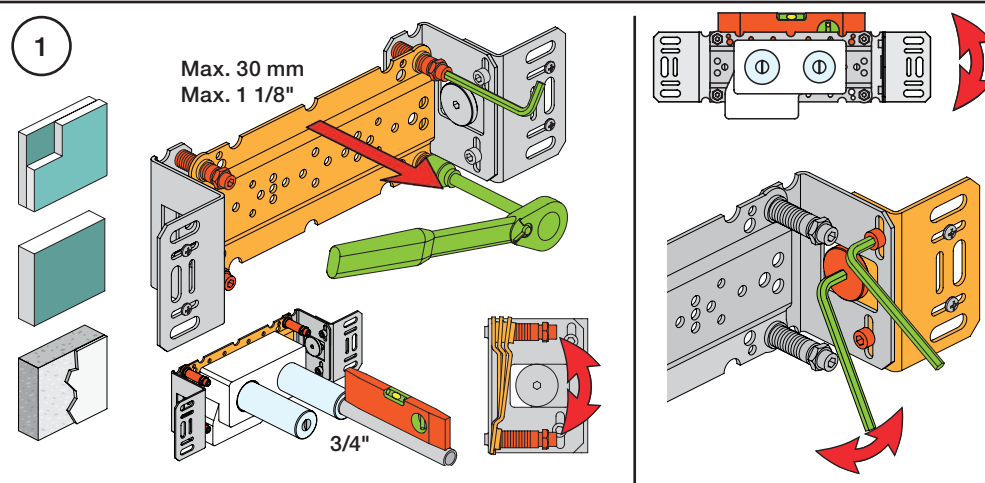








2 Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

1. MAX. 16 Bar 232 Psi

2. MAX. 4 Bar 58 Psi

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

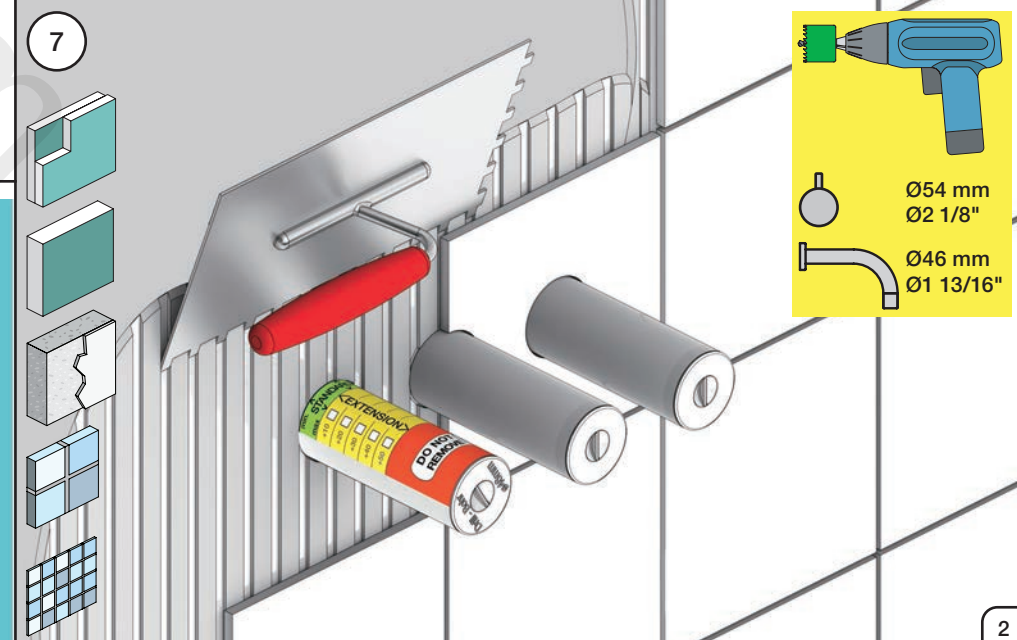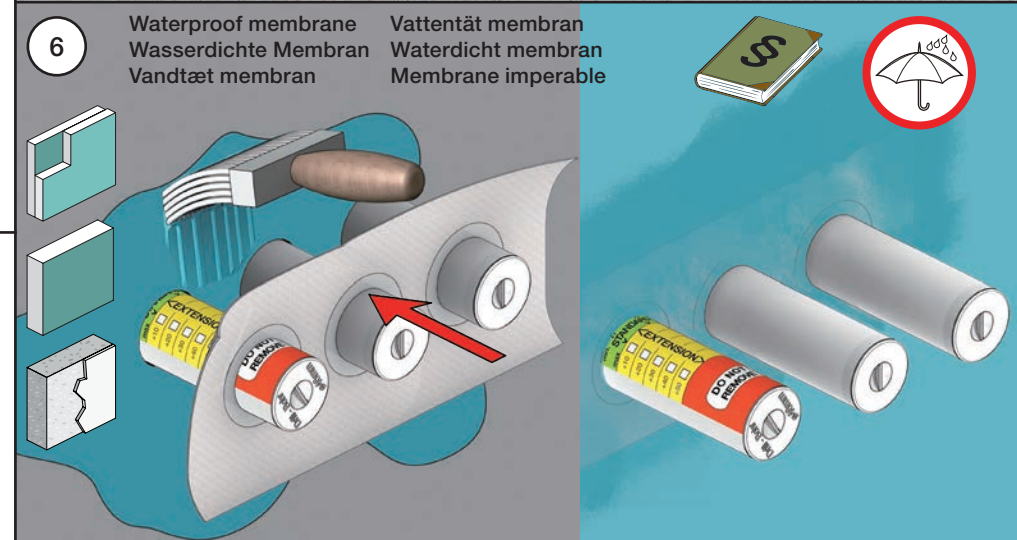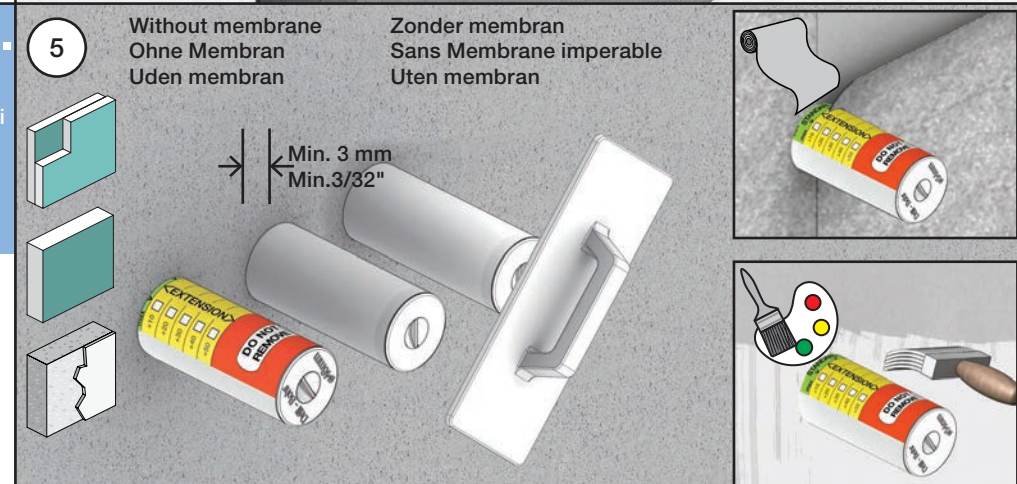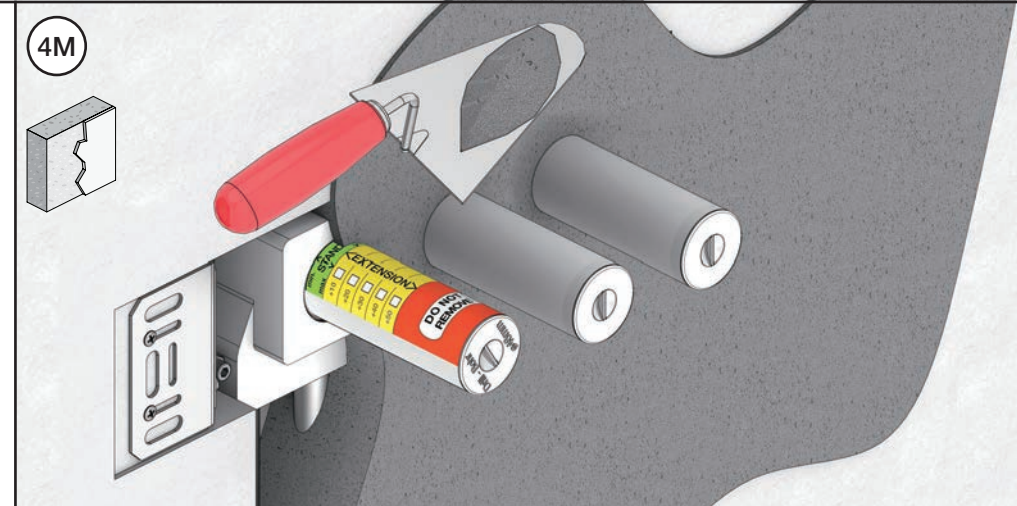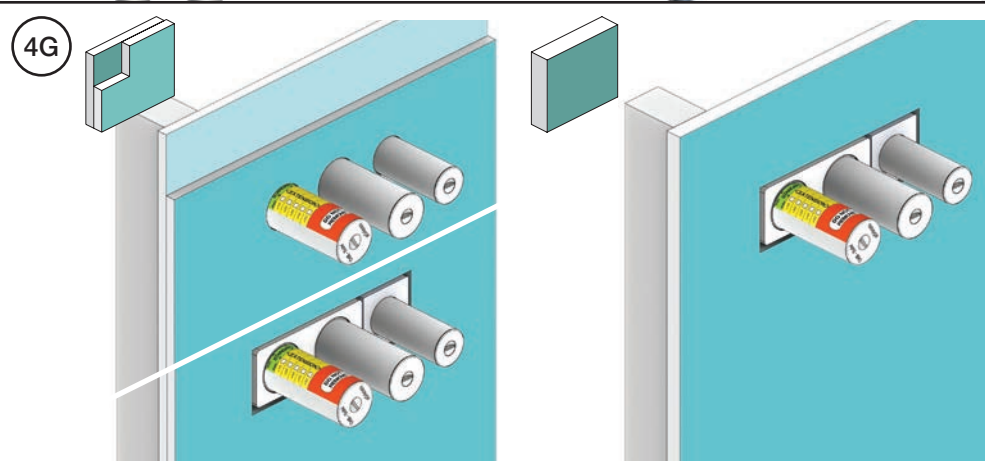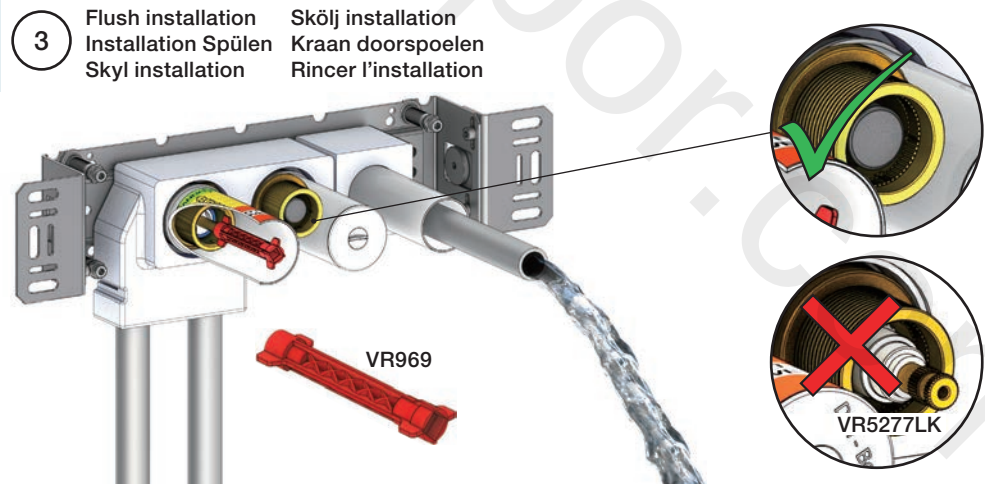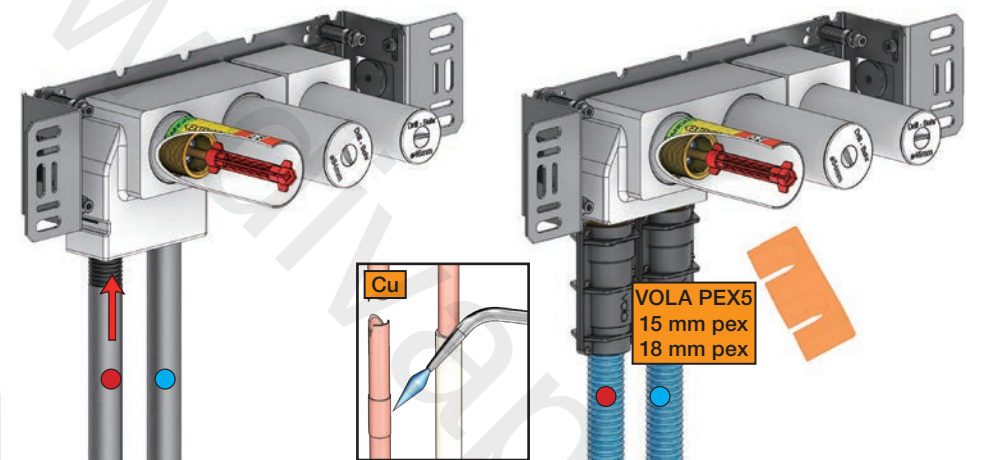

5400V

5250+

5410+

5268+

1902

2A* Color

5249+

5258+

5260+

5248+

5259+

5257+

5270+

2C

2C

2C

VR2A-Steel: Standard

VR2A-F60: F17-F27-F60

VR2A-F63: F63-F64

VR2A-F65: F19-F65-F70

22

2279B

2279C

NR51:

VR5251, VR2279+B+C, VR2A

NR52:

VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A

NR64:

VR5251, VR2279+B+C, VR2A

VR3113:

VR3109, VR3110, VR5255

VR5250+:

VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260

VR5257+:

VR5257+, VR5259+

VR5258+:

VR5258+, VR5260+

VR5268+:

2xVR2C, VR1902, VR5268

VR5410+:

2xVR2C, VR5270+

5400V

5600V

2929

5400NV

5400TV

2930

5400FV

5400RV

2929

5400DV

2934

5003B

3x2001

5004B

3x2001, 001

5004L

3x2001, 001

2001

volà

Lunavej 2

DK-8700 Horsens

Tlf : + 45 7023 5500

sales@vola.com

www.vola.com

VOLA 5400V

5400FV, 5400NV

5400RV, 5400TV

5600V

Date

May 22

Rev.

5

Sheet

SB 10.54