




voilà




5 705230 287317

[illegible]



 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

PEX1

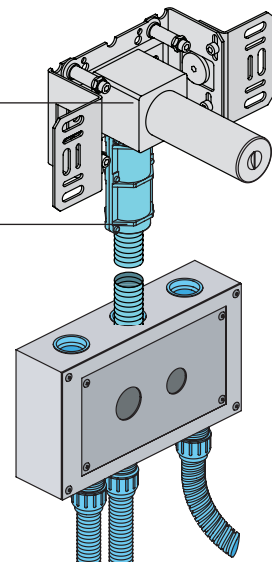

Y Min. 48 mm
Max. 110 mm

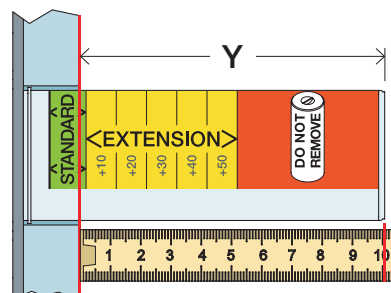


VR5250

An exploded view diagram of the VR5250 faucet assembly. The diagram shows various components including the handle, cartridge, and body. Red arrows indicate the assembly direction for several parts. Green recycling symbols are placed on the brass body and handle, indicating they are made of recycled material.



5400:
5600:

5400A3/A4:
5600A3/A4:

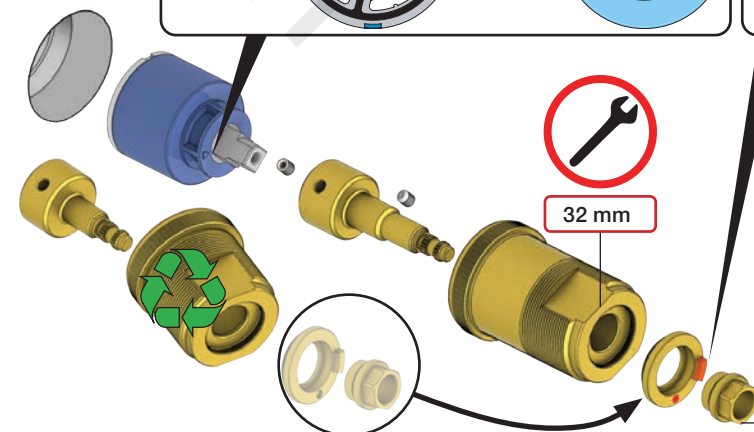



32 mm

2 mm


14 mm

X_{52 - 0 mm}


X_{-15 - 0 mm}



VR2019+, VR2119+

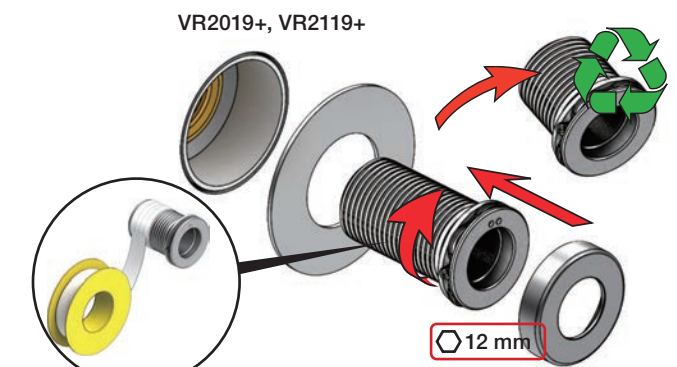

5400/5600: 5400A3/ 5600A3: 5400A4:

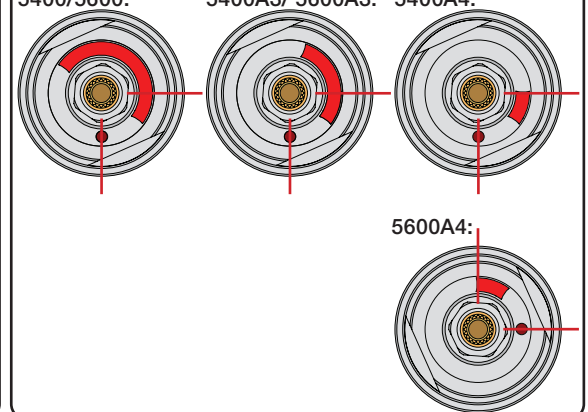

VR5411

32 mm

14 mm

