


VOLA 5100, 5100X, 5200V, 5300
VOLA 5400DV, 5400V, 5400NV & A3/A4
VOLA 5400TV, 5400FV, 5400RV & A3/A4
VOLA 5600V & A3/A4

Fitting instruction
Montageanleitung
Monteringsvejledning



Monteringsvægledning
Montage hanleiding
Manuel de montage

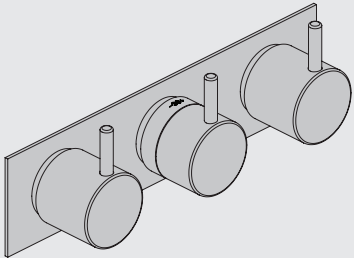

www.vola.com
5000_V4_40998504
04-01-2023

5 705230 287317

	L	L1	L2	H	H1	D
5400DV	377 mm 14 3/4"	260 mm 10"	268 mm 10"	95 mm 3 3/4"	186mm 7 3/8"	70 mm 2 3/4"
5100, 5200V, 5300, 5400V, 5600V	475 mm 19 3/4"	355 mm 14"	367 mm 14 1/2"			
5100X, 5400NV, 5400TV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			
5400FV, 5400RV	630 mm 25 1/2"	514 mm 20 3/8"	522 mm 20 1/2"			

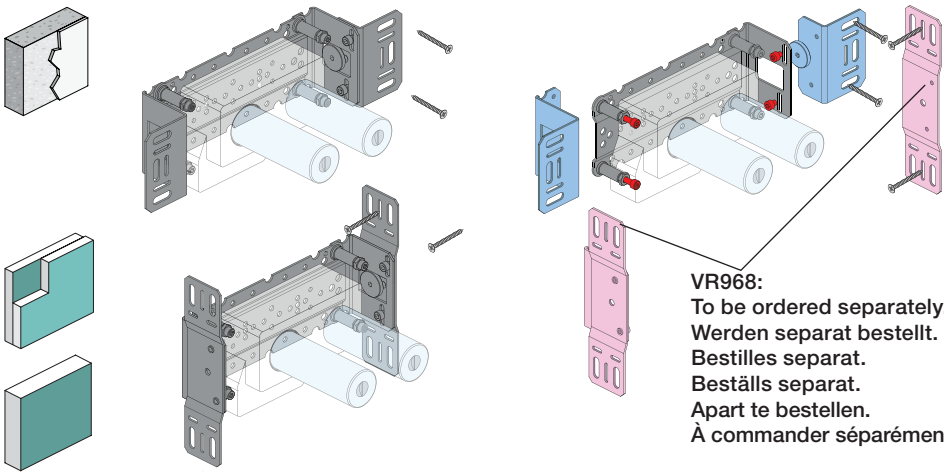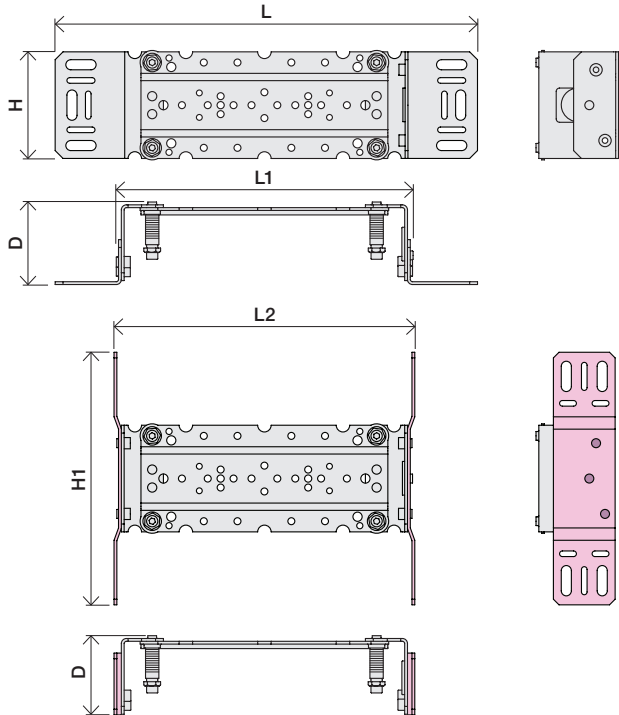

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
Max. 65°C, 150°F

USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:



5100/5200V/5300: **A** 5400/5600A3: **A** - **C**

5400/5600: **A** - **B** 5400/5600A4: **A** - **D**

AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

5400 5600	5400A3 5600A3	5400A4 5600A4							
-	2	1	2	1	2	1	2	1	2
-	3	4	3	4	3	4	3	4	3
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-	-	32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-	-	32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	-	-	32/(8.5)


B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

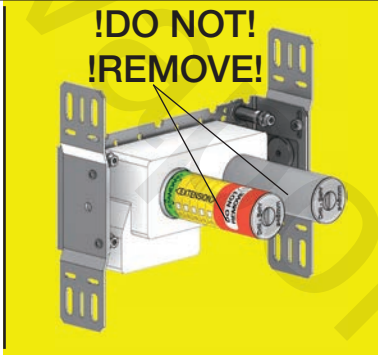

C DE: Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten


D Box till inbyggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

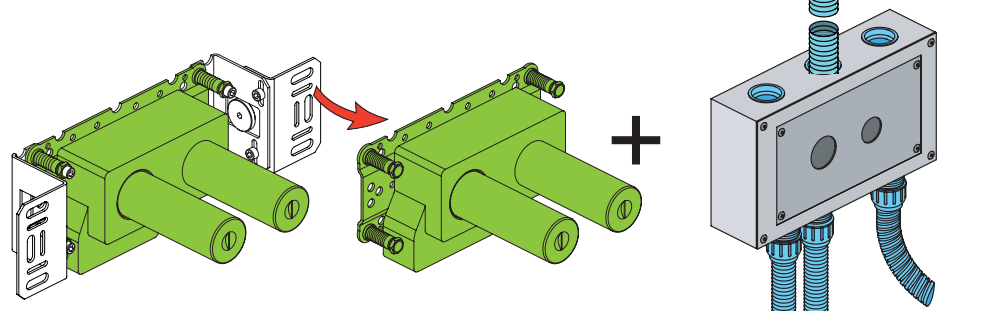


Extension
Verlängerung
Forlængerdele
Förlängning
Aanpassing
Modification

T Min. 3 mm
Max 65 mm



Y Min. 48 mm
Max. 110 mm

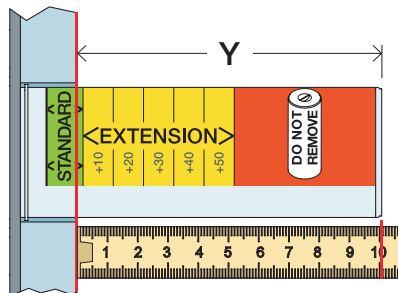


	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50



Fitting of extension
Montage von verlängerung

Montering af forlængerdele
Montering av förlängning

Montage van de verlengstukken
Montage des rallonges

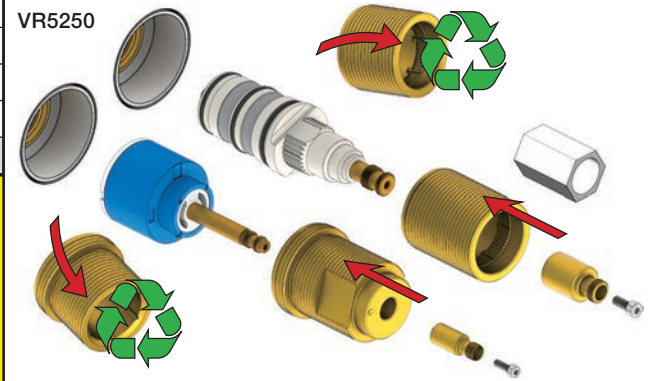


VR5410

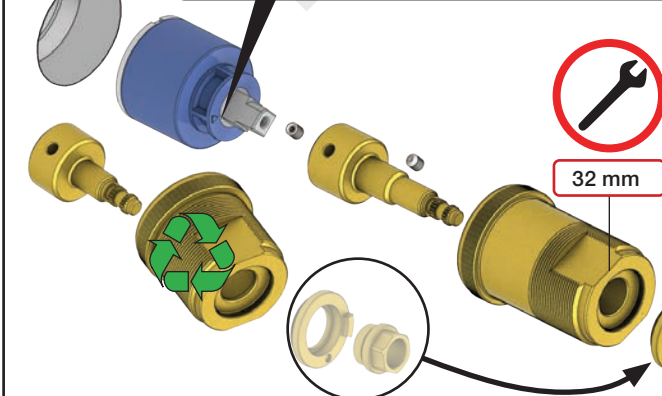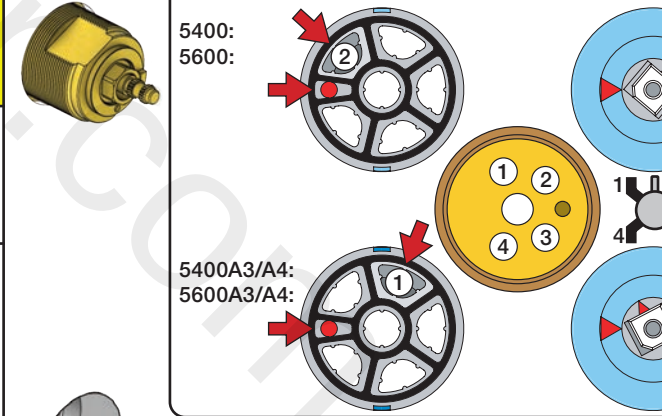


Extension, retrofit
Verlängerung, nachträglicher Einbau
Forlængerdele, eftermontering
Förlängning, eftermontering
Aanpassing na montage
Modification après installation


X 52 - 0 mm




X -15 - 0 mm



	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

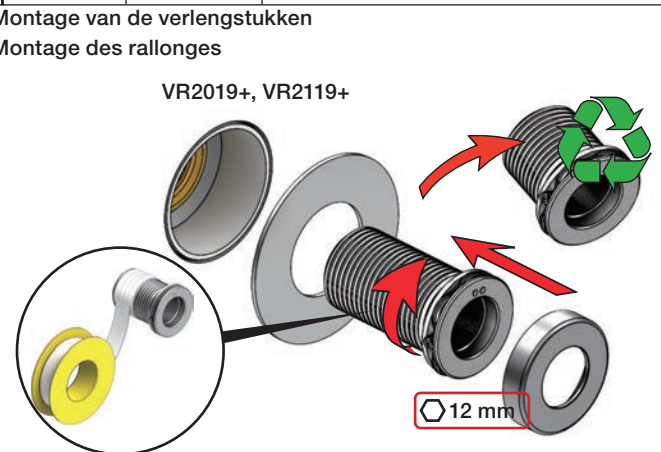

5400/5600: 5400A3/ 5600A3: 5400A4:

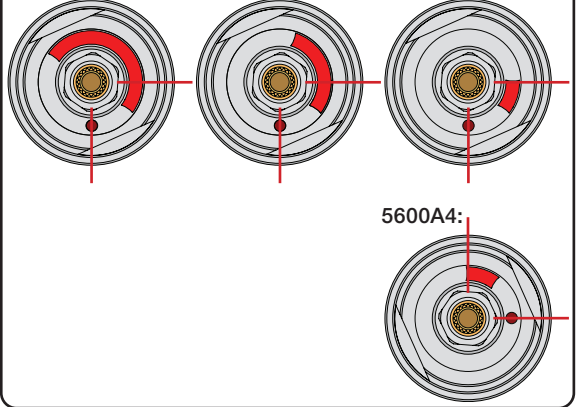



2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein








2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

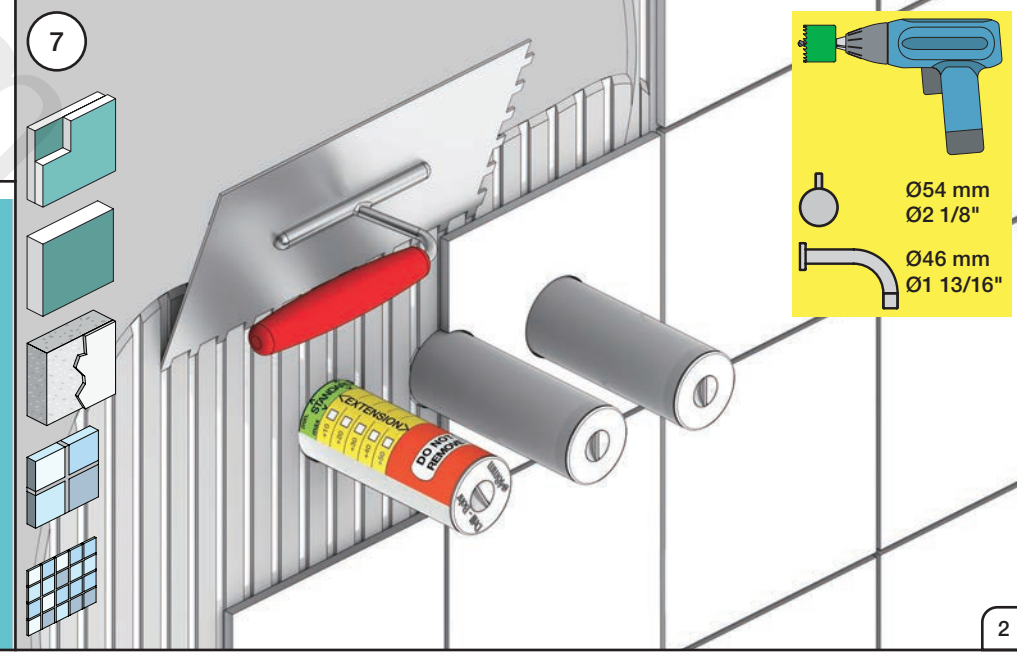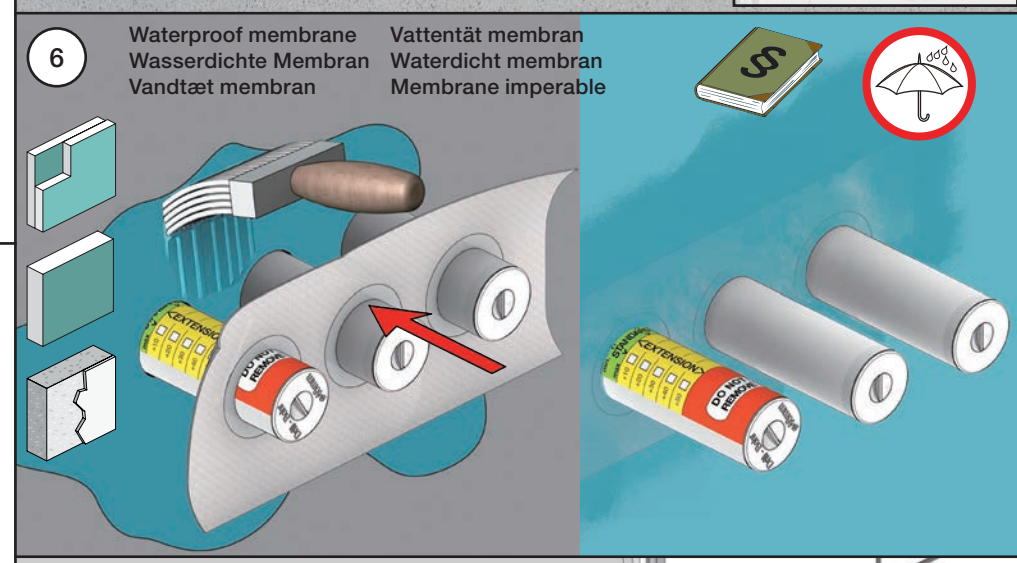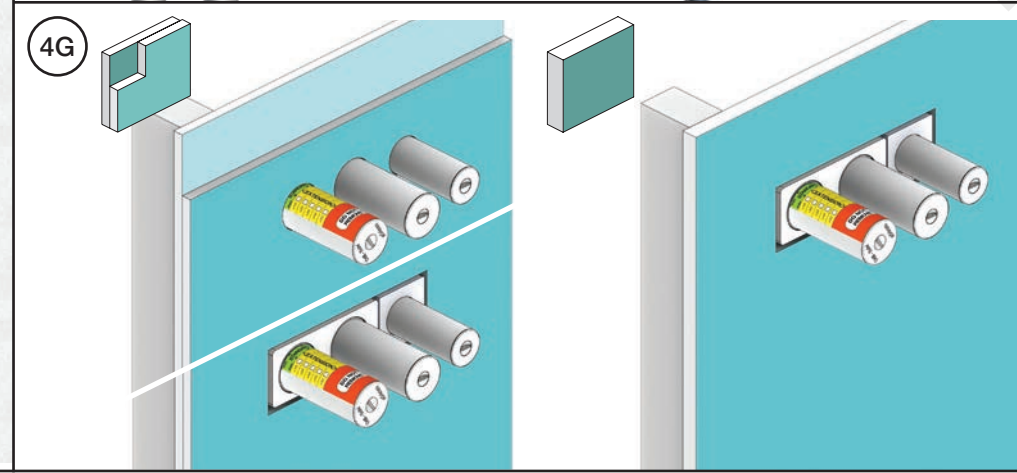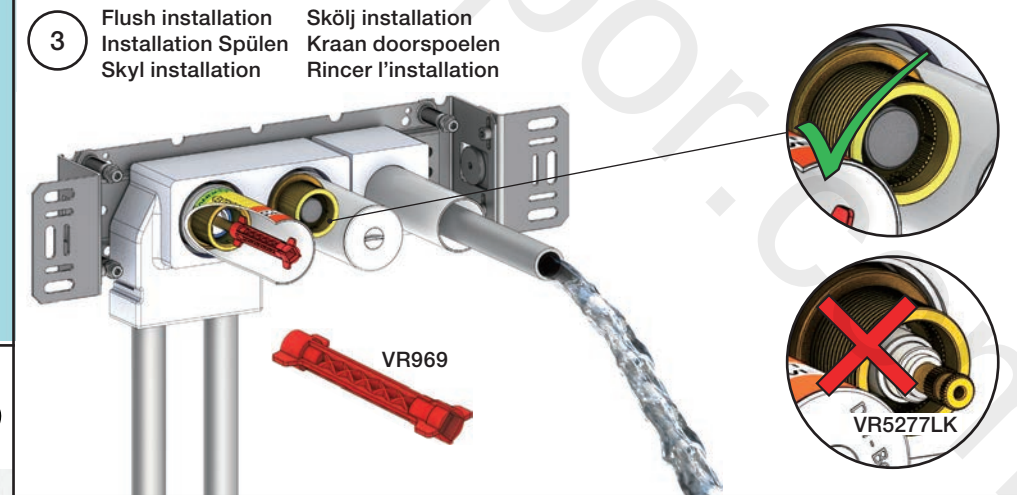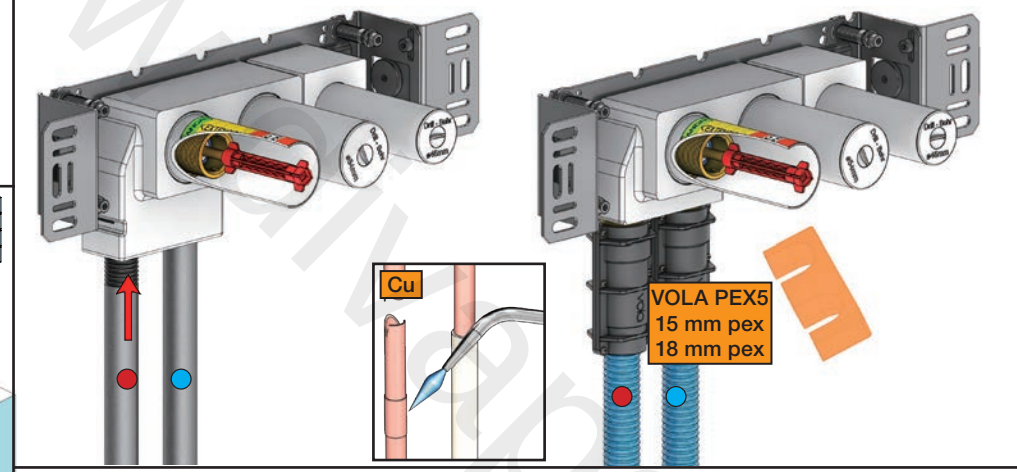

5400V

5250+

5410+

5268+

2A* Color

VR2A-Steel: Standard
 VR2A-F60: F17-F27-F60
 VR2A-F63: F63-F64
 VR2A-F65: F19-F65-F70

972 x8

2279B

2279C

NR51:

VR5251, VR2279+B+C, VR2A

NR52:

VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A

NR64:

VR5251, VR2279+B+C, VR2A

VR3113:

VR3109, VR3110, VR5255

VR5250+:

VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260

VR5257+:

VR5257+, VR5259+

VR5258+:

VR5258+, VR5260+

VR5268+:

2xVR2C, VR1902, VR5268

VR5410+:

2xVR2C, VR5270+

5400V 5600V 2929	5400NV 5400TV 2930	5400FV 5400RV 2929	5400DV 2934
5003B	5004B	5004L	
3x2001	3x2001, 001	3x2001, 001	2001

volà

Lunavej 2

DK-8700 Horsens

Tlf : + 45 7023 5500

sales@vola.com

www.vola.com

VOLA 5400V

5400FV, 5400NV

5400RV, 5400TV

5600V

Date

May 22

Rev.

5

Sheet

SB 10.54