

# BROOKHAVEN CROSS

## Deck Valves & Aqua Filler




Pack consists of:

1 x 34890MW.X Pair Deck Bath Valves

1 x 033 Low Pressure Aqua Filler  
with clic-clac waste


## BROOKHAVEN

Pair 1/2" deck bath valves

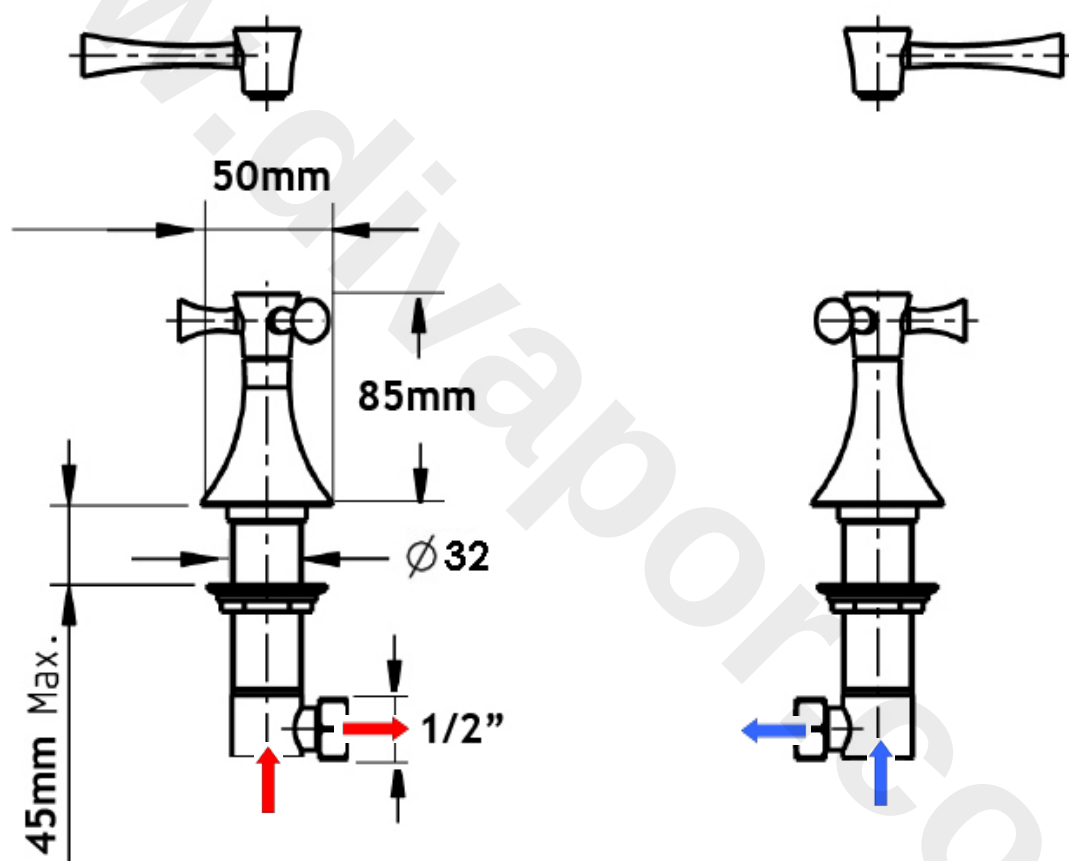

**Codes: 34890MW.L (lever)**  
**34890MW.X (cross)**

|    |                        |   |
|----|------------------------|---|
| 1  | Spline Extension       | 2 |
| 5  | Lever Handle           | 2 |
| 7  | Spline Extension Screw | 2 |
| 8  | Cross Handle           | 2 |
| 12 | Handle Set Screw       | 2 |
| 14 | Crown Bell             | 2 |

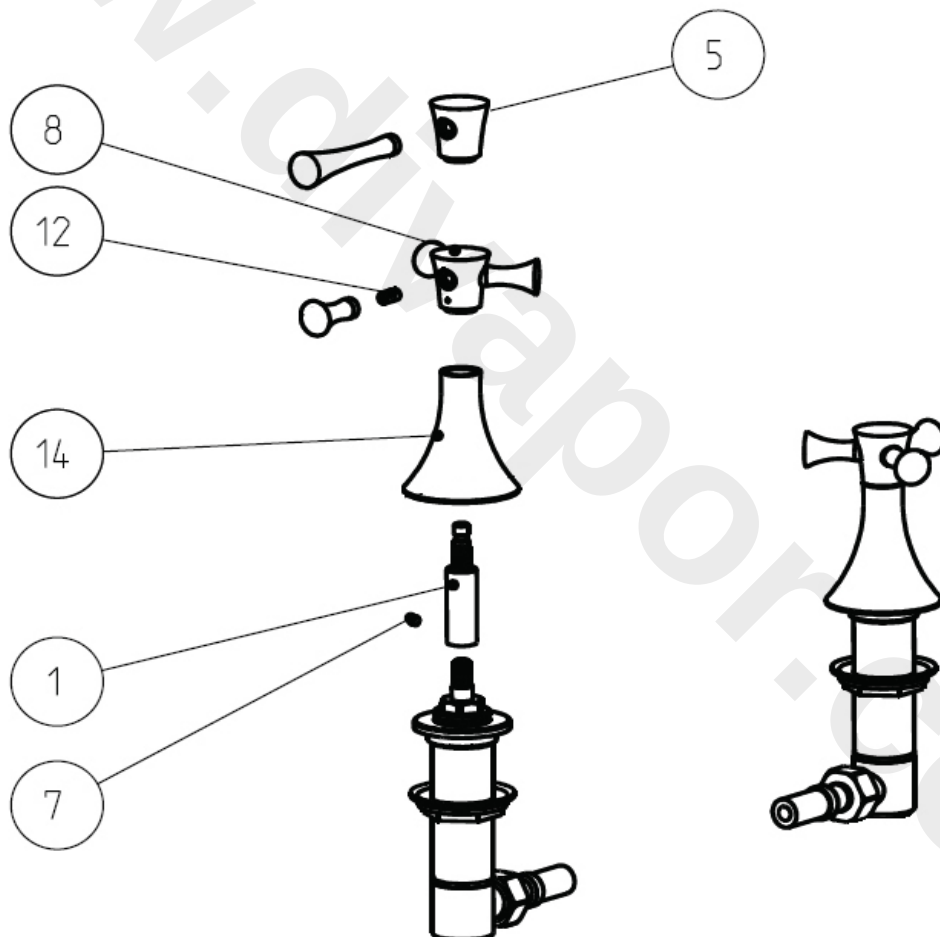


**CIFIAL**

[www.cifial.co.uk](http://www.cifial.co.uk)  
[cifialuk@btconnect.com](mailto:cifialuk@btconnect.com)



**with clic-clac waste**

- |    |                                           |
|----|-------------------------------------------|
| 14 | Rubber Seal                               |
| 15 | 1.25" BSP compression nut                 |
| 16 | Flexible overflow pipe                    |
| 17 | Flexible inlet hose                       |
| 18 | Overflow body                             |
| 19 | Rubber Overflow Seal                      |
| 20 | Overflow clamp plate / Nozzle body        |
| 21 | Overflow clamp plate screws               |
| 22 | Key Bolts (x2)                            |
| 23 | Overflow cover                            |
| 24 | Allen Hex Key for tightening              |
| 25 | Plastic Key for tightening                |
| 26 | Long ferrule (for use with thicker baths) |

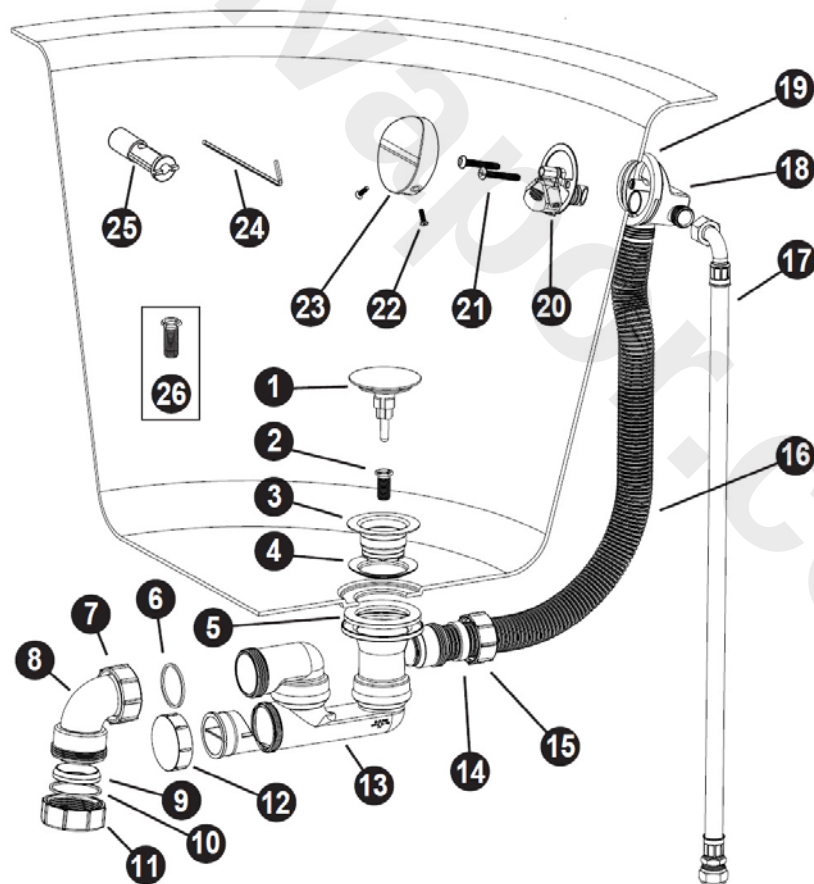


**www.cifial.co.uk**  
**cifialuk@btconnect.com**


**dimensions mm**

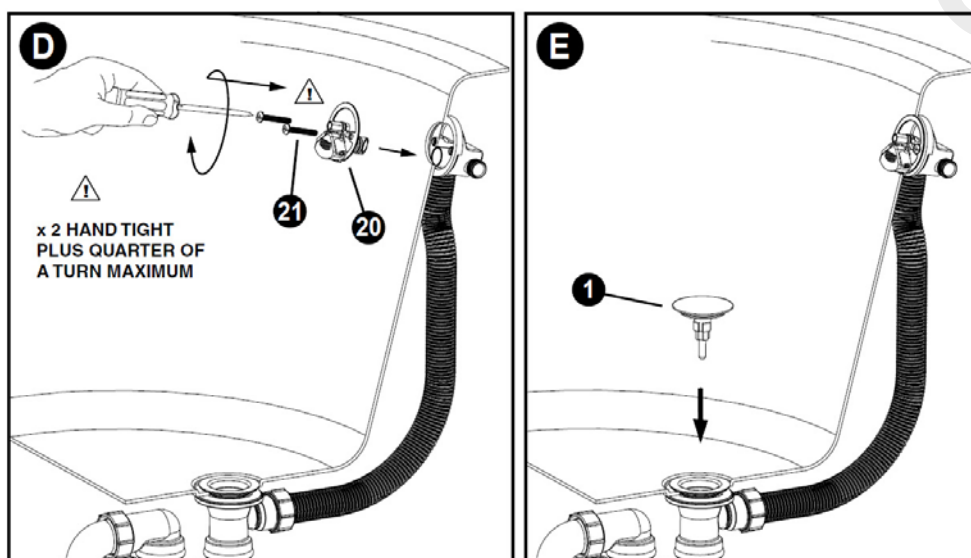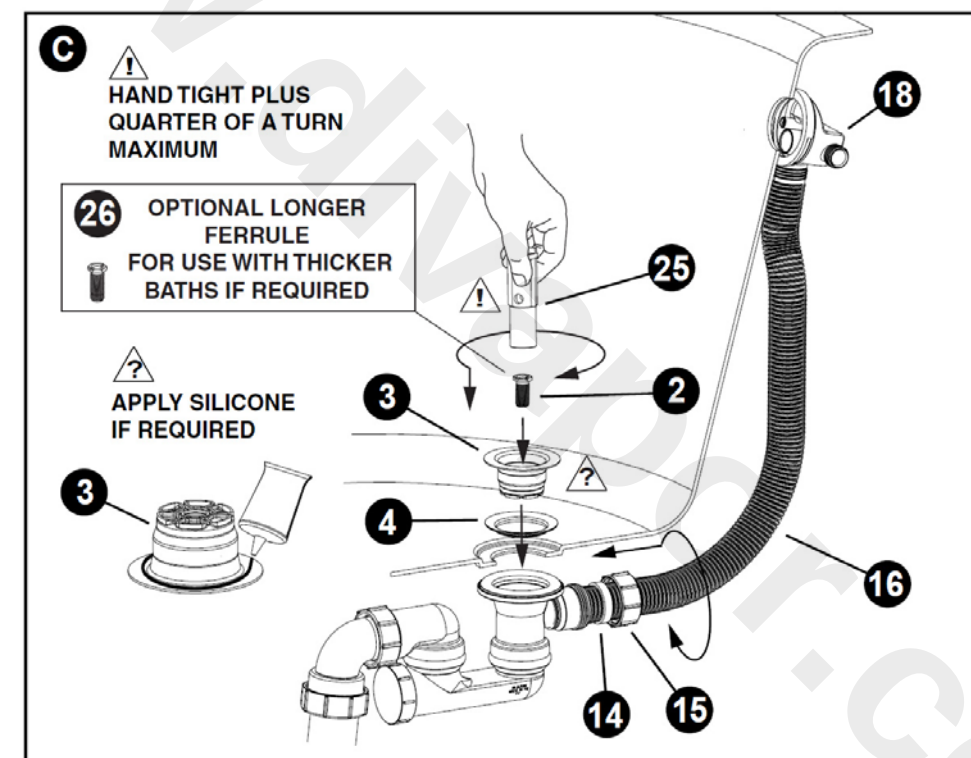

with clic-clac waste

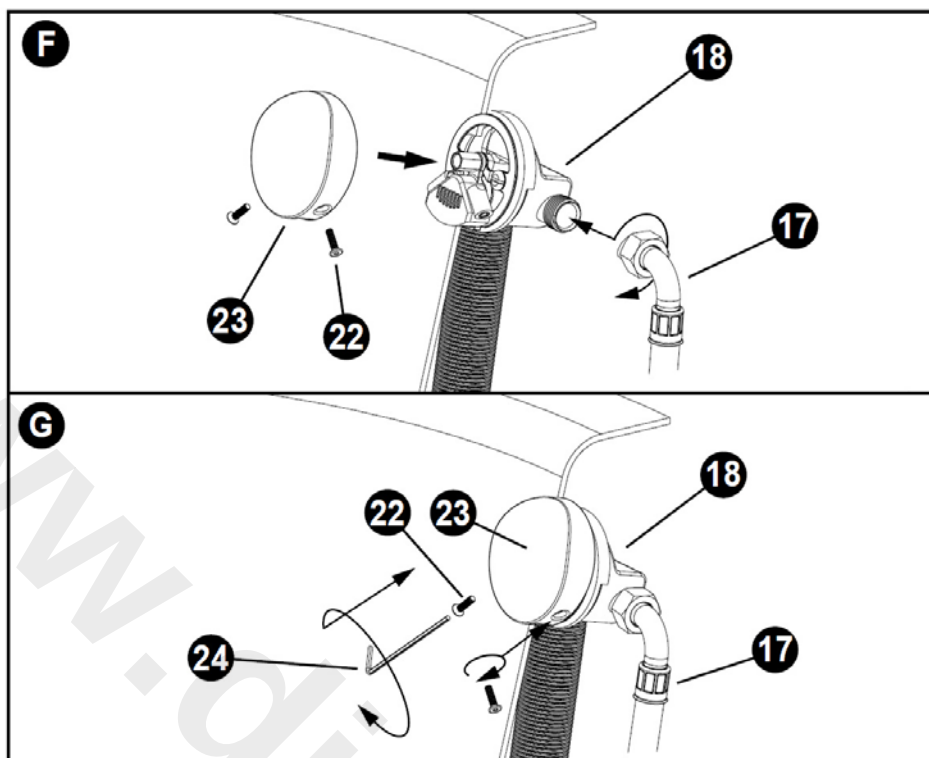

## FILL BATH & CHECK FULL ASSEMBLY FOR LEAKS

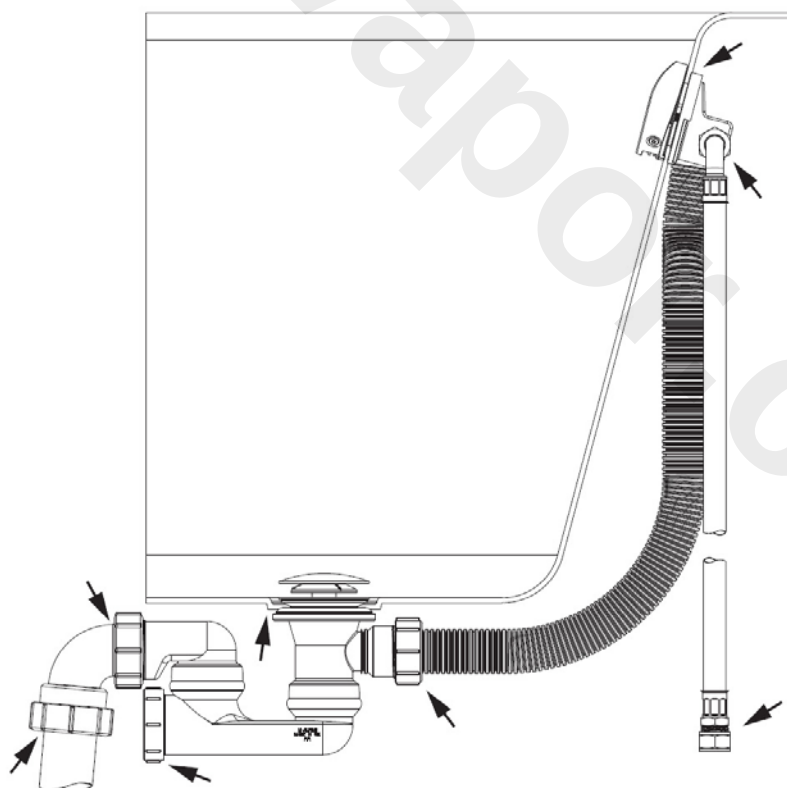

- Mixer valve (not supplied) must be installed according to manufacturers guidelines and Local authority regulations.
- Protection against pollution of potable water installations and general requirements of devices to prevent pollution by backflow as detailed in EN 1717 should be observed.
- Flexible inlet pipe should be installed in a self-draining position.