


VOLA 600, 700, 700V, 900, 1500  
VOLA 800, 800V, 800N, 800NV, 800T, 800TV  
VOLA S20V, S40V



Fitting instruction      Monteringsvægledning  
Montageanleitung      Montage hanleiding  
Monteringsvejledning      Manuel de montage



1500: GODKENDT TIL DRIKKEVAND

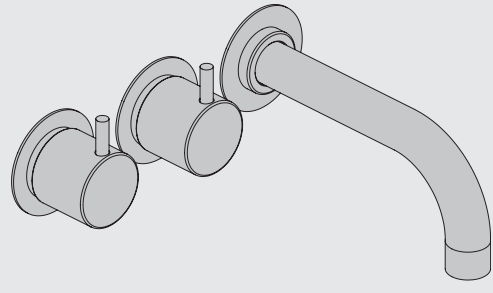

www.vola.com  
600\_V3\_40998507  
12-06-2023

5 705230 290027

|                       | L                 | L1               | L2                | H               | H1               | D               |
|-----------------------|-------------------|------------------|-------------------|-----------------|------------------|-----------------|
| S20V                  | 276 mm<br>10 7/8" | 160 mm<br>6 1/4" | 168 mm<br>6 5/8"  | 95 mm<br>3 3/4" | 186 mm<br>7 3/4" | 70 mm<br>2 3/4" |
| S40V, 900             | 377 mm<br>14 3/4" | 260 mm<br>10"    | 268 mm<br>10"     |                 |                  |                 |
| 600, 700V, 800V, 1500 | 475 mm<br>18 3/4" | 355 mm<br>14"    | 367 mm<br>14 1/2" |                 |                  |                 |
| 80NV, 800TV           | 552 mm<br>21 3/4" | 435 mm<br>17"    | 447 mm<br>17 5/8" |                 |                  |                 |

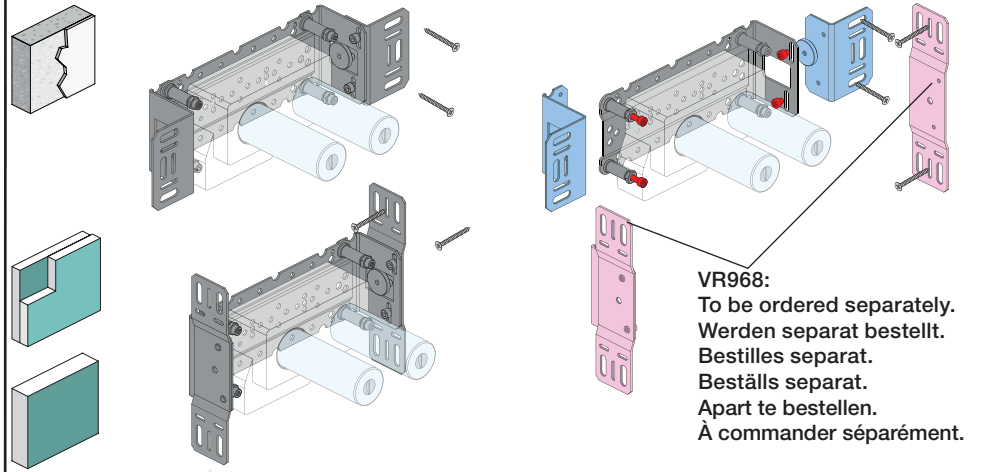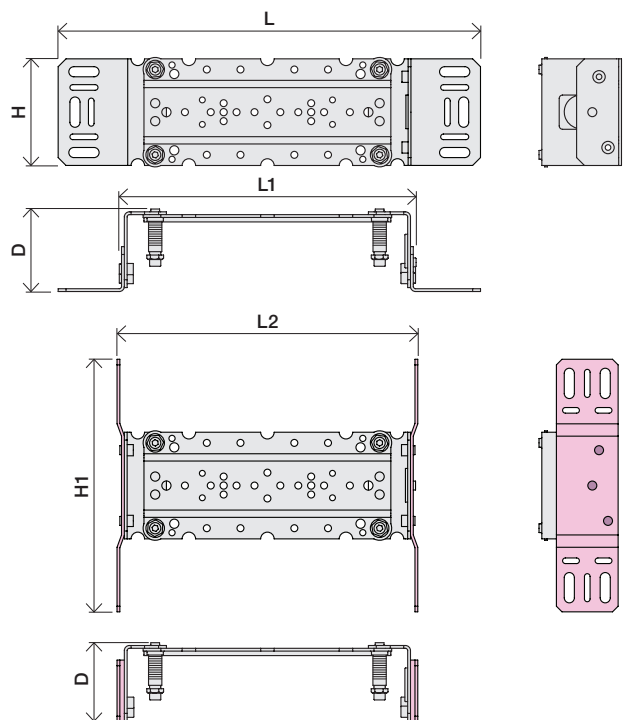

VR968:  
To be ordered separately.  
Werden separat bestellt.  
Bestilles separat.  
Apart te bestellen.  
À commander séparément.

|          |                      |                              |          |
|----------|----------------------|------------------------------|----------|
| <b>A</b> | Max.: 10 Bar/145 psi | <b>Data, 3 Bar/43.5 Psi:</b> |          |
|          | Max. 65°C, 150°F     | Max: l/min.                  | Gal/min. |
|          |                      | 600: 65                      | 17.2     |
|          |                      | 700V: 65                     | 17.2     |
|          |                      | 800V: 34                     | 9.0      |
|          |                      | 900: 30                      | 8.0      |
|          |                      | 1500: 65                     | 17.2     |

**Data, l/min. / (Gpm) 3 Bar/43.5 Psi:**

**B** Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.

**!DO NOT!  
!REMOVE!**

**C** DE:  
Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten

**D**


Box till inbyggnadsblandare.  
Boks til indbyggningsblander.  
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.  
Ikke inkludert, kjøpes separat.  
Eivät sisälly tilaukseen, ostettava erikseen.

Extension  
Verlängerung  
Forlængerdele  
Förlängning  
Aanpassing  
Modification

|     |     |     |
|-----|-----|-----|
| STD | +10 | +20 |
| +30 | +40 | +50 |


VR697      600, 700V, 800V: 2xVR697  
VR698      1500: 1xVR697+1xVR698  
              900: 1xVR697

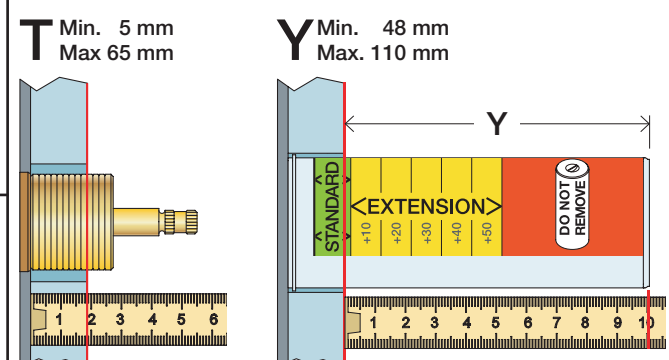

|  | T          | Y           | VR697/VR1400/VR2019 |
|--|------------|-------------|---------------------|
|  | 5 - 15 mm  | 110 - 98 mm | Std.                |
|  | 15 - 25 mm | 98 - 88 mm  | +10                 |
|  | 25 - 35 mm | 88 - 78 mm  | +20                 |
|  | 35 - 45 mm | 78 - 68 mm  | +30                 |
|  | 45 - 55 mm | 68 - 58 mm  | +40                 |
|  | 55 - 65 mm | 58 - 48 mm  | +50                 |

Fitting of extension  
Montage von verlängerung  
Montering af forlængerdele  
Montering av förlängning

Extension, retrofit  
Verlängerung, nachträglicher Einbau  
Forlængerdele, eftermontering  
Förlängning, eftermontering  
Aanpassing na montage  
Modification après installation

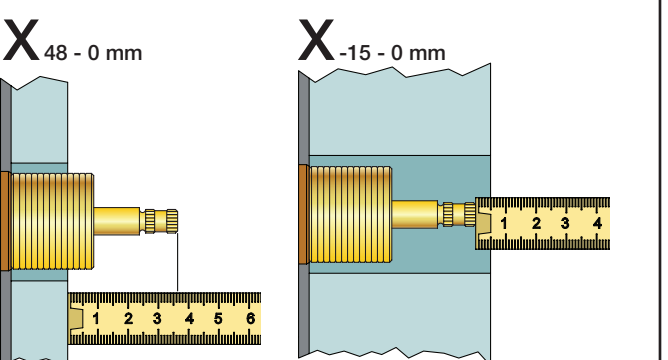


|  | X           | VR697/VR1400/VR2019 |
|--|-------------|---------------------|
|  | 36 - 50 mm  | Std.                |
|  | 26 - 36 mm  | +10                 |
|  | 16 - 26 mm  | +20                 |
|  | 6 - 16 mm   | +30                 |
|  | -4 - 6 mm   | +40                 |
|  | -14 - -4 mm | +50                 |

Montage van de verlengstukken  
Montage des rallonges


VR697+      VR2019+, VR2119+

VR1400+      400-2400

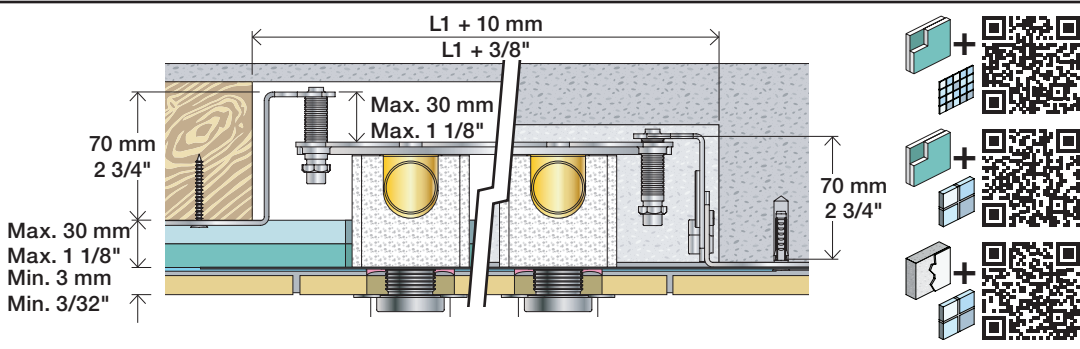

**2x13 mm** Lightweight wall  
Leichtwand  
Let væg


Lätta konstruktion  
Holle wandconstructie  
Construction légère

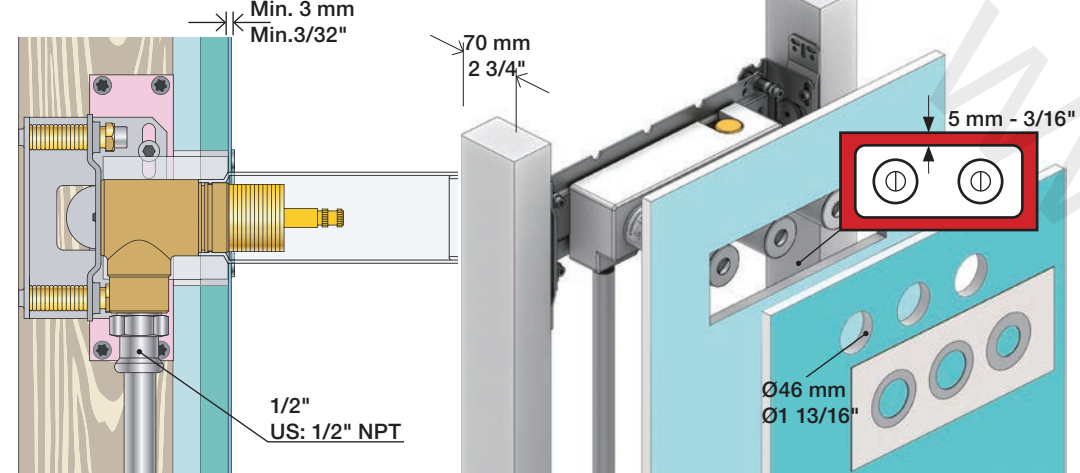

**1x15 mm**  
**1x18 mm**  
**1x20 mm**  
**2x13 mm**


Lightweight wall  
Leichtwand  
Let væg

Lätta konstruktion  
Holle wandconstructie  
Construction légère

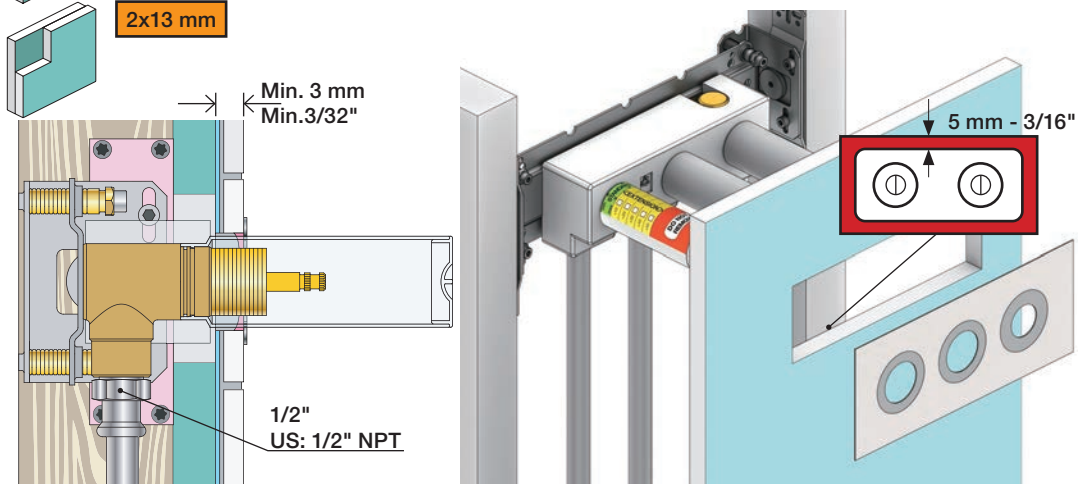

**Masonry**  
**Mauerwerk**  
**Murværk**

**Murverk**  
**Massieve wand**  
**Mur Plein**







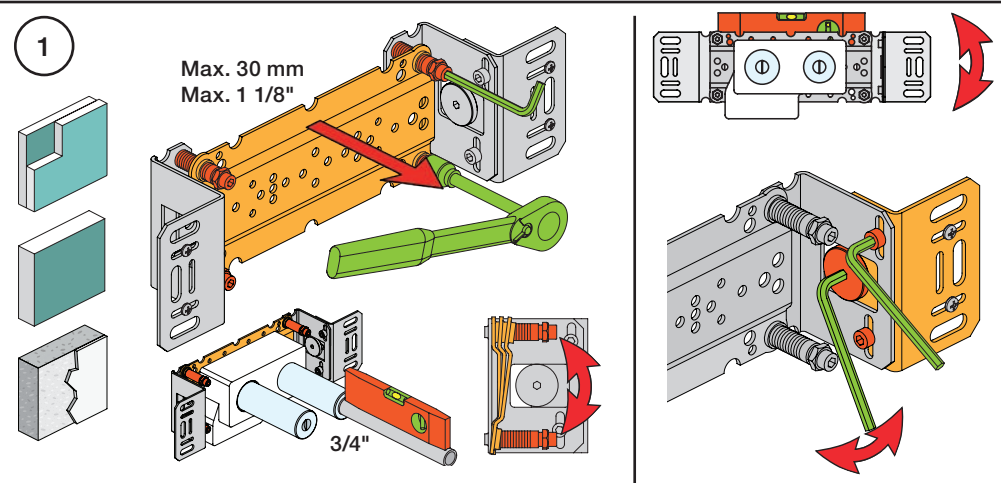


**2** Test Pressure  
Prüfdruck  
testtryk  
Test tryck  
Test druk  
test de pression

Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter.  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.

**1. MAX. 16 Bar 232 Psi**  
**2. MAX. 4 Bar 58 Psi**

**! Water - Wasser - Vand - Vatten - Water - L'eau**  
**! MAX 1 Minute - Minut - Minuut !**

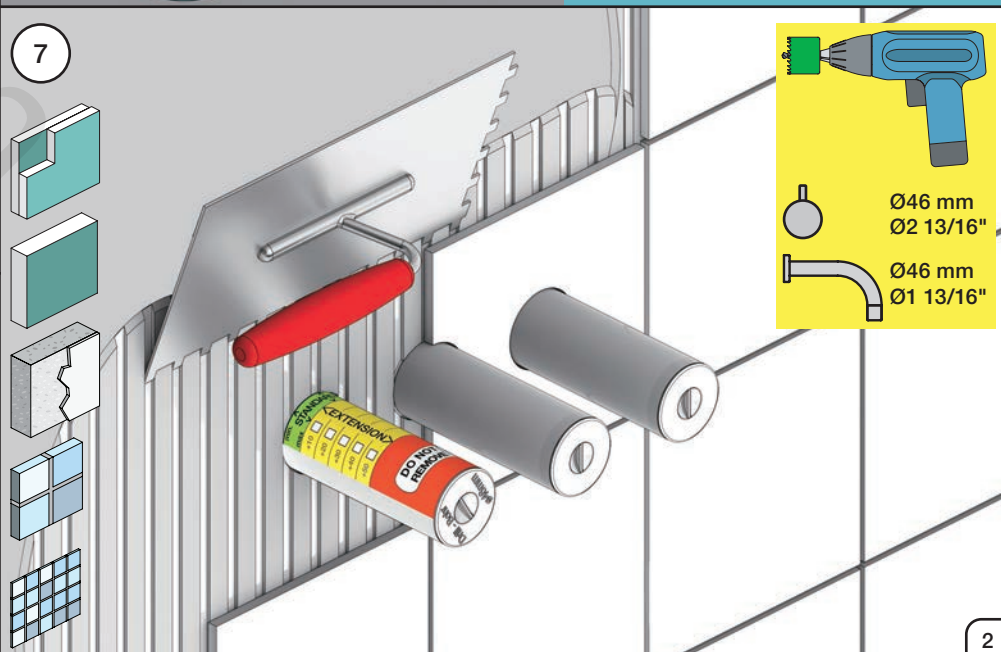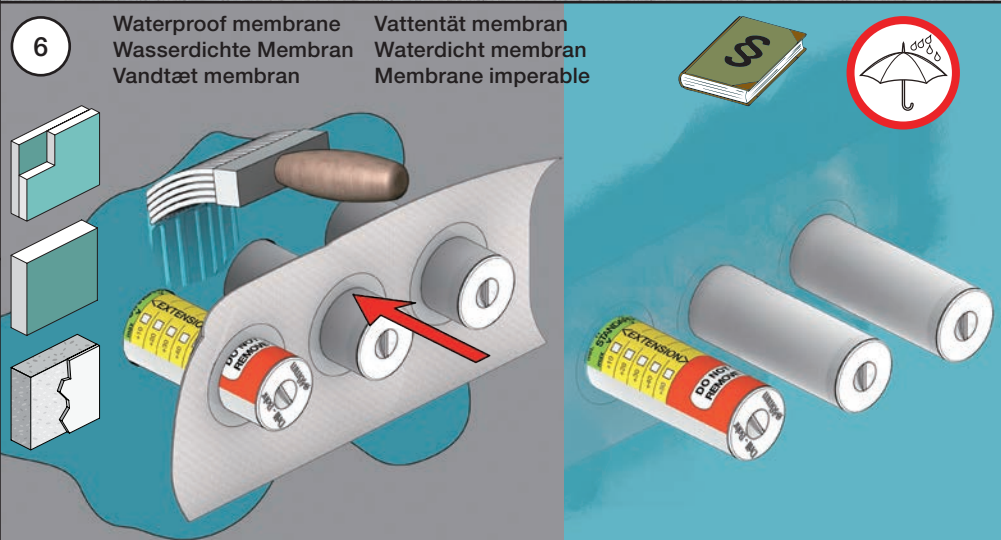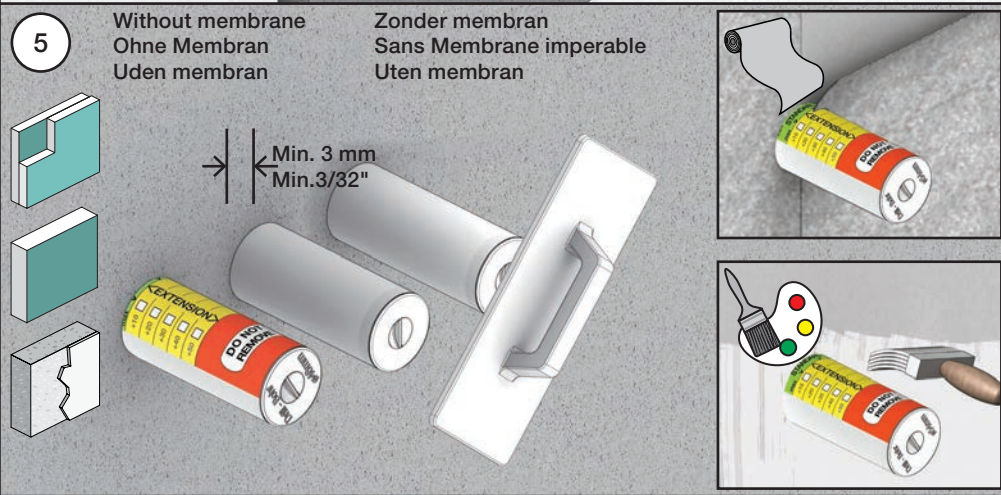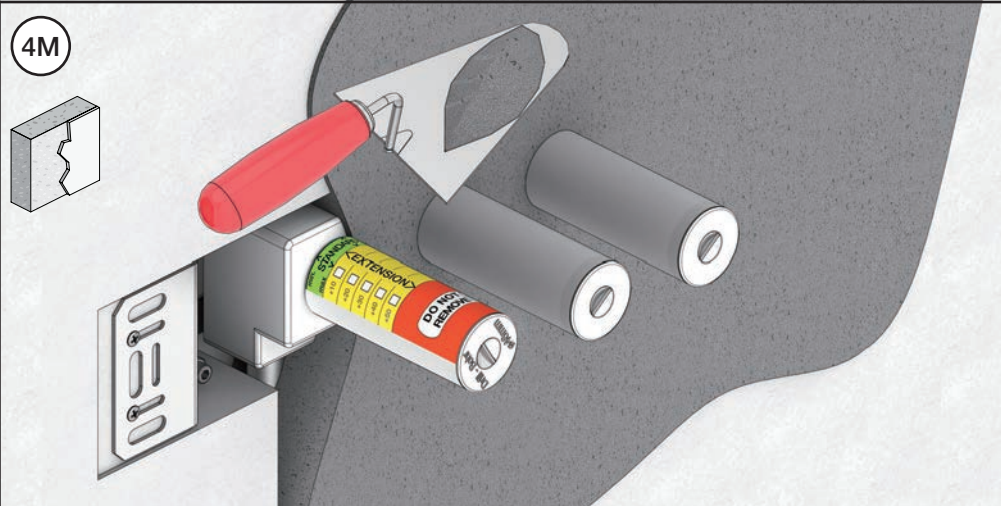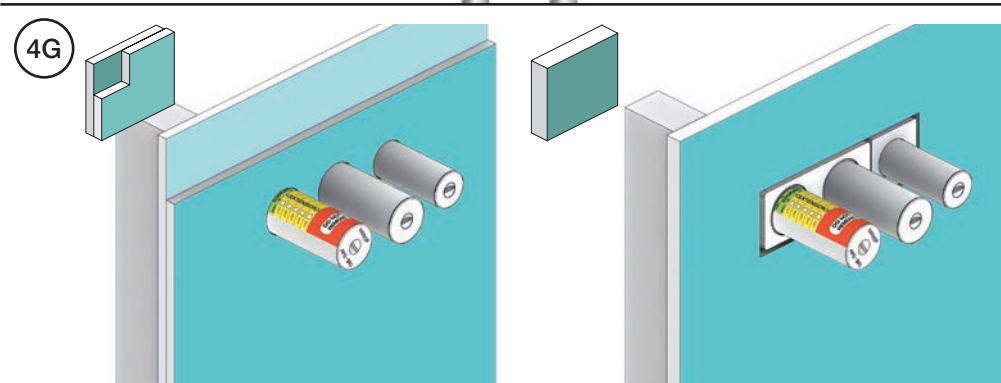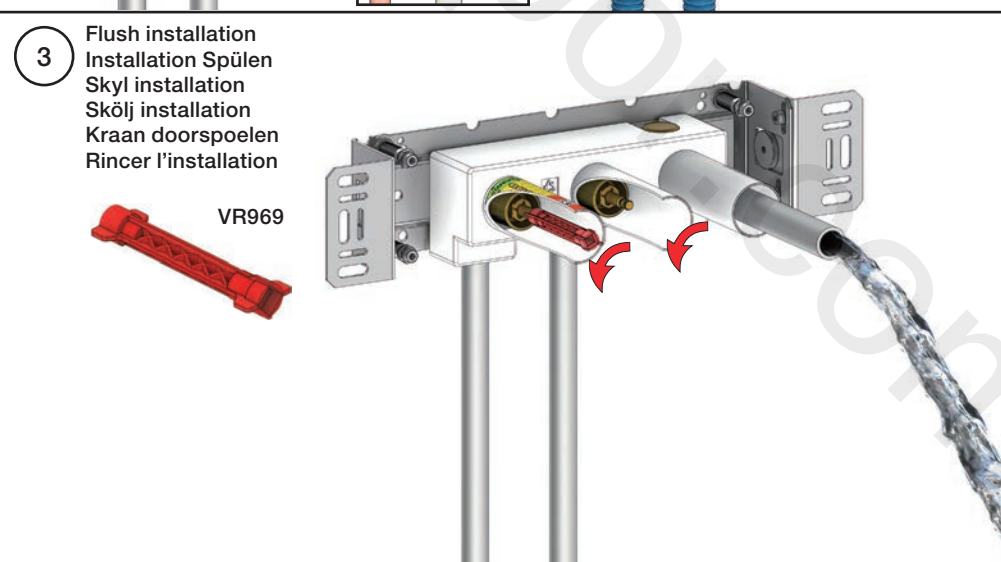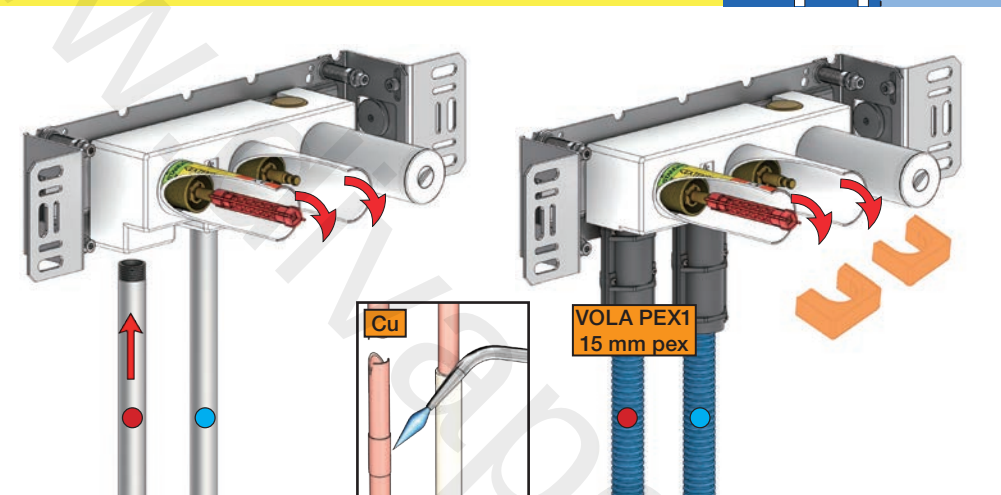


**VOLA 010, 020, 030, 040**  
**VOLA 010C, 020C, 040D**

Fitting instruction  
 Montageanleitung  
 Monteringsvejledning  
 Monteringsvægledning  
 Montage hanleiding  
 Manuel de montage




**010, 020**


**010C, 020C**

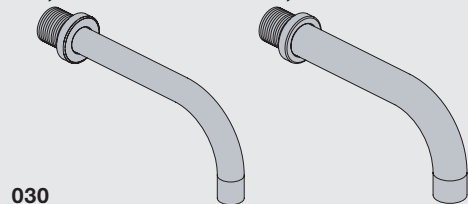


**030**

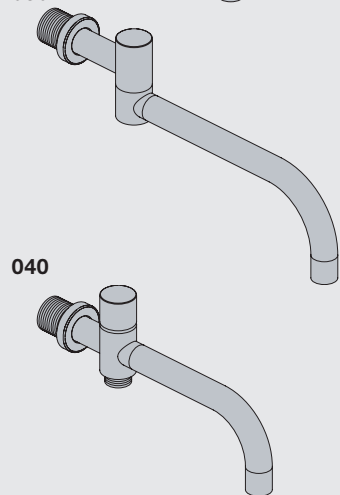

**040**

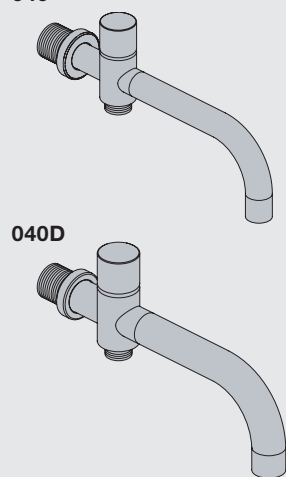

**040D**



www.vola.com

mnt\_010\_V1\_40998360  
 08-08-2022



| Standard Flow data: |           | Max.                     |
|---------------------|-----------|--------------------------|
| 010/020             | (l/min)   | 5.0                      |
|                     | (Gal/min) | 1.3                      |
| 010C/020C           | (l/min)   | 30                       |
|                     | (Gal/min) | 7.9                      |
| 030                 | (l/min)   | 9.0                      |
|                     | (Gal/min) | 2.0                      |
| 040                 | (l/min)   | 25                       |
|                     | (Gal/min) | 6.6                      |
| 040D                | (l/min)   | 30                       |
|                     | (Gal/min) | 7.9                      |
|                     |           | Max. 65°C.<br>Max. 150°F |



**VR161:**

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min




For more water saving possibilities please see:  
 Weitere Wassersparmöglichkeiten finden Sie auf:  
 For flere vandbesparende muligheder se venligst:  
 För mer vattenbesparande möjligheter hänvisas till:  
 Voor meer waterbesparende mogelijkheden zie:  
 Pour plus d'informations sur les options : économie d'eau, voir le site:


[www.vola.com](http://www.vola.com)



**010, 020**


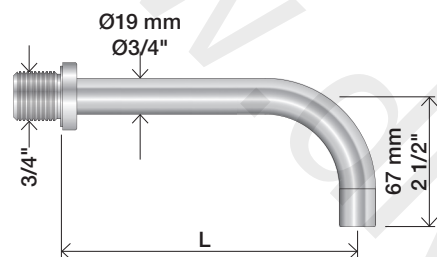


**010C, 020C**

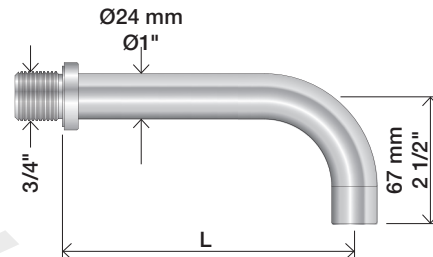


|            | L (mm) | L (Inch) |
|------------|--------|----------|
| 010(C)/100 | 100    | 4"       |
| 010(C)/130 | 130    | 5"       |
| 010(C)/160 | 160    | 6"       |
| 020(C)/200 | 200    | 7 3/4"   |
| 020(C)/225 | 225    | 8 3/4"   |
| 020(C)/260 | 260    | 10 1/4"  |
| 020(C)/300 | 300    | 11 3/4"  |

**030**

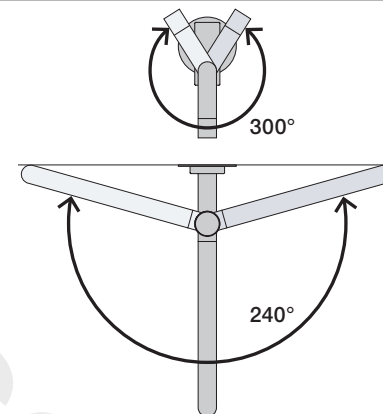
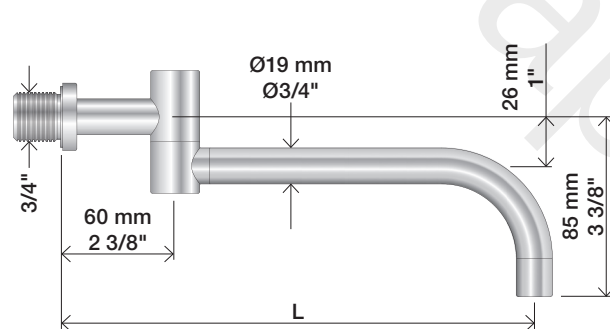


|         | L (mm) | L (Inch) |
|---------|--------|----------|
| 030/200 | 200    | 7 3/4"   |
| 030/250 | 250    | 9 3/4"   |
| 030/300 | 300    | 11 3/4"  |
| 030/350 | 350    | 13 3/4"  |

**040**

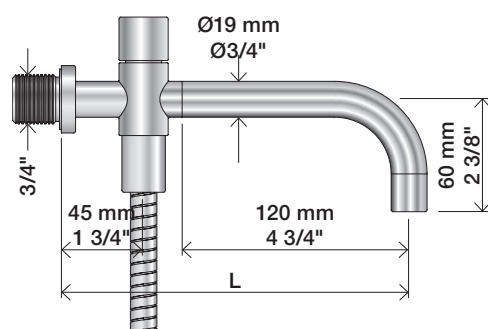


**040D**

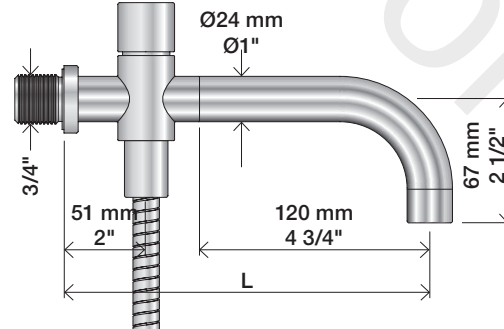

|          | L (mm) | L (Inch) |
|----------|--------|----------|
| 040      | 185    | 7 3/4"   |
| 040D     | 200    | 7 3/4"   |
| 040D/250 | 250    | 9 3/4"   |
| 040D/300 | 300    | 11 3/4"  |

1

010, 010C, 020, 020C, 030, 040, 040D

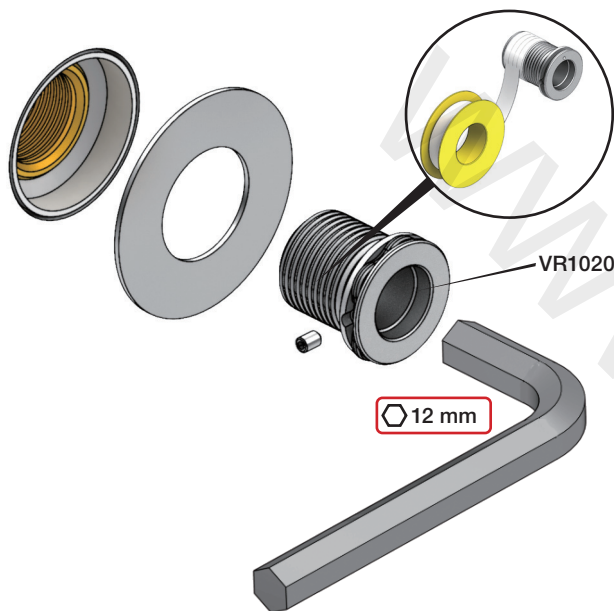

2






3

Ø19: 010, 020, 030, 040




Ø24: 010C, 020C, 040D

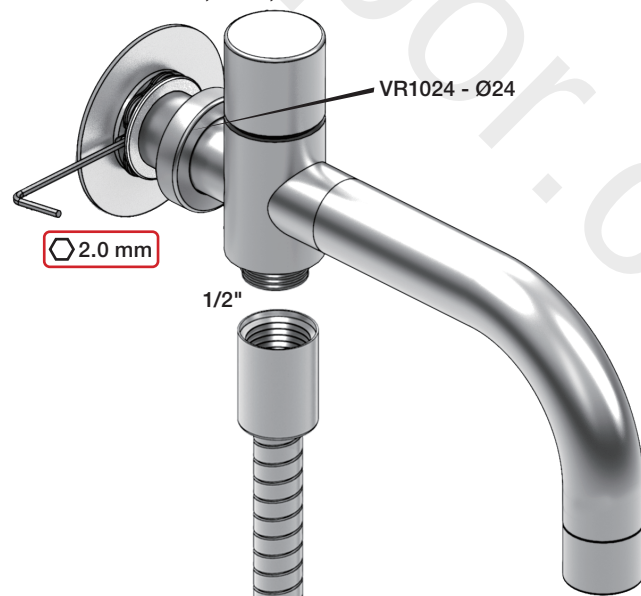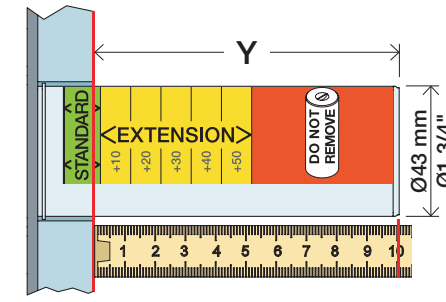Extension  
VerlängerungForlængerdele  
FörlängningVerlengstücken  
ModificationT Min. 3 mm  
Max. 65 mmY Min. 48 mm  
Max. 110 mm


| T          | Y           | VR2019 (Ø19)<br>VR2119 (Ø24) |
|------------|-------------|------------------------------|
| 3 - 15 mm  | 110 - 98 mm | Std.                         |
| 15 - 25 mm | 98 - 88 mm  | +10                          |
| 25 - 35 mm | 88 - 78 mm  | +20                          |
| 35 - 45 mm | 78 - 68 mm  | +30                          |
| 45 - 55 mm | 68 - 58 mm  | +40                          |
| 55 - 65 mm | 58 - 48 mm  | +50                          |

VR2019+/VR2219+

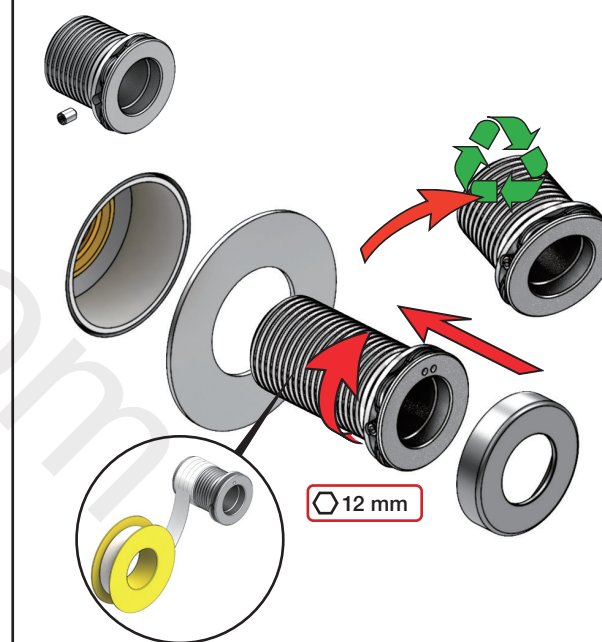


Do not cut the membrane  
Die Membran nicht schneiden  
Skær ikke membranen  
Skär inte membranet  
Snij het membraan niet door  
Ne coupez pas la membrane  
No cortar la membrana


NR 17



NR 17 - 1

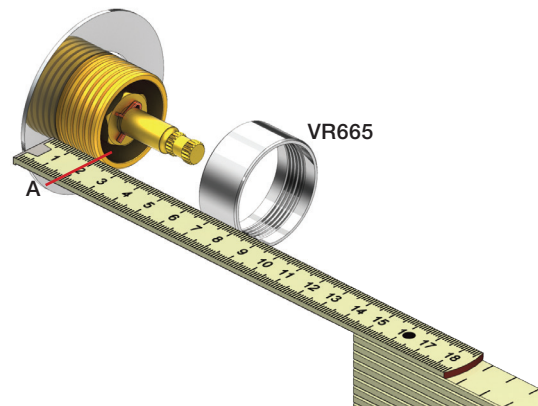

NR 17 - 2

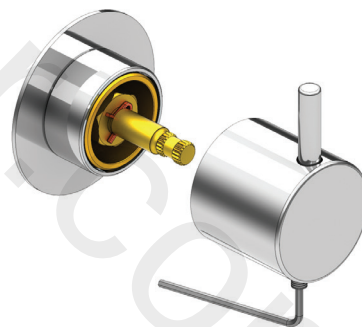

2 mm



1

NR.17:


1

NR.19:


2

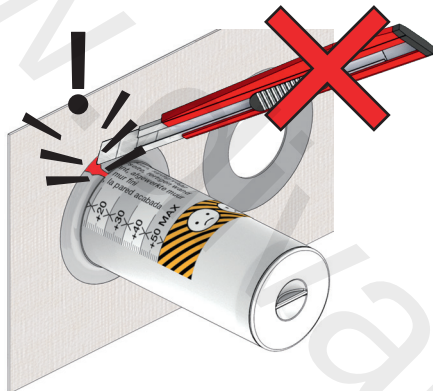


NR 19




NR 19 - 1



NR 19 - 2


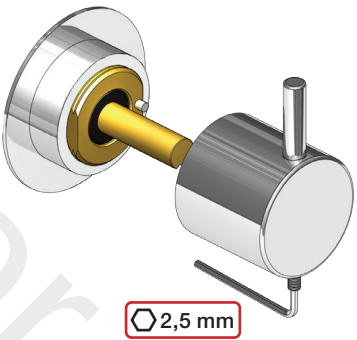


600

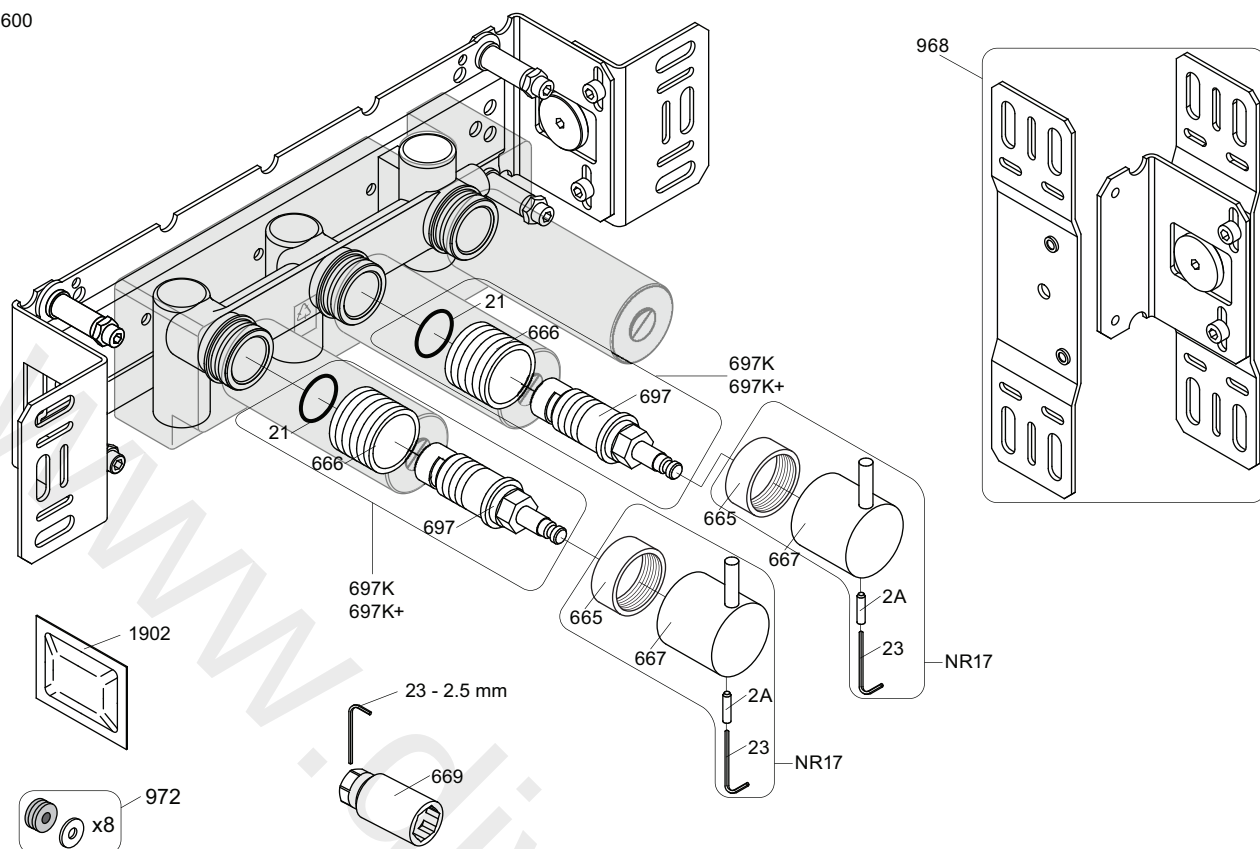

NR17: VR2A, VR23, VR665, VR667  
 VR697K: VR21, VR23, VR666, VR669, VR697

900


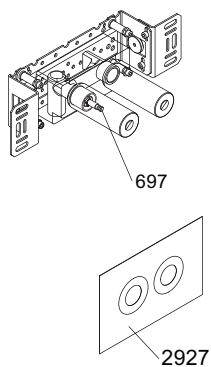


002



001, 001G

700V


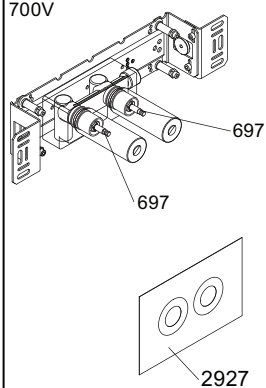


1034




2x001G


600

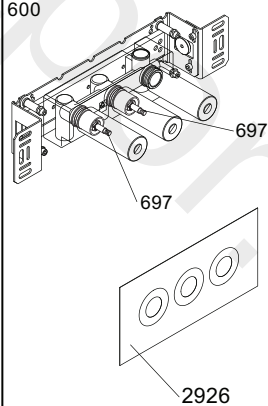

003K



001, 2x001G




**voila**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@voila.com  
 www.voila.com

**VOLA 600**  
 700V, 900, 1500


Date  
 May. 22

Rev.  
 4

Sheet  
 SB 5.3

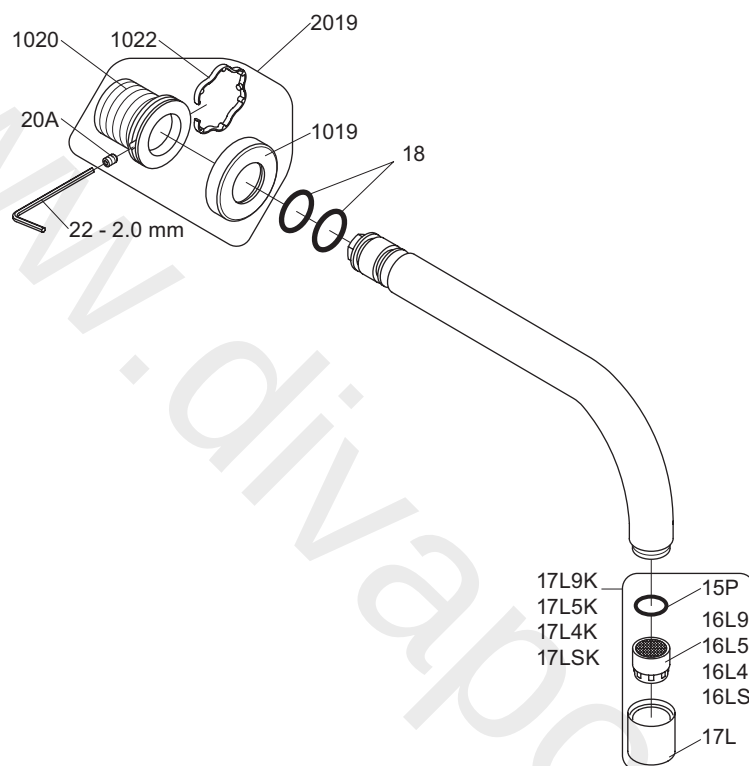

VR17L9K: VR15P, VR16L9, VR17L  
 VR17L5K: VR15P, VR16L5, VR17L  
 VR17L4K: VR15P, VR16L4, VR17L (US Standard)  
 VR17LSK: VR15P, VR16LS, VR17L  
 VR1020K: VR20A, VR22, VR1020, VR1022  
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



**vola**

Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

**VOLA 010 / 020**

Date  
 Apr. 21

Rev.  
 3

Sheet  
 SB11