


CERATHERM T25

Shower system with exposed thermostatic mixer

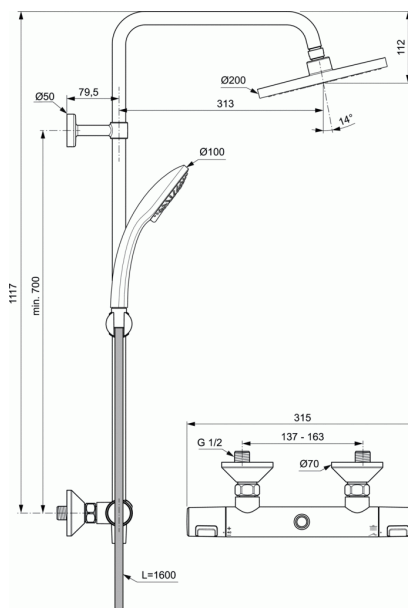

Shower system with exposed thermostatic mixer

- Ceratherm T25 exposed shower thermostatic mixer
 - Standard S-connectors
 - IS Thermostatic cartridge new technology
 - Ceramic valve G1/2 180°
 - Cool body technology
 - Plastic handles with hot water at 40°C stop button and 50% water volume stop button
 - Non return valve
 - Plastic shower head Ø200 mm with 12 l/min water flow limiter
 - 100 mm 3F Idealrain hand shower with 8 l/min water flow limiter
 - Vertically adjustable wall bracket for fixation to the wall
 - 1600 mm Idealflex shower hose
- Comply with EN 1111

Optional equipment:

- Riser rail extension 150 mm A861379AA
- Riser rail extension 300 mm A861380AA

FINISHES*



* AA = Chrome