


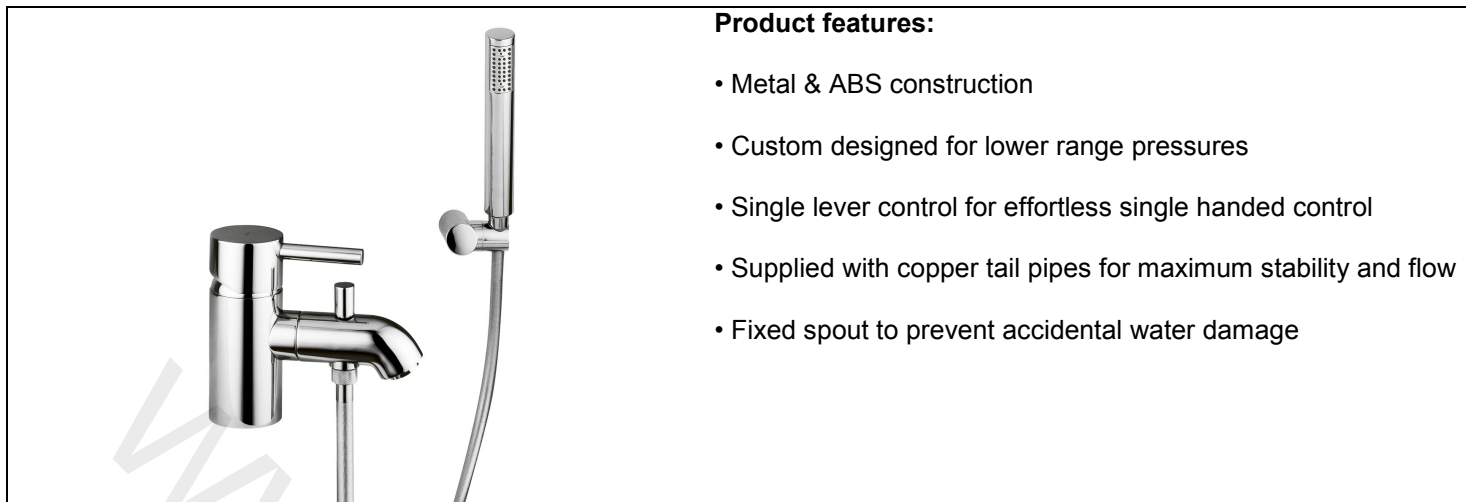

Product features:

- Metal & ABS construction
- Custom designed for lower range pressures
- Single lever control for effortless single handed control
- Supplied with copper tail pipes for maximum stability and flow
- Fixed spout to prevent accidental water damage

Packaged properties:


Box length (mm): 270 Box depth(mm): 155
Box width(mm): 235 Boxed weight (Kg): 3.9

Includes pop up waste?: No

Additional comments:

Includes pencil showerhead & fixed bracket

Product dimensions:

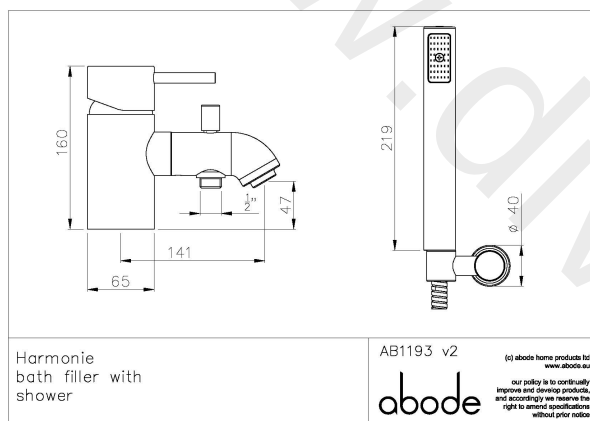


- Product mounted where: Surface
- Recommended hole size: 35 mm
- Overall Height / projection: 160 mm
- Exit reach: 141 mm
- Exit height: 47 mm
- Base size: 65 mm

• Inlet centre distance(s):

- Min. fitting depth required: 85 mm
- Max. surface depth:

Product flow characteristics:

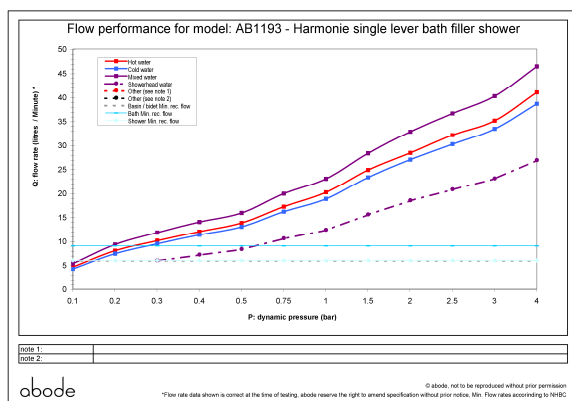

- Min / Max water pressure (bar): 0.20* / 5.00
*Detailed minimum pressure requirements for this product: Bath 0.2, Shower 0.3 (bar)
- Part G max. mixed flow rate at 3 bar (l/m): bath=40.2, shower=23.1
- Inlet connection type / length: Copper / 300 mm
- Inlet (plumbing connection) / outlet size: Ø15 / m16
- Product flow characteristics: Single flow
Non return valve(s) supplied or position:
- Aerator type: White flow straightener
- Control valve type: Single lever (45mm)
- Includes output diverter?: Yes
- Inlet meshed particle filters included:
- Shower hose type / length:

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives