## **AS2 THBSMRR KIT C**

## ASSURE Shower Range Thermostatic Bath Shower Mixer with

Rigid Riser



F	മ	a	tı	ш	r	മ	s:
	${}^{\circ}$	u	9	91		•	J.

- Thermostatic TMV2 control to bath & shower functions
- **Dual Control**
- Pre-set maximum temperature at 38c which can be overridden
- Operates at a minimum pressure of 0.5bar

## **Product Certifications:**




For more products, visit our website: <u>www.bristan.com</u>



Specification							
Style:	Contemporary						
Finish/Colour:	Chrome Plated						
Main Construction Material:	Brass						
No of Controls:	2						
Shower Type:	Bath Shower Mixer						
Shower Head Type:	Rigid Riser						
Valve/Cartridge Type:	Thermostatic						
Max Hot Water Supply Temperature °C:	60-65						
Maximum Static Pressure: (bar)	10 bar						
Plumbing System Suitability:	All, preferably balanced						
Working Pressure Range:	Min: 0.2 bar, Max: 5.0 bar						
Connection Inlet:	D 3.4"						
Connection Outlet:	15mm Compression						
Isolation Valve Included:	Yes						
Check Valve Included:	No						

## Dimensions (measurements in mm)

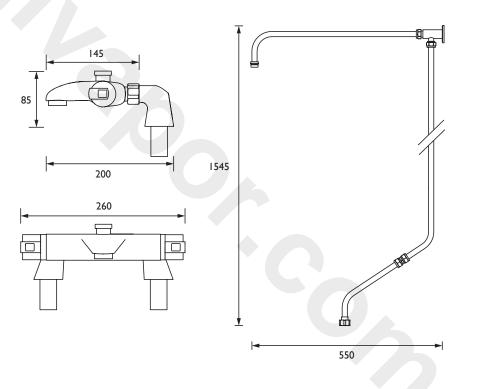

Flow Rates (I/min)										
System Pressure (bar)		0.5	1	2	3	5				
Through Handset (mixed)	10.5	11.3	15.9	22.6	27.7	35.7				

TECHNICAL



