

AS2 WMT THBSMVO C


ASSURE Tap Range Assure TMV2 Wall Mounted Thermostatic Bath Shower Mixer Valve Only Chrome



Features:

- Supplied with Fast Fix Isolating wallmount 12 kit.
- TMV2 thermostatic temperature control to prevent surges of hot or cold water
- Integral diverter valve
- 15mm inlet connections

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Wall Mounted
Connection Inlet:	G 3/4"
Connection Outlet:	15mm Compression
Number of Tap Holes:	2
Valve/Cartridge Type:	1/2" Quarter Turn Ceramic Disc Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure:	0.5 bar
Maximum Dynamic Pressure:	5.0 bar
Maximum Hot Water Temperature: °C	65
Maximum Static Pressure: (bar)	10
Flow Type:	Single
Isolation Included:	Yes

Dimensions (measurements in mm)

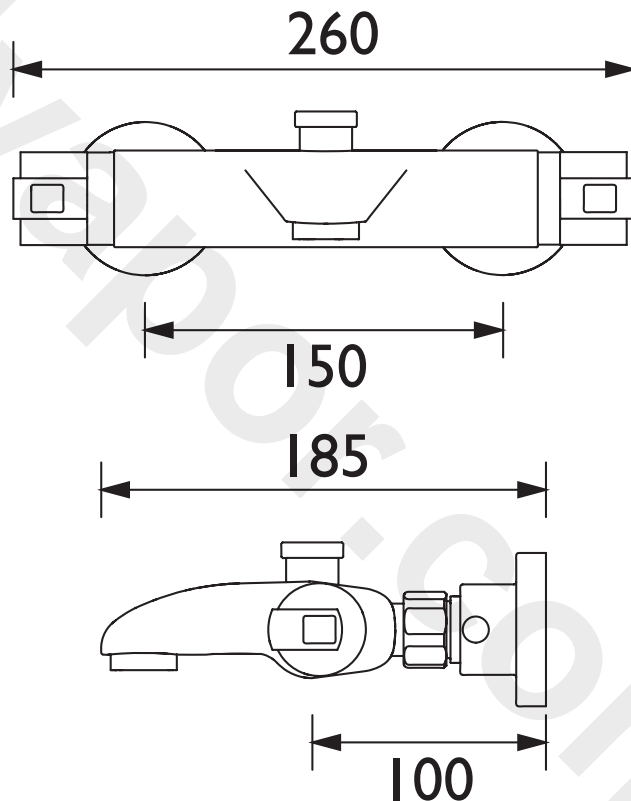

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
Through Bath Filler (Mixed)	11.3	15.9	22.6	27.7	35.7

TECHNICAL DATA SHEET



BRISTAN

D3