

Product Finish: Antique Brass

Product code: AT1047  
EAN13 barcode: 5060048380460



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


**Product features:**

- Supplied with fixed 1/2" inlets
- Traditional French provincial styling
- Quarter turn handle action for precise flow control
- Swivel aerator connector for maximum flexibility
- Custom designed for lower to mid pressures

**Additional information / Parts included:**

180mm centres, 40° revolve aerator

**Product dimensions:**

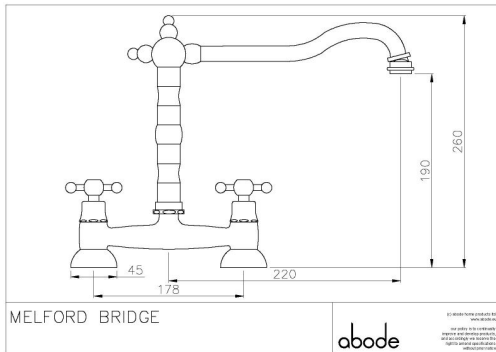

- Overall Height / projection: 268 mm
- Exit reach: 230 mm
- Exit height: 170 mm
- Centre distance(s):


- Base diameter(s): 45 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 60 mm

- Spout diameter: 18 mm
- Spout aerator size: 22f

**Packaged properties:**

- Box length: 560mm
- Box depth: 75mm
- Box width: 360mm
- Units per outer: 5
- Tap only weight: 1.84kg
- Boxed weight: 2.48kg

**Product flow characteristics:**

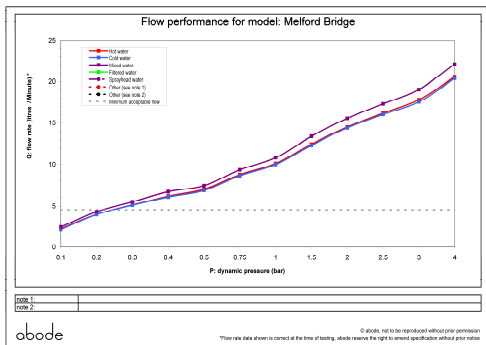

- Min / Max water pressure: 0.30 / 5.50 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 19.08

- Control valve type: Ceramic disc QT
- Product flow characteristics: Single flow
- Non return valve(s): No, none supplied

- Aerator type: Plastic mesh diffuser
- Accepts revolve / spray areator: Yes
- Spout connection method: Locking collar

- Tail pipe inlet / outlet size: 1/2" BSP Male
- Inlet pipe type / length: fixed threaded inlets / 100 mm

**Care instructions summary:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary (Full details available on request):**

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year