

Product Finish: Brushed nickel / black

Product code: AT1248
EAN13 barcode: 5060344153560



Product features:


- Supplied complete with flexible tail pipes for fast simple fitting
- Quarter turn handle action for precise flow control
- Additional jet spray function
- Solid and functional European architect design styling
- Antisplash spout supplied as standard

Additional information / Parts included:

Includes triangular stabilising bracket, 1 x 2.0mm 1 x 2.5mm A/F Allen key - sco06028 kit

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

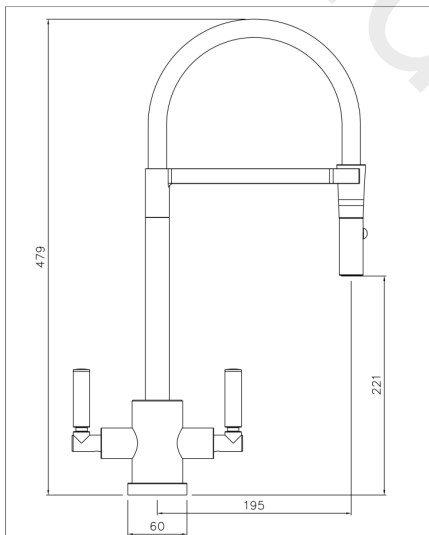

- Overall Height / projection: 479 mm
- Exit reach: 195 mm
- Exit height: 221 mm
- Centre distance(s):

- Base diameter(s): 60 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 45 mm

- Spout diameter: 24 mm
- Spout aerator size: 22f

Packaged properties:


- Box length: 575mm
- Box depth: 80mm
- Box width: 350mm
- Units per outer: 5
- Tap only weight: 3.17kg
- Boxed weight: 2.20kg

ATLAS MONO PROFESSIONAL V1



© abode home products ltd
www.abode.co.uk
Our priority is to continually improve our product range and we reserve the right to amend specifications without prior notice.

Product flow characteristics:

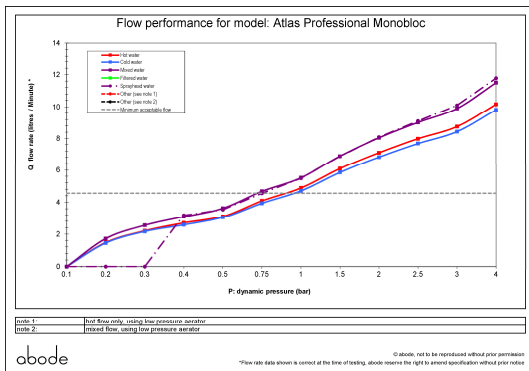

- Min / Max water pressure: 0.75 / 5.50 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 10.10

- Control valve type: Ceramic disc QT
- Product flow characteristics: Single flow
- Non return valve(s): Integral to hot & cold inlets

- Aerator type: Amfag aerator dual jet
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M12 / 1/2" BSP Male
- Inlet pipe type / length: flexible stainless braided hose / 260 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year