

Product Finish: Matt Black

Product code: AT2044  
EAN13 barcode: 5060344158824



**Product features:**


- Metal construction throughout
- Crystal clear filtered water, easy to change, high quality carbon filter
- Supplied complete with flexible tail pipes for fast simple fitting
- Modern minimalism with flair
- filtered water through a dedicated spout pathway

**Additional information / Parts included:**

Includes Aquifer Safelock filter installation pack

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

**Product dimensions:**

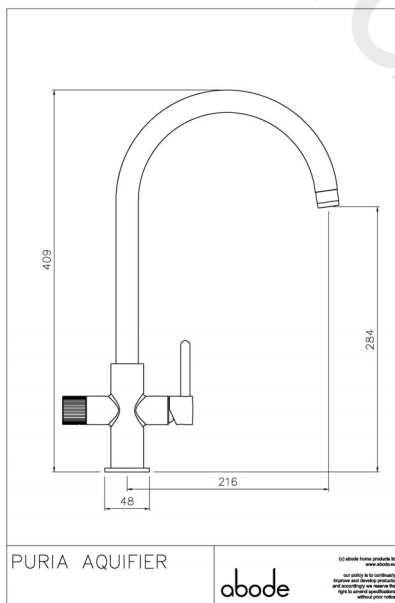

- Overall Height / projection: 409 mm
- Exit reach: 216 mm
- Exit height: 284 mm
- Centre distance(s):


- Base diameter(s): 48 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 50 mm

- Spout diameter: 24 mm
- Spout aerator size: M22 female

**Packaged properties:**

- Box length: 440mm
- Box depth: 65mm
- Box width: 340mm
- Units per outer: 5
- Tap only weight: 1.24kg
- Boxed weight: 2.93kg

**Product flow characteristics:**

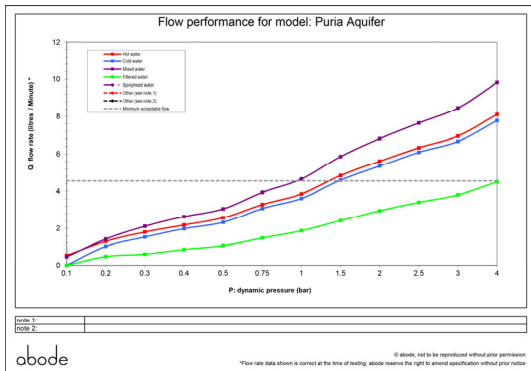

- Min / Max water pressure: 1.00 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 08.46

- Control valve type: Single lever ceramic cartridge, ceramic disc QT
- Product flow characteristics: (C&H / F) dual flow
- Non return valve(s): Integral to cold hose inlet only

- Aerator type: Neoperl aerator honeycomb dual flow
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw (2.5mm)

- Tail pipe inlet / outlet size: M8 / 1 x 1/2" BSP Male, 2 x 1/2" BSP Female

**Care instructions summary:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary** (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year