

Product Finish: Chrome

Product code: AT2138
EAN13 barcode: 5060344159135




Product features:

- Metal construction throughout
- Quarter turn handle action for precise flow control
- Solid and functional European architect design styling
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting

Additional information / Parts included:

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

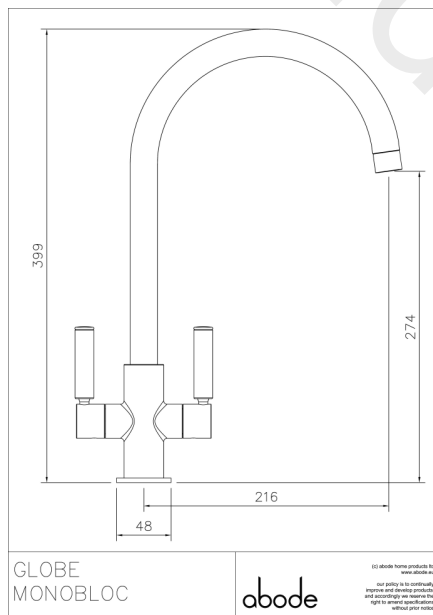

- Overall Height / projection:** 399 mm
- Exit reach:** 216 mm
- Exit height:** 274 mm
- Centre distance(s):**


- Base diameter(s):** 48 mm
- Recommended hole diameter:** Ø 35 mm
- Max. surface depth:** 40 mm

- Spout diameter:** 24 mm
- Spout aerator size:** M22 x 1 F

Packaged properties:

- Box length:** 435mm
- Box depth:** 70mm
- Box width:** 340mm
- Units per outer:** 5
- Tap only weight:** 1.23kg
- Boxed weight:** 1.80kg

Product flow characteristics:

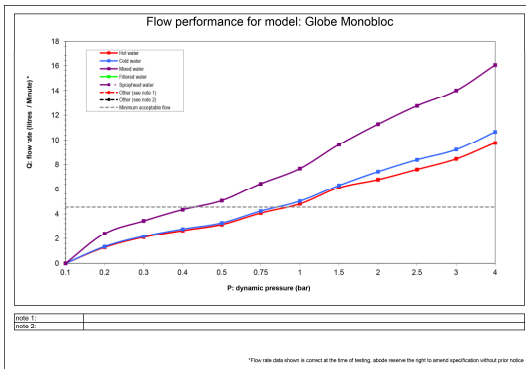

- Min / Max water pressure:** 0.50 / 5.5 bar
- Recommended / Max water temperature:** 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min):** 14.01

- Control valve type:** M20 ceramic quarter turn
- Product flow characteristics:** Single flow
- Non return valve(s):** Integral to hot & cold inlets

- Aerator type:** Honeycomb Aerator
- Accepts revolve / spray areator:** Yes
- Spout connection method:** Rear of body

- Tail pipe inlet / outlet size:** M10 / 1/2" BSPP male
- Inlet pipe type / length:** flexible stainless braided hose / 365 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year