


Product Finish: Brushed Brass

Product code: AT2182
EAN13 barcode: 5060879990210

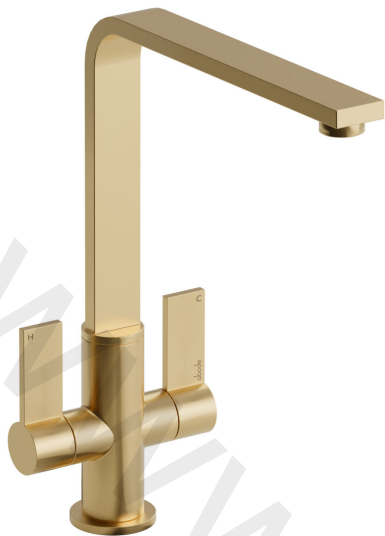

Product features:


- Metal construction throughout
- Supplied complete with flexible tail pipes for fast simple fitting
- Minimalist planate design form
- Quarter turn handle action for precise flow control
- Antisplash spout supplied as standard

Additional information / Parts included:

Includes triangular stabilising bracket, 2.0 & 2.5mm A/F Allen key & high flow aerator

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

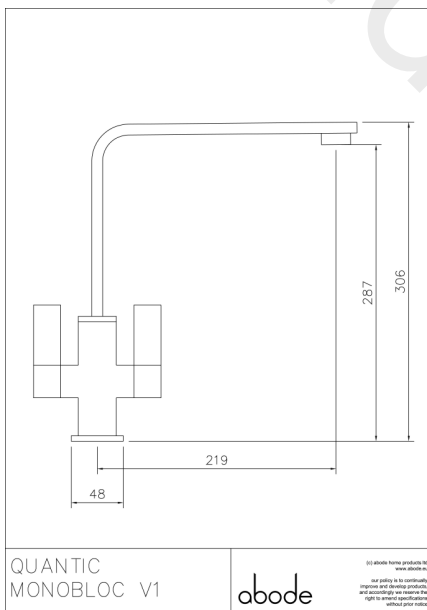

- Overall Height / projection:** 306 mm
- Exit reach:** 219 mm
- Exit height:** 287 mm
- Centre distance(s):**


- Base diameter(s):** 48 mm
- Recommended hole diameter:** Ø 35 mm
- Max. surface depth:** 45 mm

- Spout diameter:** 30 x 10 mm
- Spout aerator size:** M24

Packaged properties:

- Box length:** 445mm
- Box depth:** 70mm
- Box width:** 335mm
- Units per outer:** 5
- Tap only weight:** 1.30kg
- Boxed weight:** 1.74kg

Product flow characteristics:

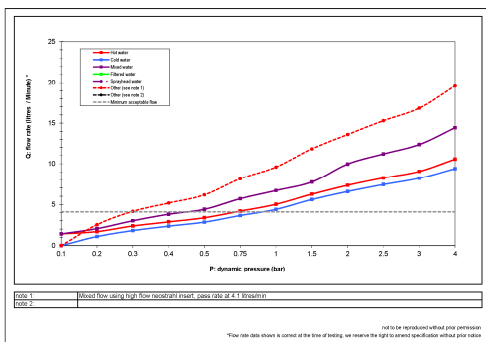

- Min / Max water pressure:** 0.30 / 5.50 bar
- Recommended / Max water temperature:** 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min):** 12.36

- Control valve type:** M20 ceramic disc, quarter turn operation
- Product flow characteristics:** Single flow
- Non return valve(s):** Cold only

- Aerator type:** Honeycomb aerator & hi-flow neostrahl
- Accepts revolve / spray areator:** No
- Spout connection method:** Grub screw

- Tail pipe inlet / outlet size:** M10 / 1/2" Male (Hot), 1/2" Female (Cold)
- Inlet pipe type / length:** flexible stainless braided hose / 365/370 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year