

Astbury Single Lever c/w integral Hendon Sidespray

Product Finish: Chrome

Product code: AT3005

EAN13 barcode: 5060048383140



Product features:

- Low lead brass construction
- Ceramic handle(s) as standard
- Antisplash spout supplied as standard
- Integral diverter from spout to sprayhead (spout flow stops when spray activated)
- Leading design performance requiring higher pressures

Additional information / Parts included:

The installation of this product should respect requirement IRN R090. Triangular stabiliser, Cache aerator key

Packaged properties:


Box length (mm): 605 **Box depth (mm):** 85

Box width (mm): 320 **Units per outer:** 5

Tap only weight (kg): 3.44


Boxed weight (kg): 4.24

Product dimensions:

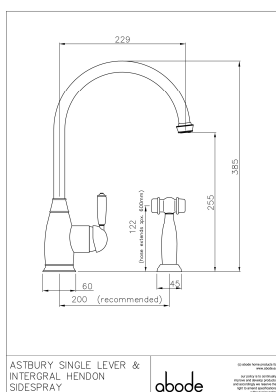

- **Overall Height / projection (mm):** 385
- **Exit reach (mm):** 229
- **Exit height (mm):** 255
- **Centre distance(s):** N/A
- **Base diameter(s) (mm):** 60
- **Recommended hole diameter (mm):** Ø 35
- **Max. surface depth (mm):** 70
- **Spout diameter (mm):** 20
- **Spout aerator size:** M20

Product flow characteristics:

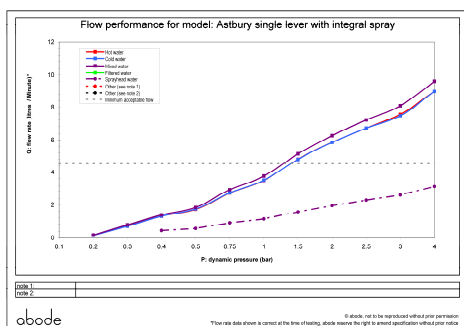

- **Min / Max water pressure (bar):** 1.25 / 5.5
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 8.09
- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non-return/Check valve(s):** Integral to H & C inlets and sprayhead
- **Aerator type:** Neoperl SLIM AIR CCSLC – STD flow class V
- **Accepts revolve / spray aerator:** No
- **Spout connection method:** Locking collar
- **Tail pipe inlet / outlet size:** 1/2" BSP Male / M10
- **Inlet pipe type / length (mm):** flexible stainless braided hose / 480

Care instructions summary:

.Clean the product regularly using a mild washing up liquid, do not use any other cleaners.
 .Regular cleaning will prevent the build up of lime scale and dirt
 .After cleaning rinse thoroughly with clean water to remove any cleaner residue
 .Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

.Materials and workmanship defects warranted for 5 years
 .Valves and working parts warranted for 5 years
 .Surface warranty defects warranted for 1 years
 .O-rings, hoses & gaskets warranted for 1 years

abode