

# Brompton Bridge c/w independent Hendon Sidespray

**Product Finish:** Chrome

**Product code:** AT3021  
**EAN13 barcode:** 5060048383300



## Product features:

- Low lead brass construction
- Quarter turn handle action for precise flow control
- Sprayhead functions independently from the tap (spout flow continues if spray activated)
- Supplied with long 1/2" inlets, suitable for thicker worktops
- Leading design performance requiring higher pressures


## Additional information / Parts included:

The installation of this product should respect requirement IRN R090. Cache key, allen key 2mm

## Packaged properties:


**Box length (mm):** 605    **Box depth (mm):** 85    **Tap only weight (kg):** 3.26  
**Box width (mm):** 320    **Units per outer:** 5    **Boxed weight (kg):** 4.08

## Product dimensions:

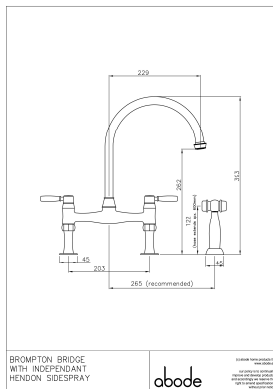

- **Overall Height / projection (mm):** 393
- **Exit reach (mm):** 229
- **Exit height (mm):** 262
- **Centre distance(s):** 203mm nominal
- **Base diameter(s) (mm):** 45
- **Recommended hole diameter (mm):** Ø 35
- **Max. surface depth (mm):** 90
- **Spout diameter (mm):** 20
- **Spout aerator size:** M20

## Product flow characteristics:

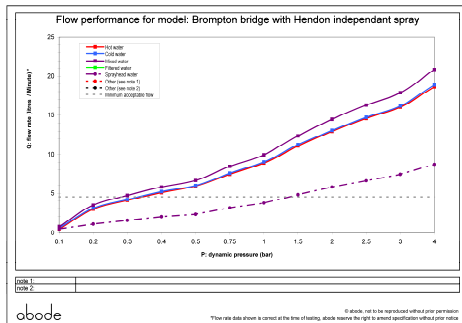

- **Min / Max water pressure (bar):** 1.00 / 5.5 (tap), 2.0 (spray)
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 17.86
- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** Single flow
- **Non-return/Check valve(s):** Integral to H & C inlets and sprayhead
- **Aerator type:** Neoperl SLIM AIR CCSLC – STD flow class V
- **Accepts revolve / spray aerator:** No
- **Spout connection method:** Locking collar
- **Tail pipe inlet / outlet size:** 1/2" BSP Male / 3/4" BSP male
- **Inlet pipe type / length (mm):** fixed threaded inlets / 105

## Care instructions summary:

- Clean the product regularly using a mild washing up liquid, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 years
- O-rings, hoses & gaskets warranted for 1 years

abode