

Bayenne Monobloc c/w integral Hendon Sidespray

Product Finish: Chrome

Product code: AT3025

EAN13 barcode: 5060048383348



Product features:

- Low lead brass construction
- Quarter turn handle action for precise flow control
- Ceramic handle(s) as standard
- Integral diverter from spout to sprayhead (spout flow stops when spray activated)
- Leading design performance requiring higher pressures

Additional information / Parts included:

The installation of this product should respect requirement IRN R090. Triangular stabiliser

Packaged properties:

Box length (mm): 605

Box depth (mm): 85


Tap only weight (kg): 4.10

Box width (mm): 320

Units per outer: 5

Boxed weight (kg): 4.88

Product dimensions:

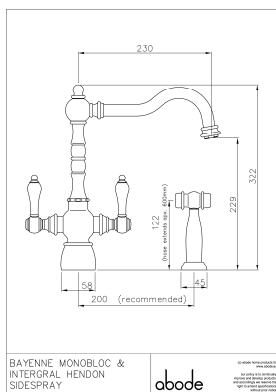


- **Overall Height / projection (mm):** 322
- **Exit reach (mm):** 230
- **Exit height (mm):** 229
- **Centre distance(s):** N/A

- **Base diameter(s) (mm):** 58
- **Recommended hole diameter (mm):** Ø 35
- **Max. surface depth (mm):** 60

- **Spout diameter (mm):** 20
- **Spout aerator size:** M24

Product flow characteristics:

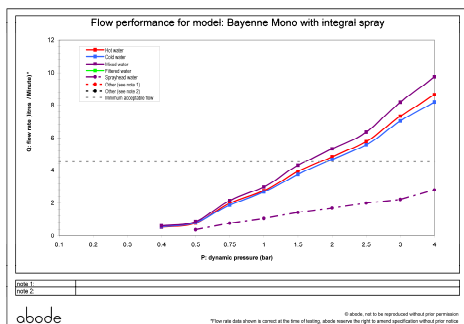

- **Min / Max water pressure (bar):** 1.50 / 5.5
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 8.18

- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** Single flow
- **Non-return/Check valve(s):** Integral to H & C inlets and sprayhead

- **Aerator type:** Neoperl honeycomb light blue
- **Accepts revolve / spray aerator:** No
- **Spout connection method:** Locking collar

- **Tail pipe inlet / outlet size:** 1/2" BSP Male / M10
- **Inlet pipe type / length (mm):** flexible stainless braided hose / 480

Care instructions summary:

- Clean the product regularly using a mild washing up liquid, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 years
- O-rings, hoses & gaskets warranted for 1 years

abode