


## CERAPLUS

### Exposed sequential basin mixer with 230 mm lever and 250 mm spout, On-Off S-connectors with noise reducers

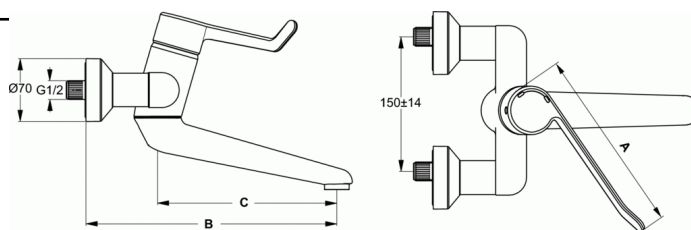

		A	B	C
B8222	On-Off S-connectors with noise reducers	180	230	150
B8314	Standard S-connectors with noise reducers	180	208	150
B8223	On-Off S-connectors with noise reducers	230	230	150
B8315	Standard S-connectors with noise reducers	230	208	150
B8224	On-Off S-connectors with noise reducers	180	280	200
B8316	Standard S-connectors with noise reducers	180	258	200
B8225	On-Off S-connectors with noise reducers	230	280	200
B8317	Standard S-connectors with noise reducers	230	258	200
B8226	On-Off S-connectors with noise reducers	230	330	250
B8318	Standard S-connectors with noise reducers	230	308	250

#### Exposed sequential basin mixer with 230 mm lever and 250 mm spout, On-Off S-connectors with noise reducers

Spout 250 mm

On-Off S-connectors with noise reducers

Handle with plastic red/ blue indicators

Aerator - Anti-vandal M24x1-A (big profile), Laminar stream

Cartridge Ø47 mm Cycle Valve with Hot Water Stop installed

Cartridge with Hot Water Stop - to endure torque of min 30 Nm

Spout fixation options for: middle position fixation; limited rotation

Non-limited rotation

Sealed escutcheons

Covered nuts

#### FINISHES\*



AA

\* AA = Chrome

#### VARIANTS

Exposed sequential basin mixer with 230 mm lever and B8318 250 mm spout, standard S-connectors with noise reducers