




VOLA BK, BKA, BKB

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

BK 1 - 4 - 5 - 15
BKA A1 - A4 - 5 - 16
BKB B1 - B3 - 5 - 16




vola
www.vola.com
5 705230 201177
BK_V1_40998626
31-01-2020

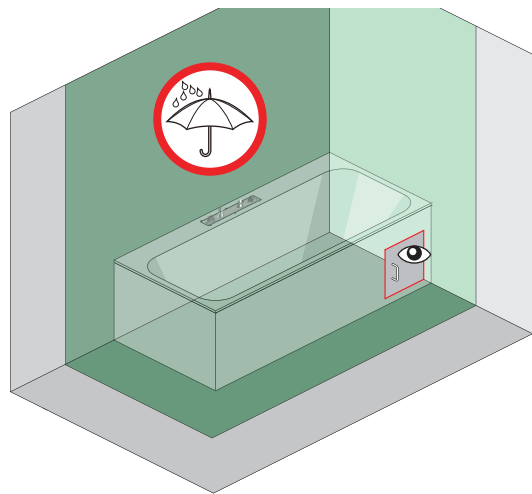


S BK: 1, 2, 5, 7, 9

L BK: 3, 4, 6, 8, 10, 11, 12, 13, 14, 15, 16



BK

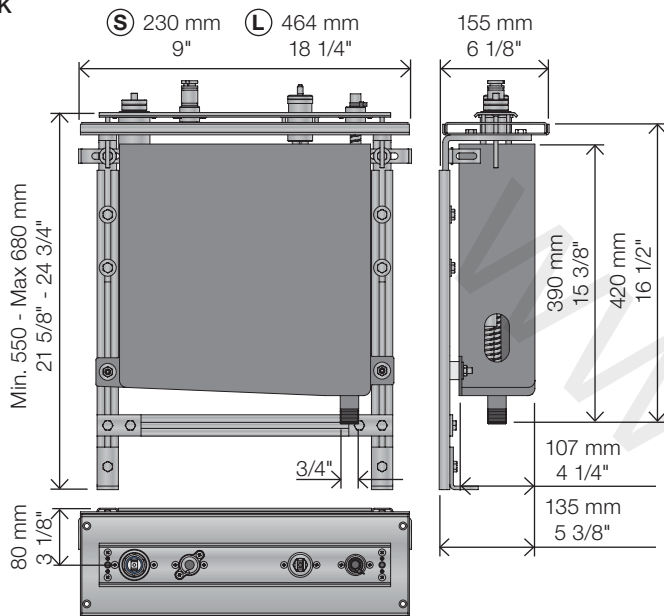


BKA

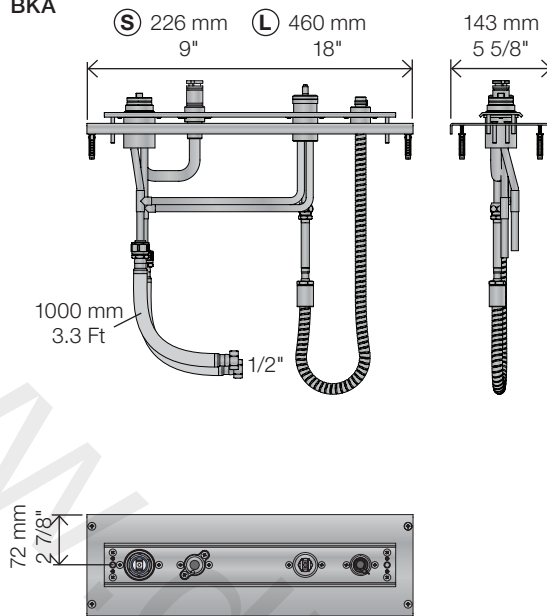


BKB

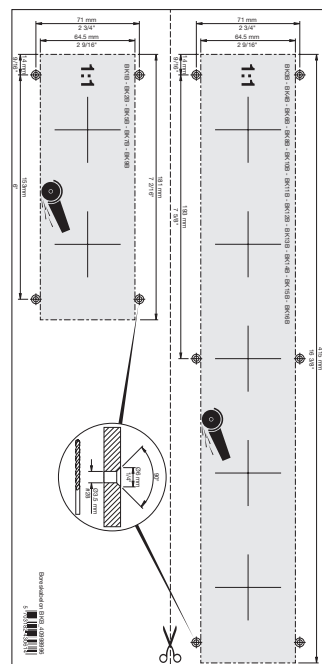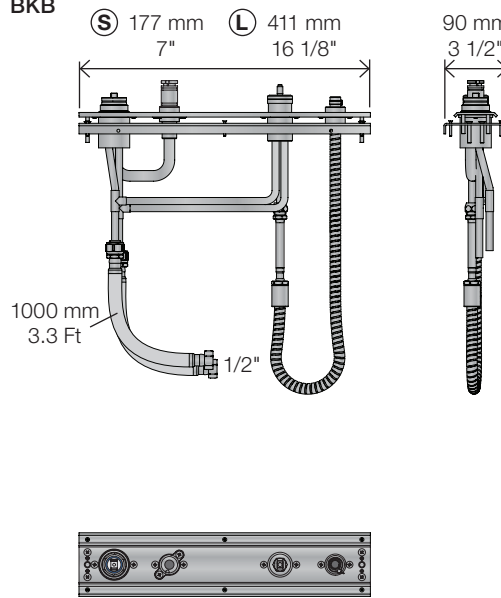


BK

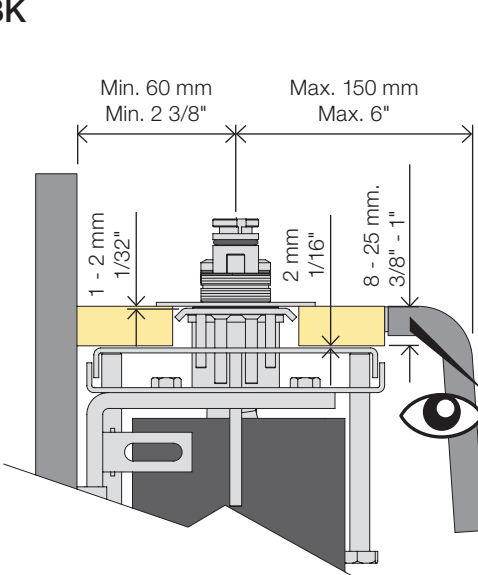


1

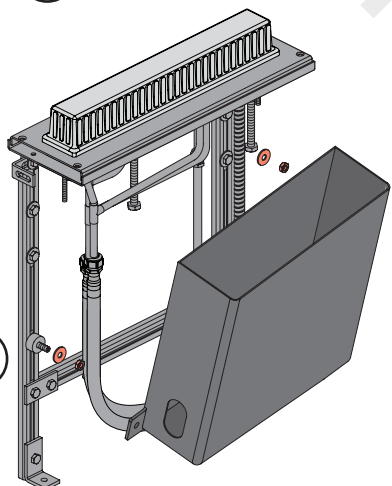





2

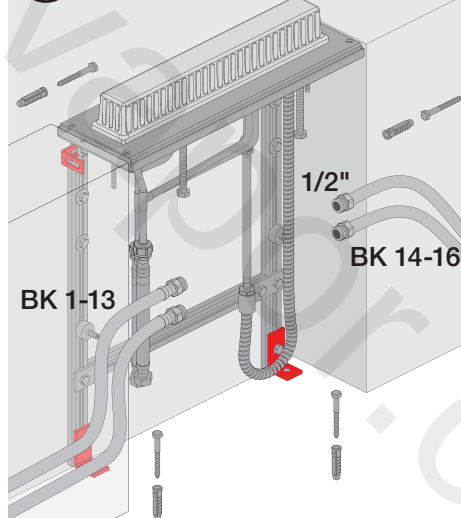


3

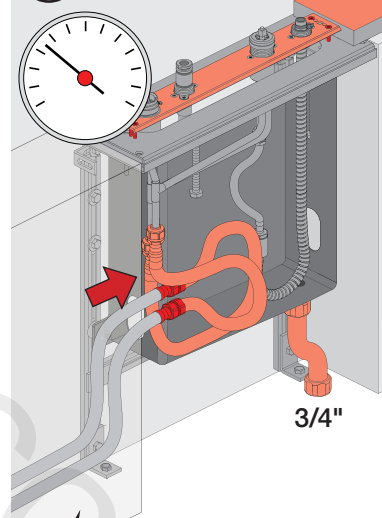


4

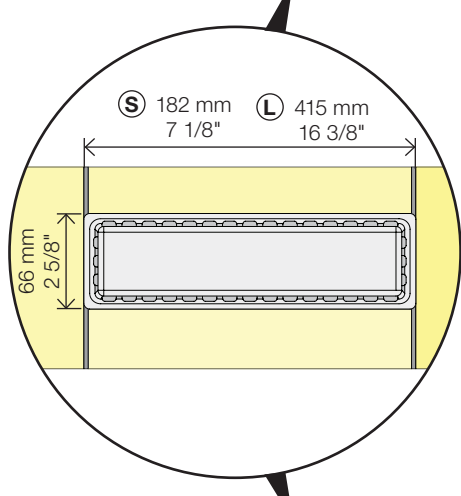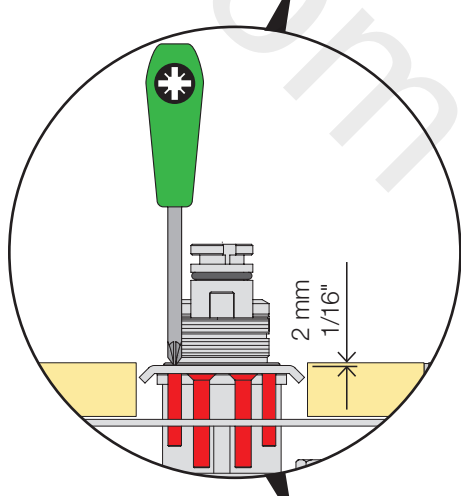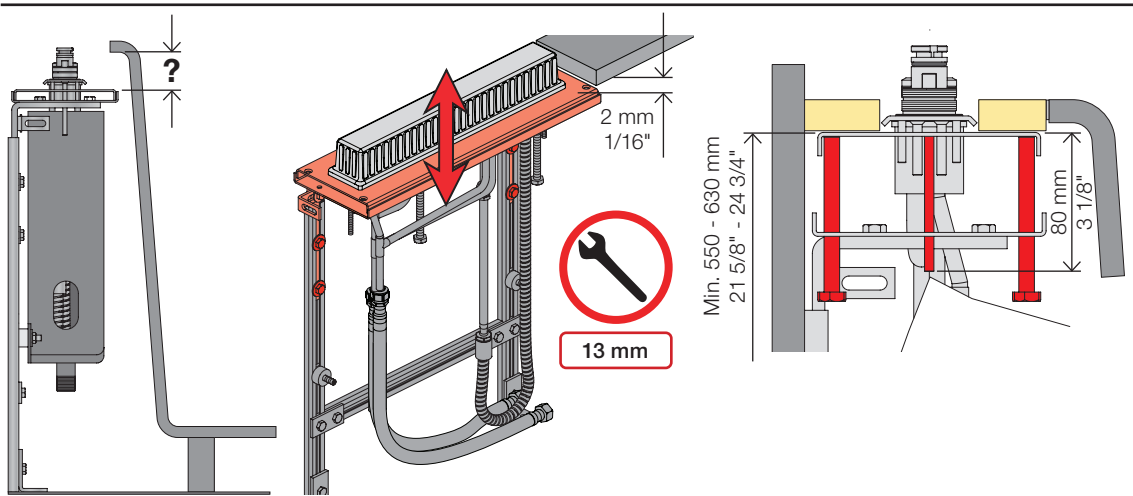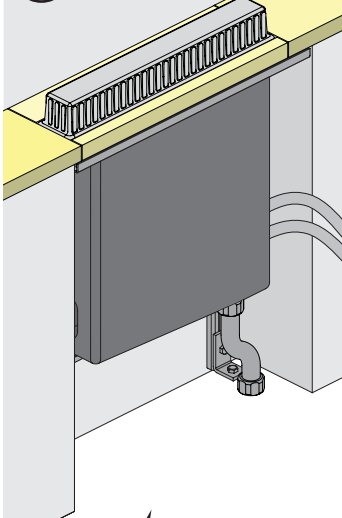


BKA

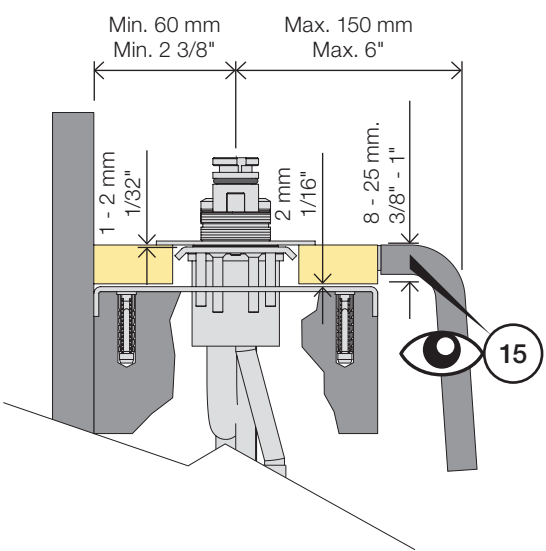


A1

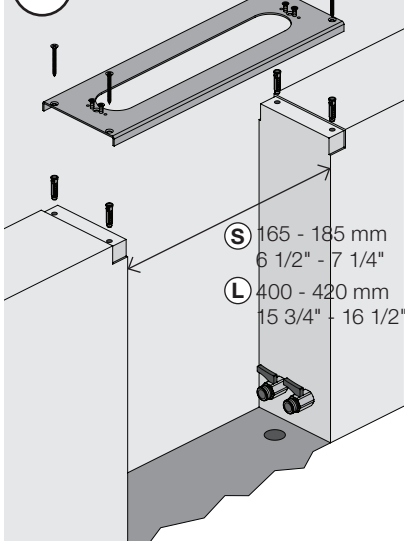


A2

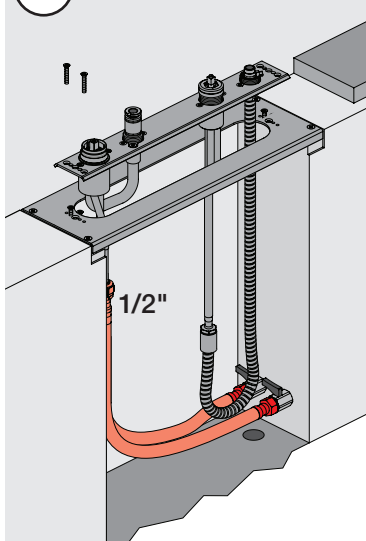





A3

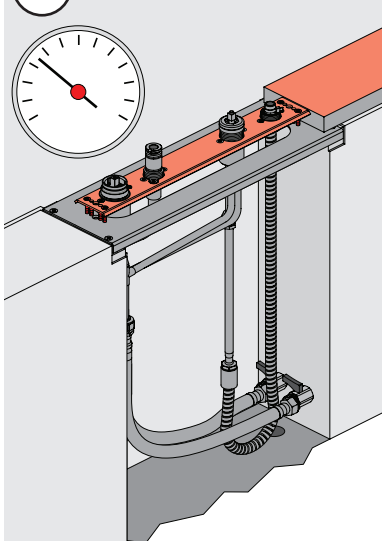



A4

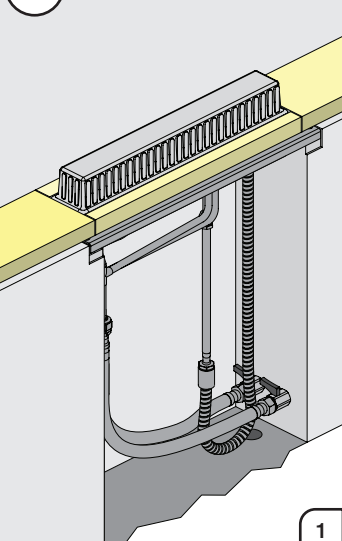

BKB

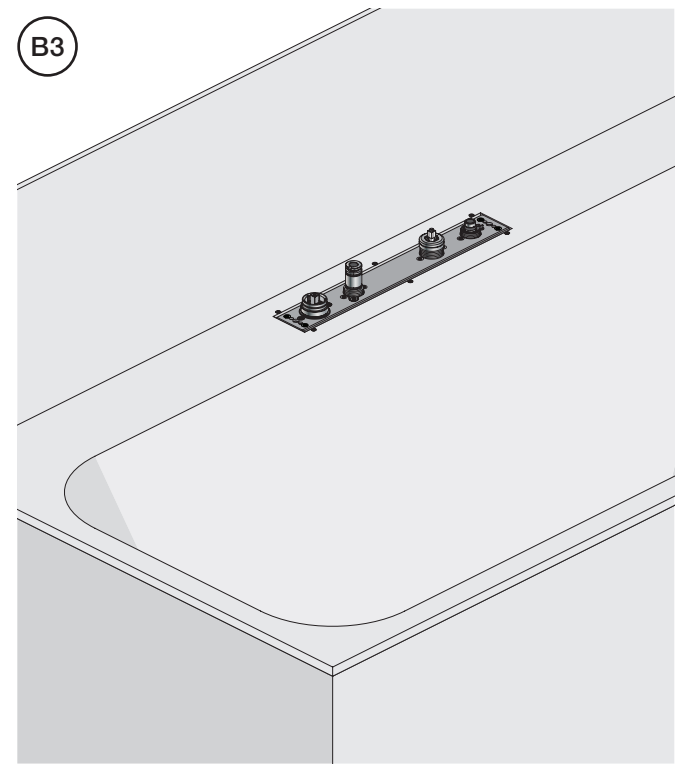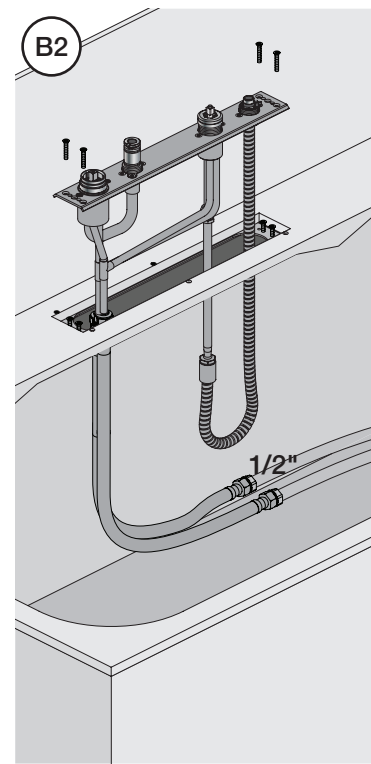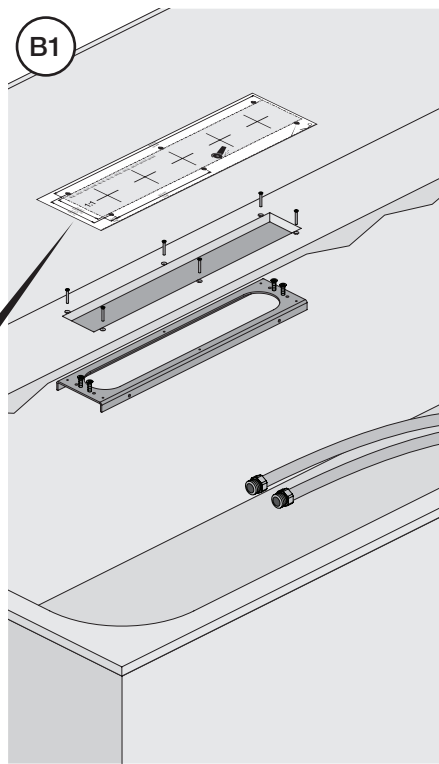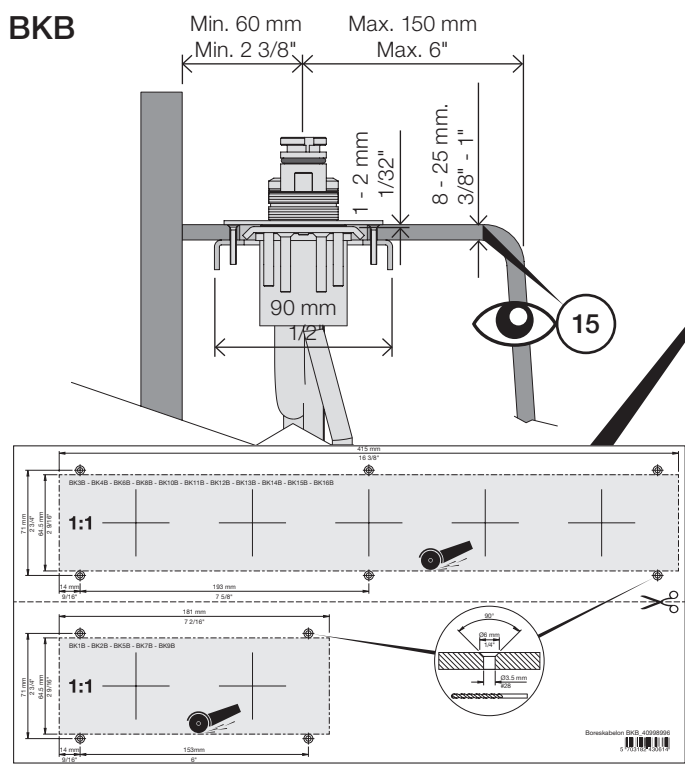

5 BK-BKA-BKB 5, 6, 7, 8, 10, 11, 12, 13, 15, 16
Col. 40, 61, 64, 70




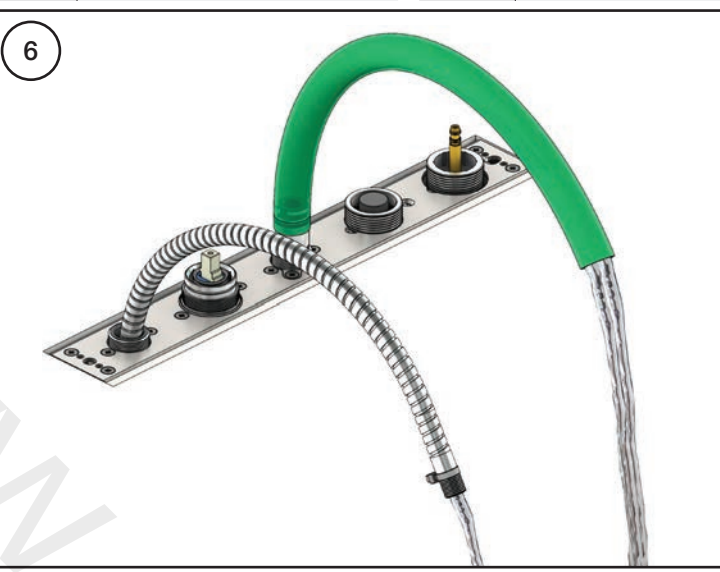
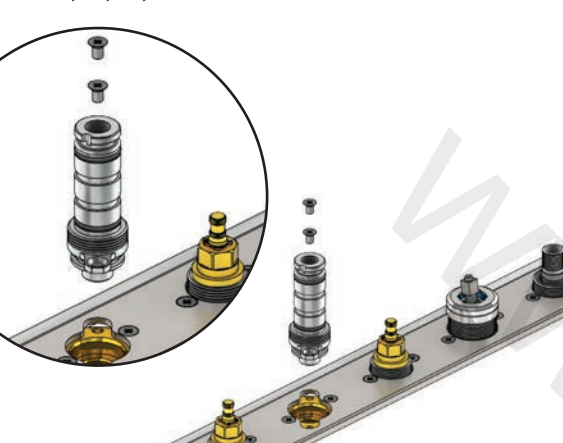


7 BK-BKA-BKB 14, 15, 16

38°C
100°F

1

2

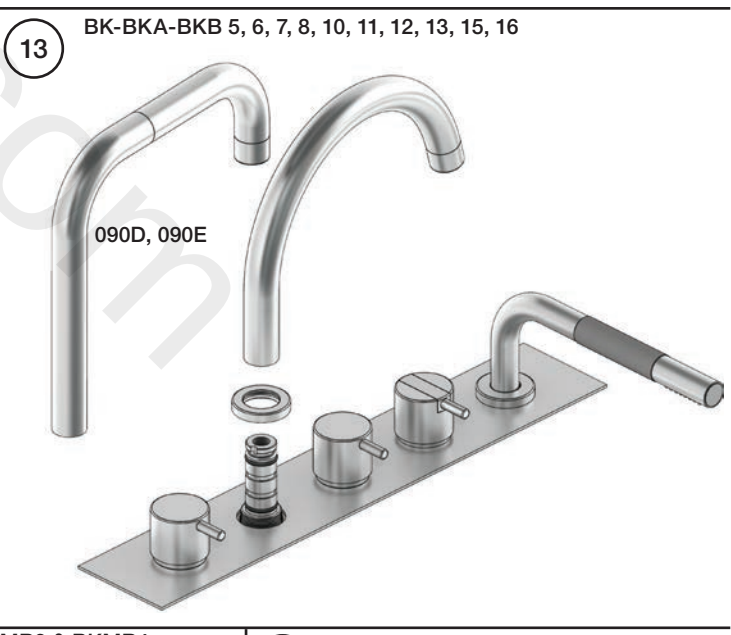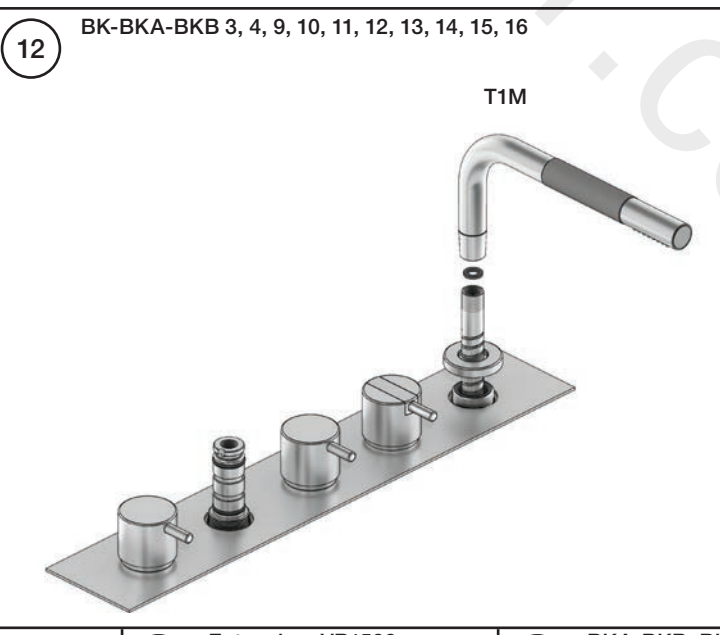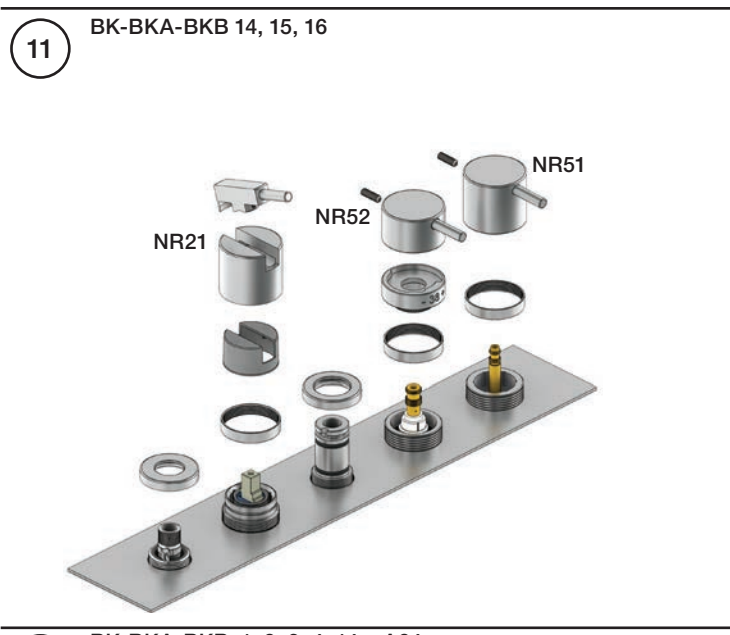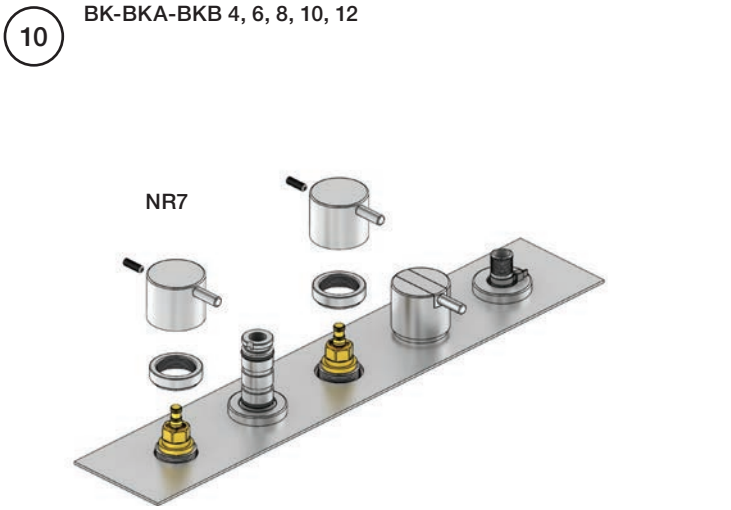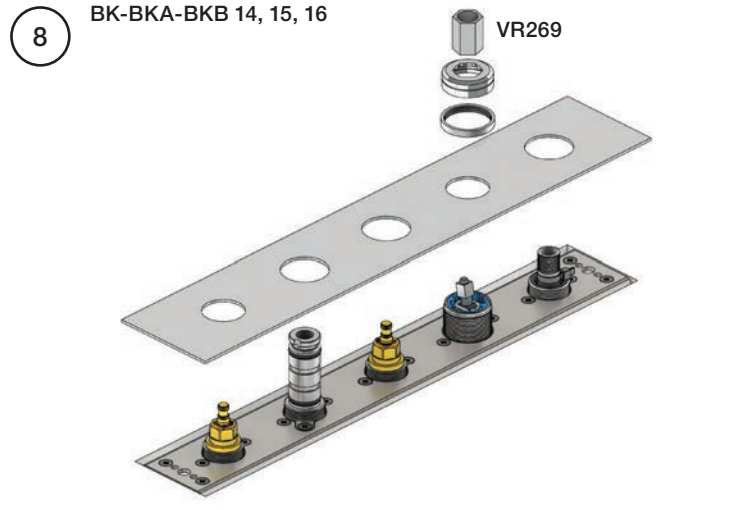

14

EN1717 Pipe interrupter
Rohrunterbrecher
Rørafbryder
Röravbrytare
Buisonderbreker
Disconnecteur à encastrer

Not included.
Nicht enthalten.
Ikke inkluderet.
Ingår inte.
Niet meegeleverd.
Non inclus.

Min. 150 mm
Min 6"


3/4"

3/4"

A24

15 Extension: VR1599		
Tiles: Fliesen: Fliser: Fliser: Tegels: Carreaux:	8 - 25 mm	Standard
	26 - 50 mm	VR1599


Standard:
M5 x 30



VR1599:
M5 x 50

16 BKA-BKMR3 & BKMR4

Box for drain	- Alternative installation
Ablauf Kasten	- Alternative installation
Overløbskasse	- Alternativ installation
Avløpslåda	- Alternativ installation
Afvoerbak	- Alternativ installation
Boîte de d'évacuation	- Installation alternative

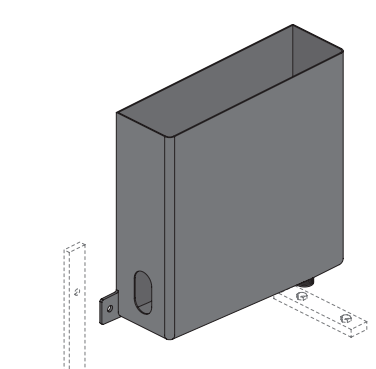

17


Data, 3 Bar (Max. 10 Bar):


		l/min.	Gal/min.
T1		10	2.6
090D/E	{ BK 5, 7, 10, 12:	20	5.3
	{ BK 6, 8, 11, 13:	25	6.6
	{ BK 15, 16:	25	6.6
A24	{ BK 1, 3:	15	3.9
	{ BK 2, 4:	19	5.0
	{ BK 14:	22	5.8

A vertical thermometer icon with a red bulb and a red liquid column. The scale is not explicitly labeled, but it is used to indicate the temperature range for the data presented.


Max. 65°C, 150°F

2

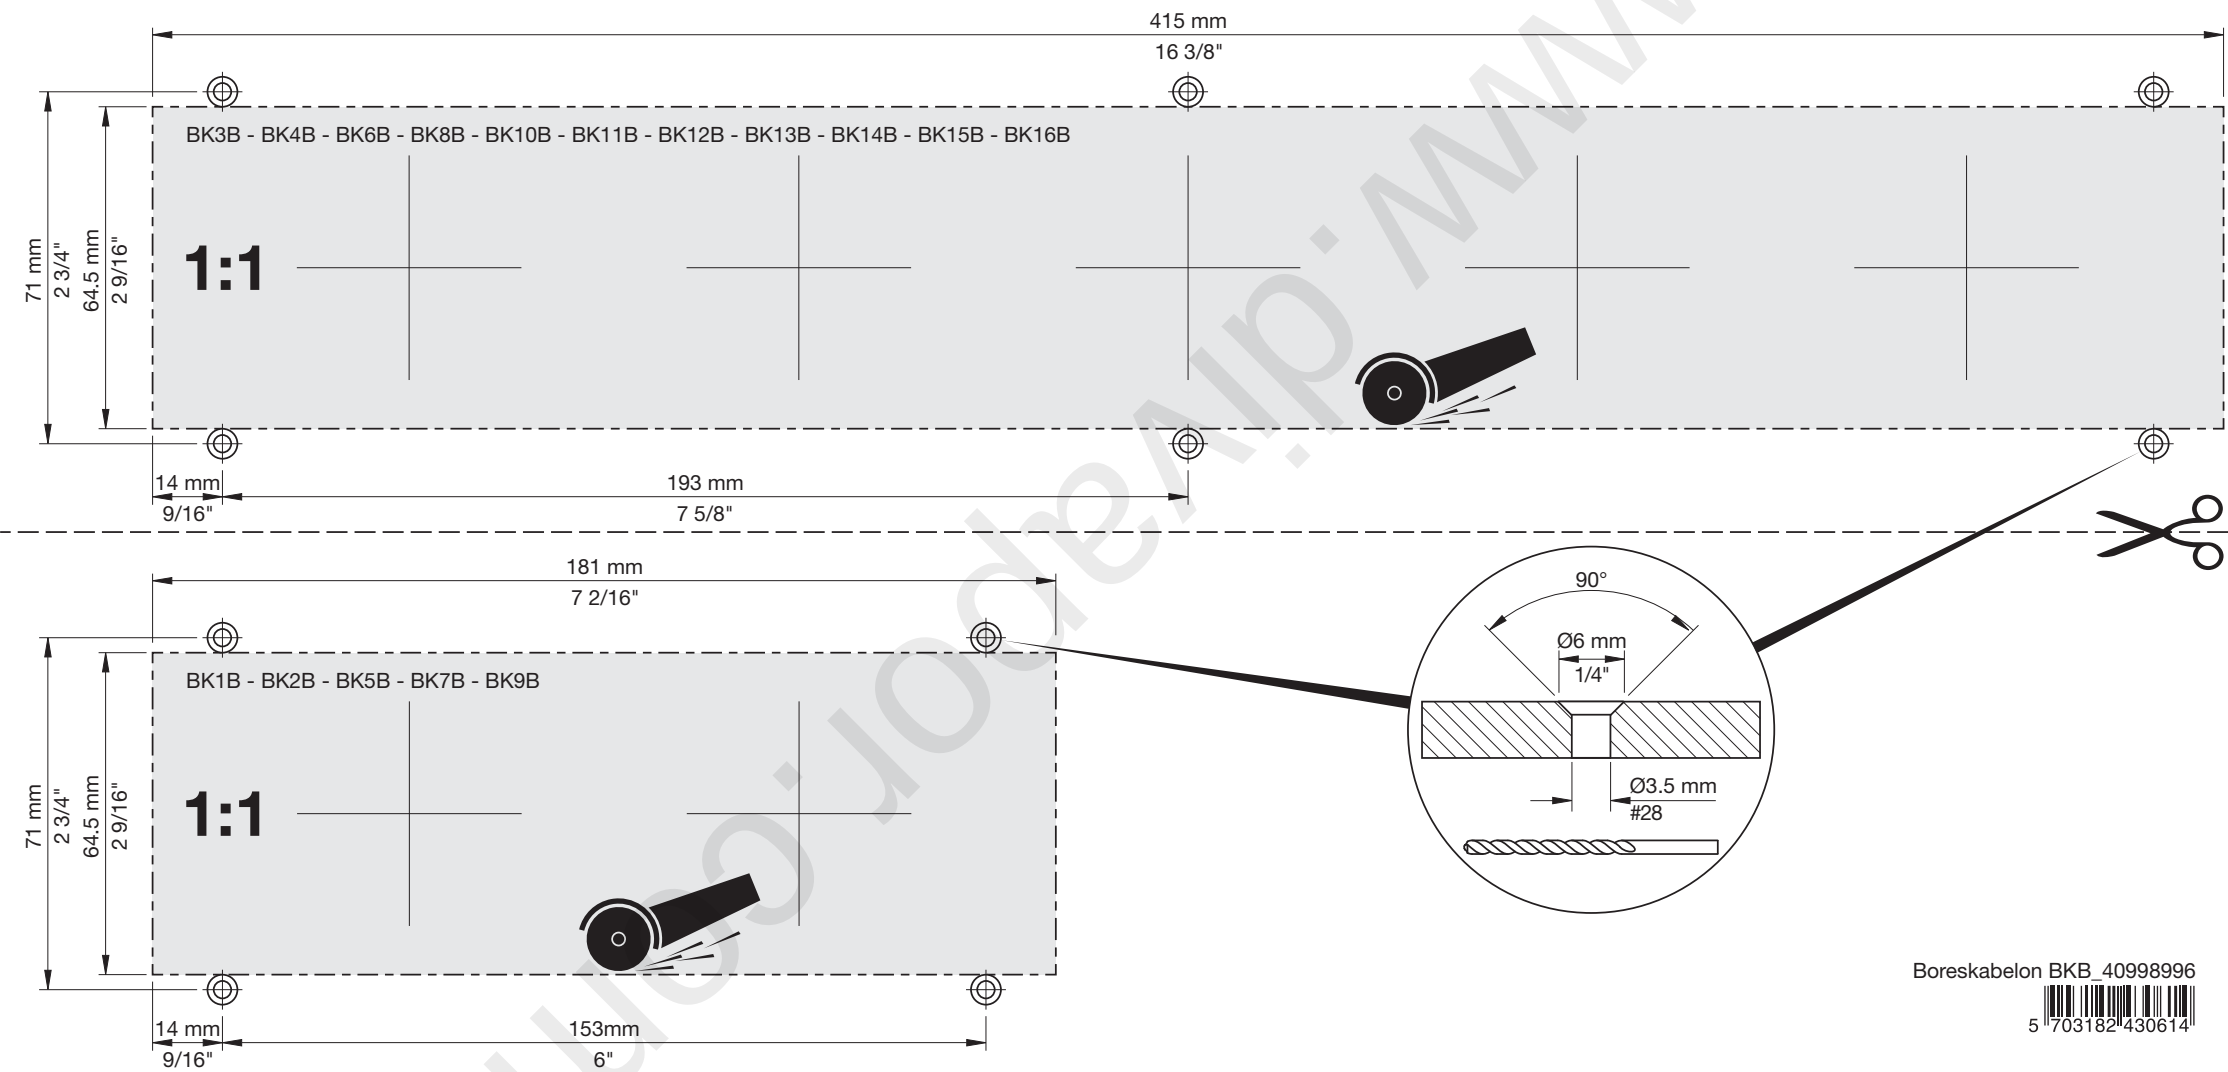


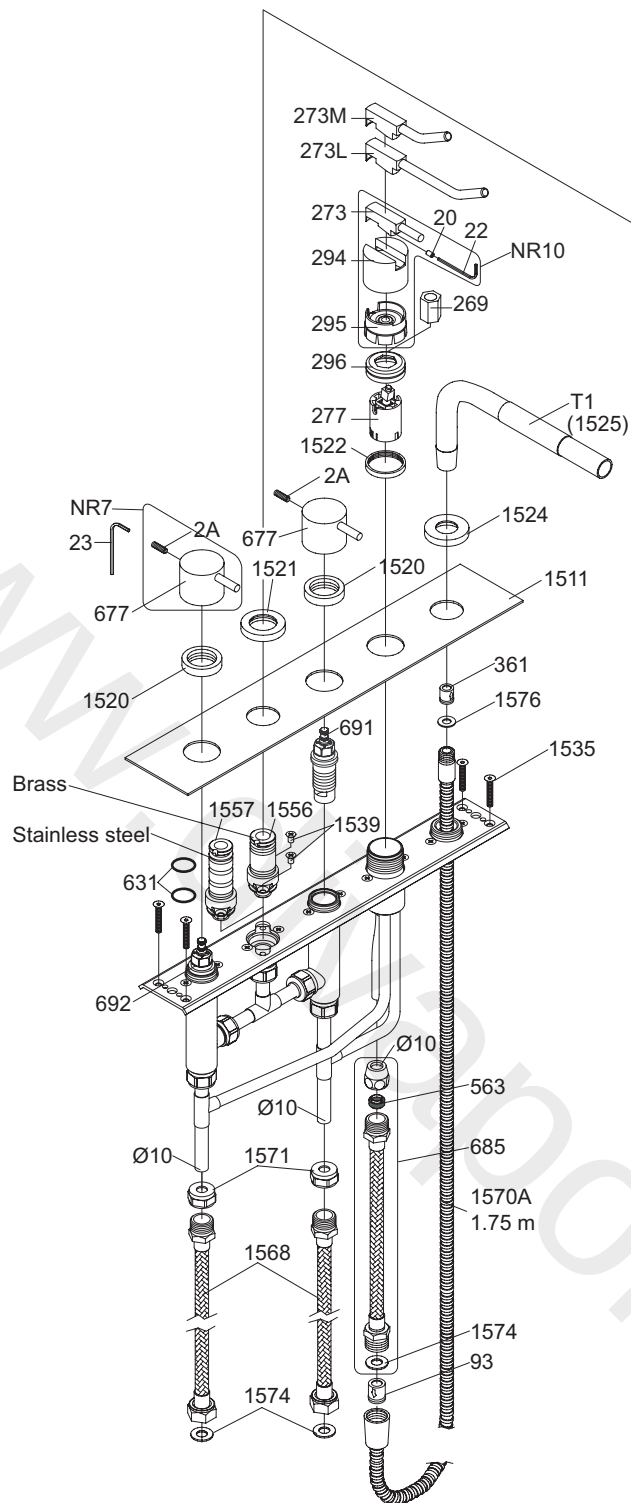

BK11-090D

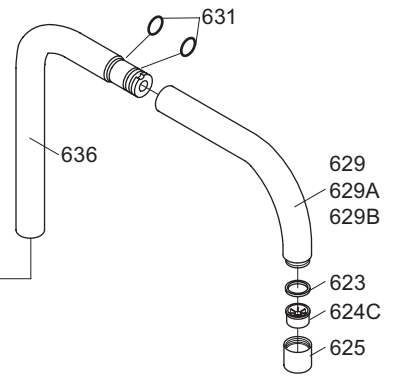

BK13-090E



NR7: VR2A, VR23, VR677
 NR10: VR20, VR22, VR273, VR294, VR295
 VR090D/C: VR623, VR624C, 4xVR631, VR1902
 VR277K: VR22, VR269, VR277
 VR297: VR20, VR22, VR269, VR273, VR277, VR294, VR295, VR296
 VR691K: VR23, VR691
 VR692K: VR23, VR692



vola

Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA BK11/13

Date
 Mar. 11

Rev.
 1

Sheet
 SB 75