


CAS SHC3DIV C

CASINO Shower Range Casino Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter and Stopcock Chrome

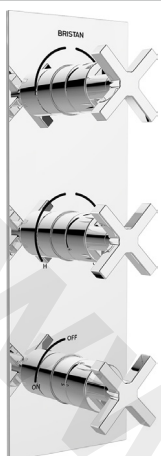

Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 60mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C

Product Certifications:



WRAS Cert. Number: 2005900
WRAS Expiry Date: 31/05/2025




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Concealed
Shower Head Type:	None
Valve/Cartridge Type:	Manual
Maximum Hot Water Supply Temperature	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems, ideally
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm Compression Connections

Dimensions (measurements in mm)

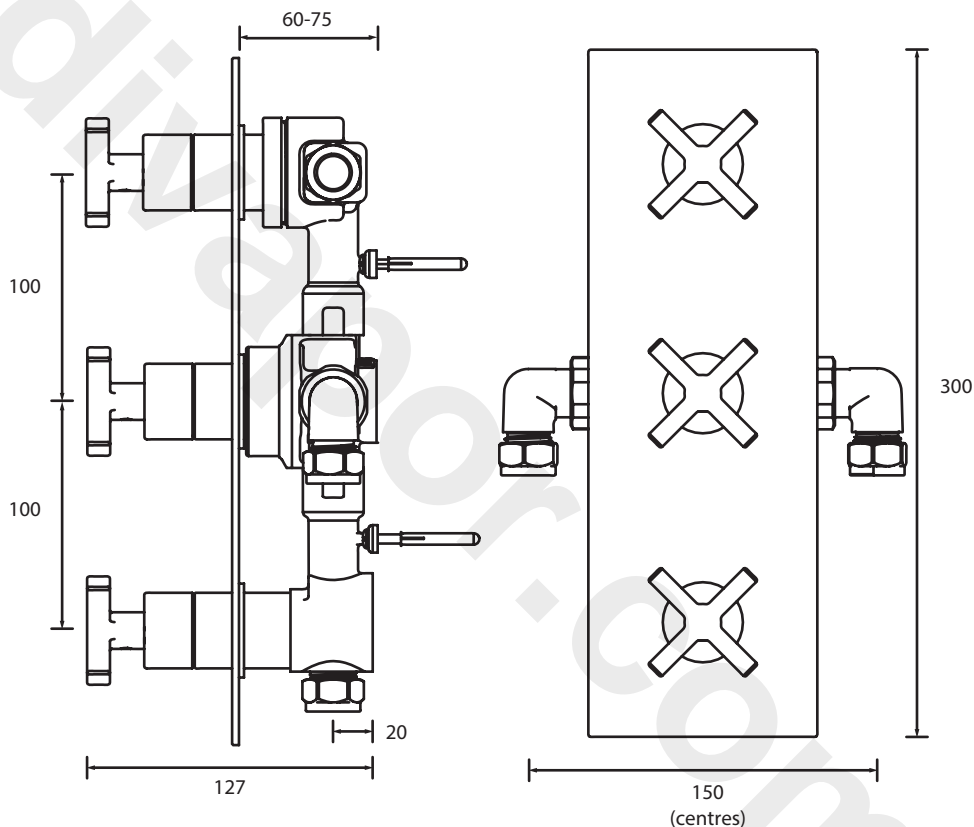

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	8.3	14.5	21.2	29.9	36.7	47.4

TECHNICAL
DATA
SHEET



BRISTAN

D6