

# VOLA 080, 080D, 080DK, 080K, 080W

Fitting instruction  
Montageanleitung  
Monteringsvejledning  
Monteringsvægledning  
Montage hanleiding  
Manuel de montage

| Data                                                                              | Bar:                 | 1         | 2         | 3         | 4         | 5         |
|-----------------------------------------------------------------------------------|----------------------|-----------|-----------|-----------|-----------|-----------|
| 081/081K                                                                          | (l/min)<br>(Gal/min) | 8<br>2.1  | 12<br>3.2 | 14<br>3.7 | 17<br>4.5 | 19<br>5.0 |
| 081D                                                                              | (l/min)<br>(Gal/min) | 14<br>3.7 | 20<br>5.3 | 25<br>6.6 | 29<br>7.7 | 32<br>8.5 |
| 080W                                                                              | (l/min)<br>(Gal/min) | 23<br>6.1 | 33<br>8.6 | 40<br>11  | 46<br>12  | 52<br>14  |
|  | Max. 65°C. 150°F     |           |           |           |           |           |



## VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min



VR161K




VR161D




VR161F

080W: Min. flow: 14 l/min - 3.7 Gal/min.

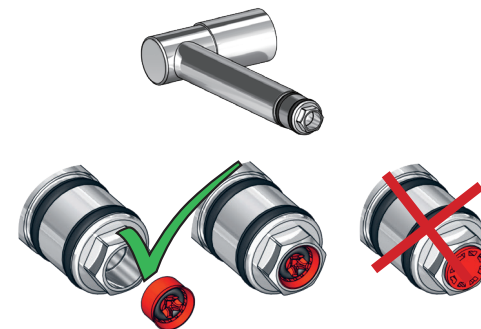


080

130 mm  
5"

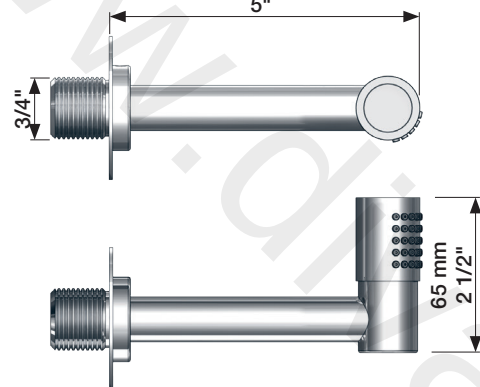


080D

130 mm  
5"

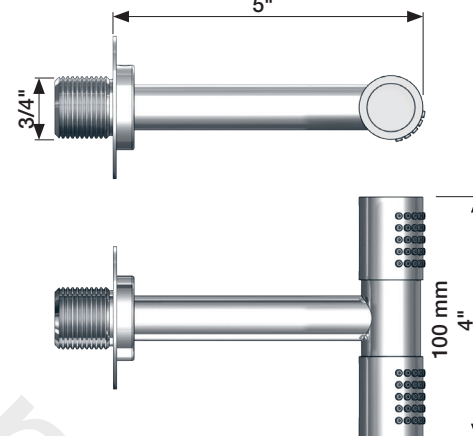


080DK

60 mm  
2 3/8"

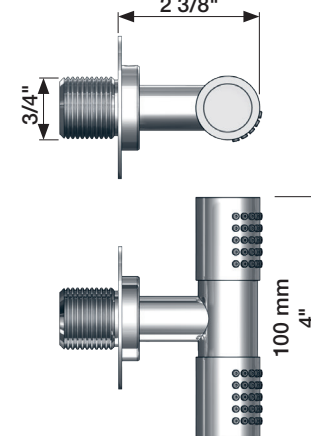


080K



60 mm  
2 3/8"

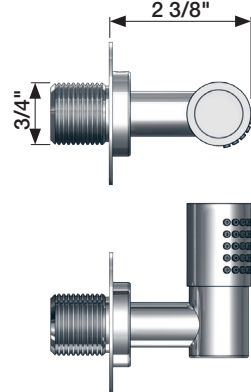

080W

270 mm  
10 5/8"

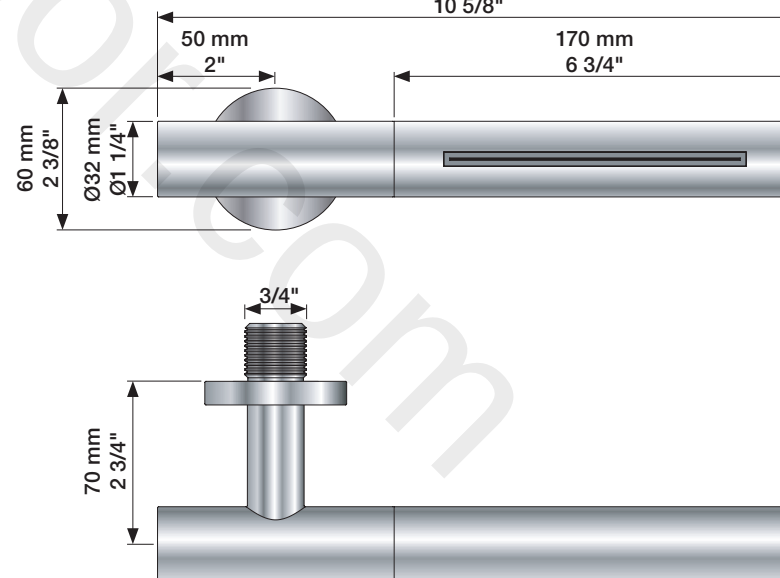

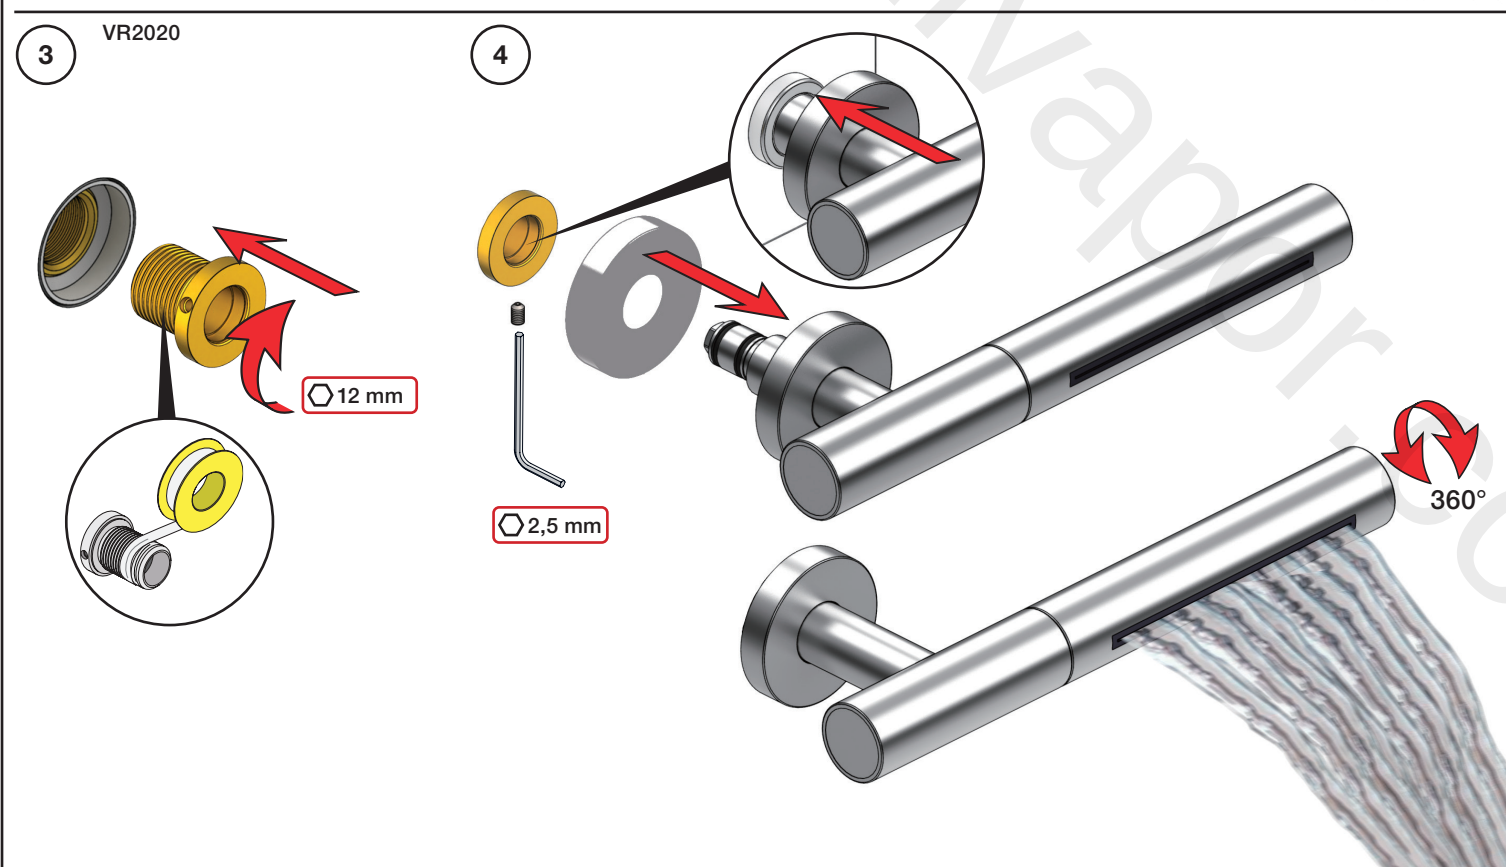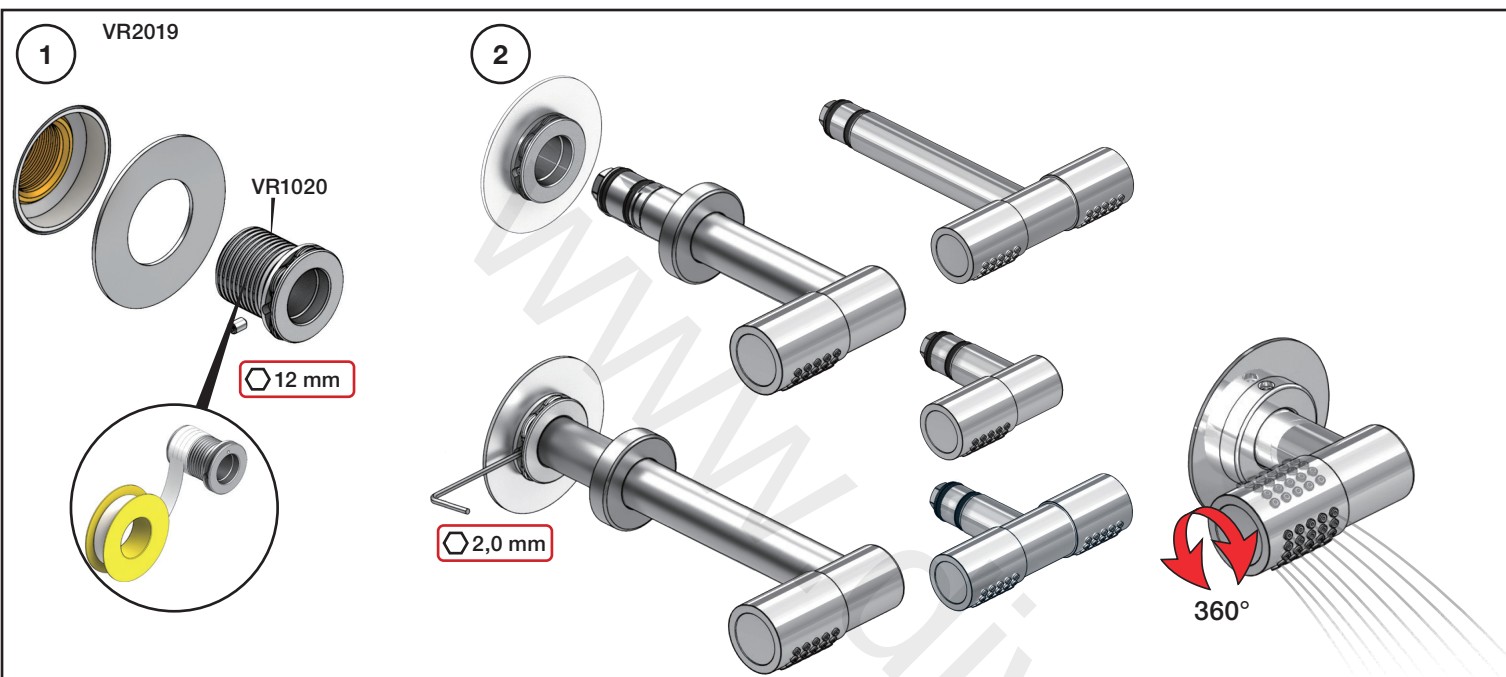

Extension  
Verlängerung


Forlængerdele  
Förlängning






Verlengstukken  
Modification

**T** Min. 3 mm  
Max. 65 mm


**Y** Min. 48 mm  
Max. 110 mm

| T          | Y           | VR2019/2020 |
|------------|-------------|-------------|
| 3 - 15 mm  | 110 - 98 mm | Std.        |
| 15 - 25 mm | 98 - 88 mm  | +10         |
| 25 - 35 mm | 88 - 78 mm  | +20         |
| 35 - 45 mm | 78 - 68 mm  | +30         |
| 45 - 55 mm | 68 - 58 mm  | +40         |
| 55 - 65 mm | 58 - 48 mm  | +50         |

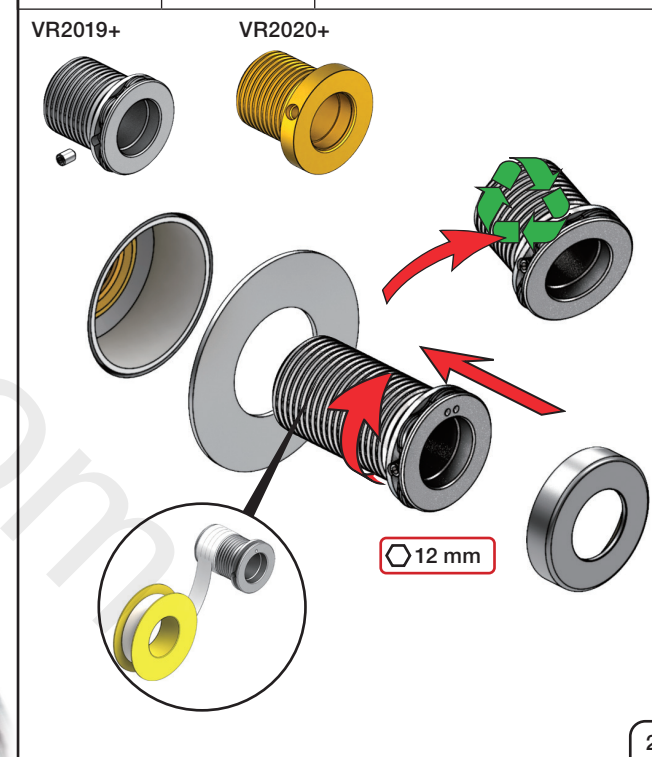

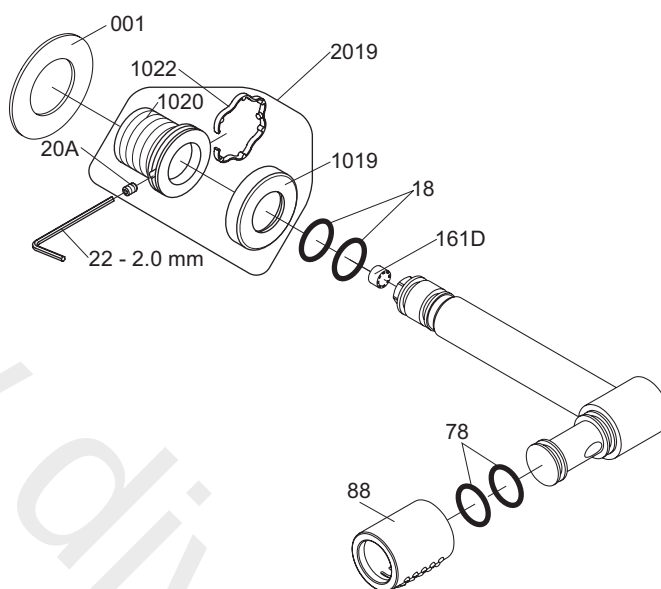

VR1020K    VR20A, VR22, VR1020, VR1022  
 VR2019:    VR20A, VR22, VR1019, VR1020, VR1022



**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

# **VOLA 080, 080K** **VOLA 080D, 080DK**

Date  
 Apr. 21

Rev.  
 3

Sheet  
 SB 17.3