


VOLA 5100, 5100X, 5200V, 5300  
VOLA 5400DV, 5400V, 5400NV & A3/A4  
VOLA 5400TV, 5400FV, 5400RV & A3/A4  
VOLA 5600V & A3/A4

Fitting instruction  
Montageanleitung  
Monteringsvejledning

Monteringsv gledning  
Montage hanleiding  
Manuel de montage


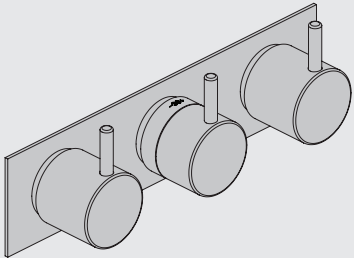


www.vola.com

5000\_V4\_40998504  
04-01-2023

5 705230 287317

|                                    | L                 | L1                | L2                | H               | H1              | D               |
|------------------------------------|-------------------|-------------------|-------------------|-----------------|-----------------|-----------------|
| 5400DV                             | 377 mm<br>14 3/4" | 260 mm<br>10"     | 268 mm<br>10"     | 95 mm<br>3 3/4" | 186mm<br>7 3/8" | 70 mm<br>2 3/4" |
| 5100, 5200V, 5300,<br>5400V, 5600V | 475 mm<br>19 3/4" | 355 mm<br>14"     | 367 mm<br>14 1/2" |                 |                 |                 |
| 5100X, 5400NV, 5400TV              | 552 mm<br>21 3/4" | 435 mm<br>17"     | 447 mm<br>17 5/8" |                 |                 |                 |
| 5400FV, 5400RV                     | 630 mm<br>25 1/2" | 514 mm<br>20 3/8" | 522 mm<br>20 1/2" |                 |                 |                 |

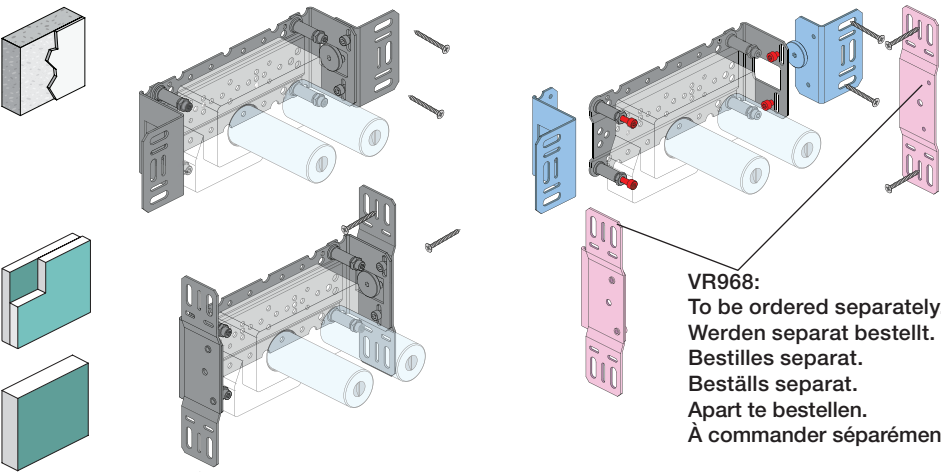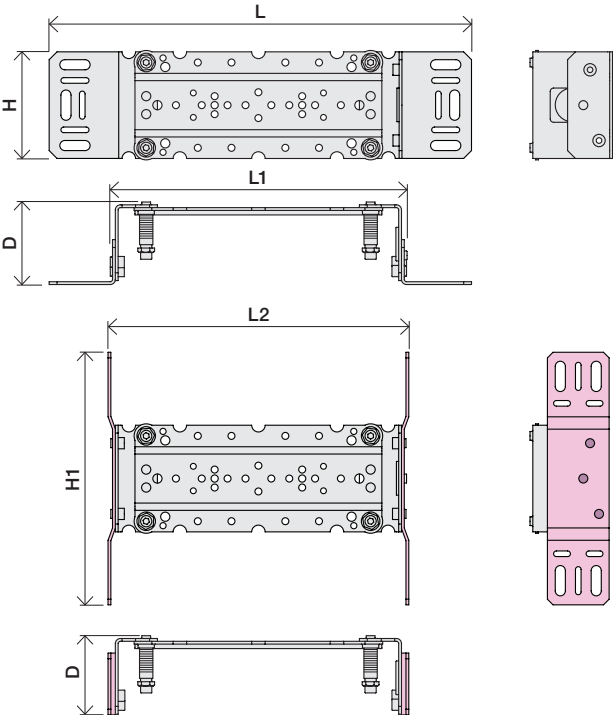

VR968:  
To be ordered separately.  
Werden separat bestellt.  
Bestilles separat.  
Apart te bestellen.  
  commander s par ment.

**A** Max.: 10 Bar/145 psi  
Max. 65 C, 150 F

USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

5100/5200V/5300: **A** 5400/5600A3: **A** - **C**

5400/5600: **A** - **B** 5400/5600A4: **A** - **D**

| 5400<br>5600 | 5400A3<br>5600A3 | 5400A4<br>5600A4 |          |          |          |          |          |          |          |
|--------------|------------------|------------------|----------|----------|----------|----------|----------|----------|----------|
| - 2          | 1 2              | 1 2              | <b>A</b> | <b>M</b> | <b>B</b> | <b>M</b> | <b>C</b> | <b>M</b> | <b>D</b> |
| - 3          | - 3              | 4 3              |          |          |          |          |          |          |          |
| Out 2        | Out 1            | Out 1            | 32/(8.5) | 16/(4.2) | -        | -        | -        | -        | -        |
| Out 3        | Out 2            | Out 2            | -        | -        | 32/(8.5) | 16/(4.2) | -        | -        | -        |
| -            | Out 3            | Out 3            | -        | -        | -        | -        | 32/(8.5) | 16/(4.2) | -        |
| -            | -                | Out 4            | -        | -        | -        | -        | -        | -        | 32/(8.5) |

**B** Check the local legislation.  
Bitte die  rtlichen Vorschriften  berpr fen.  
Tjek de lokale regler.  
Kontrollera lokala f reskrifter  
Nazitten lokale regelgeving.  
V rifiez la l gislation locale.

**!DO NOT!  
!REMOVE!**

**C** DE: Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

**D** Box till inbyggnadsblandare.  
Boks til indbygningsblander.  
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.  
Ikke inkludert, k pes separat.  
Eiv t sis lly tilaukseen, ostettava erikseen.

200M  
PEX1

Extension  
Verl ngerung  
Forl ngerdele  
F rl ngning  
Aanpassing  
Modification

Min. 3 mm  
Max 65 mm

Min. 48 mm  
Max. 110 mm

Y

STANDARD  
+10  
+20  
+30  
+40  
+50  
DO NOT REMOVE

|                                                                                     | T          | Y           | VR5250/VR5410/VR2019 |
|-------------------------------------------------------------------------------------|------------|-------------|----------------------|
|  | 3 - 15 mm  | 110 - 98 mm | Std.                 |
|                                                                                     | 15 - 25 mm | 98 - 88 mm  | +10                  |
|                                                                                     | 25 - 35 mm | 88 - 78 mm  | +20                  |
|                                                                                     | 35 - 45 mm | 78 - 68 mm  | +30                  |
|                                                                                     | 45 - 55 mm | 68 - 58 mm  | +40                  |
|                                                                                     | 55 - 65 mm | 58 - 48 mm  | +50                  |

Fitting of extension  
Montage von verl ngerung  
Montering af forl ngerdele  
Montering av f rl ngning

VR5250

VR2019+, VR2119+

VR5410

5400:  
5600:

5400A3/A4:  
5600A3/A4:

32 mm

14 mm

Extension, retrofit  
Verl ngerung, nachtr glicher Einbau  
Forl ngerdele, eftermontering  
F rl ngning, eftermontering  
Aanpassing na montage  
Modification apr s installation

X 52 - 0 mm

X -15 - 0 mm

|                                                                                     | X           | VR5250/VR5410/VR2019 |
|-------------------------------------------------------------------------------------|-------------|----------------------|
|  | 37 - 49 mm  | Std.                 |
|                                                                                     | 27 - 37 mm  | +10                  |
|                                                                                     | 17 - 27 mm  | +20                  |
|                                                                                     | 7 - 17 mm   | +30                  |
|                                                                                     | -3 - 7 mm   | +40                  |
|                                                                                     | -13 - -3 mm | +50                  |

Montage van de verlengstukken  
Montage des rallonges

VR2019+, VR2119+

  12 mm

5400/5600:

5400A3/ 5600A3:


5400A4:

5600A4:

VR5411


32 mm

14 mm

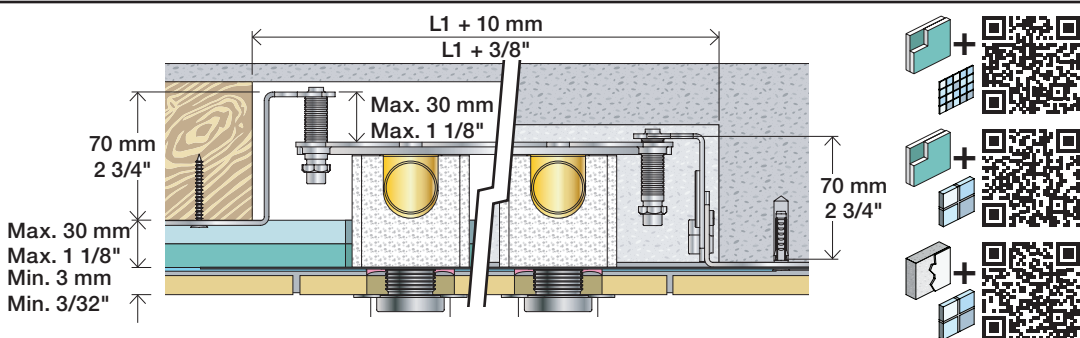

**2x13 mm** Lightweight wall  
Leichtwand  
Let væg


Lätta konstruktion  
Holle wandconstructie  
Construction légère

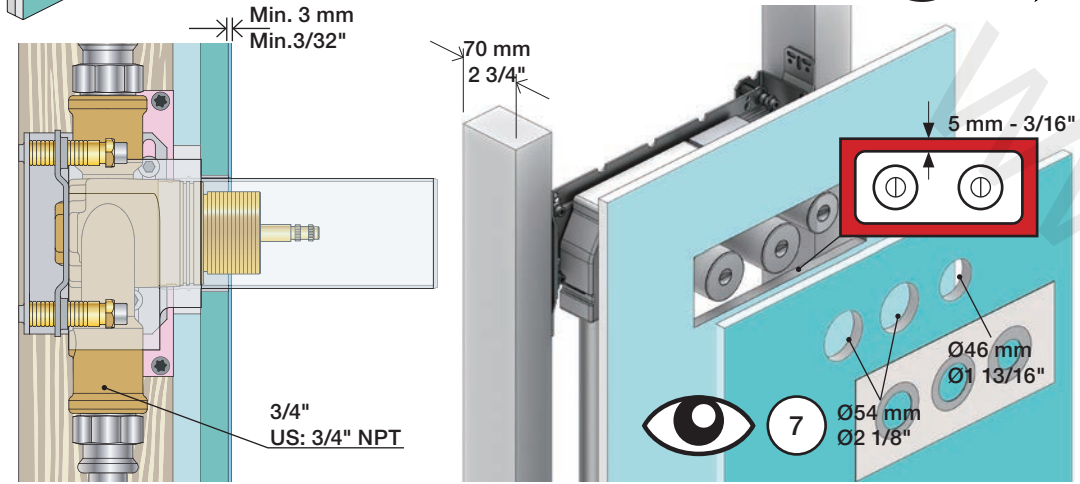

**1x15 mm**  
**1x18 mm**  
**1x20 mm**


Lightweight wall  
Leichtwand  
Let væg

Lätta konstruktion  
Holle wandconstructie  
Construction légère

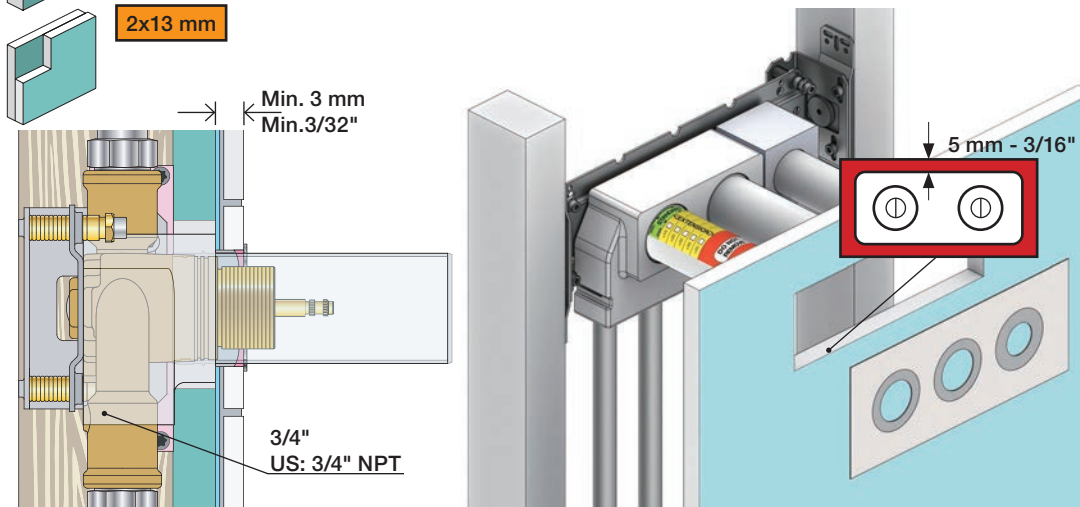

**Masonry**  
**Mauerwerk**  
**Murværk**

**Murverk**  
**Massieve wand**  
**Mur Plein**

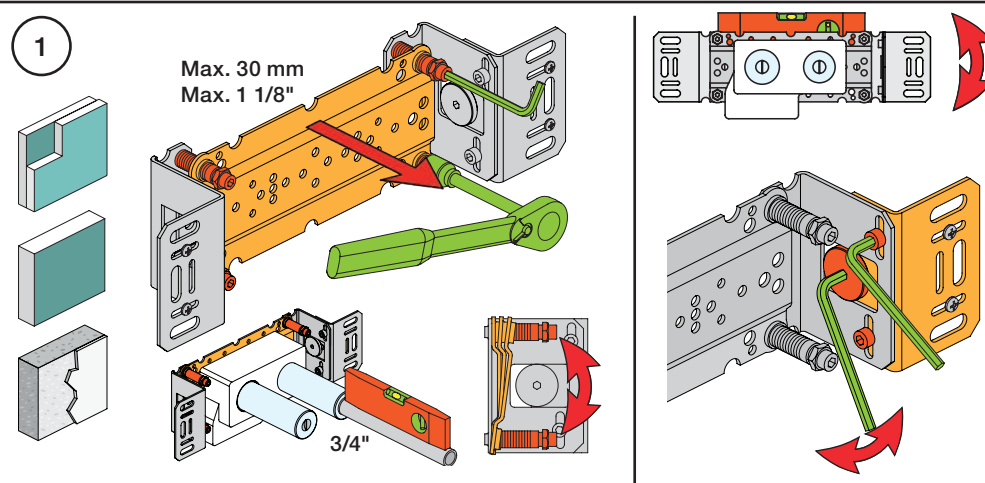








**2** Test Pressure  
Prüfdruck  
testtryk  
Test tryck  
Test druk  
test de pression

Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter.  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.


**1. MAX. 16 Bar 232 Psi**

**2. MAX. 4 Bar 58 Psi**

**! Water - Wasser - Vand - Vatten - Water - L'eau**  
**! MAX 1 Minute - Minut - Minuut !**

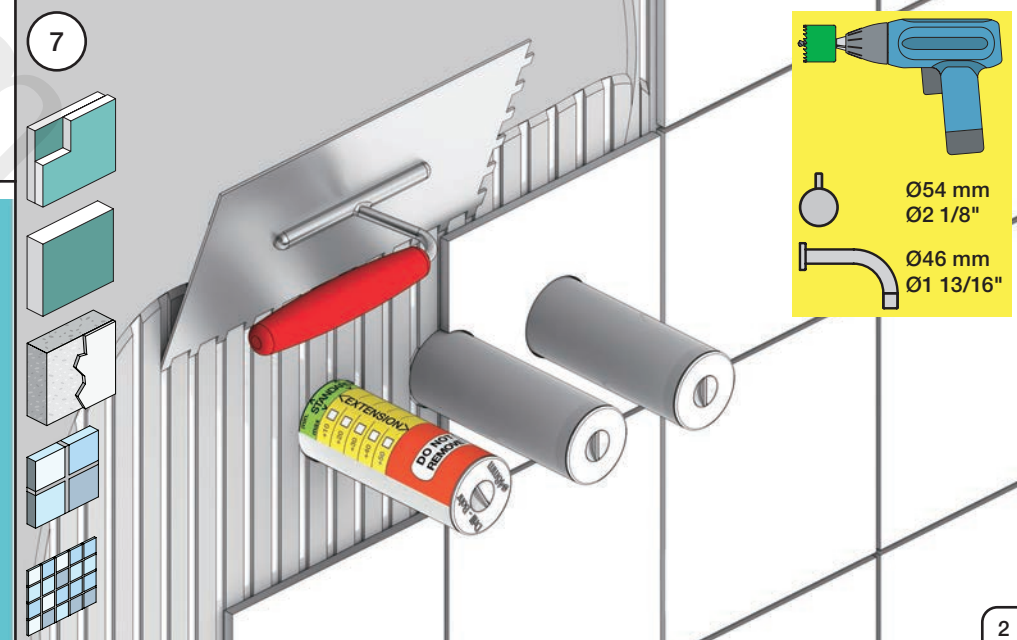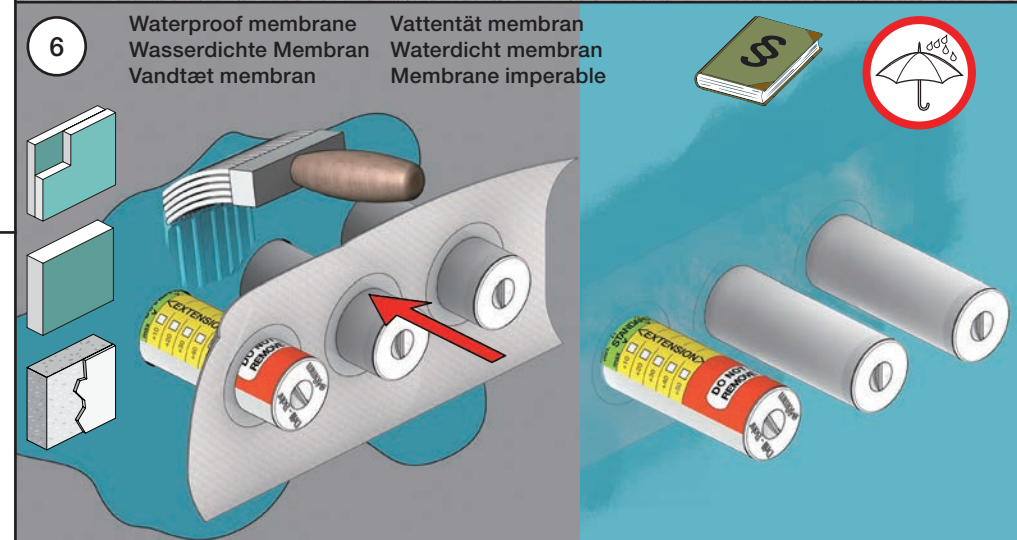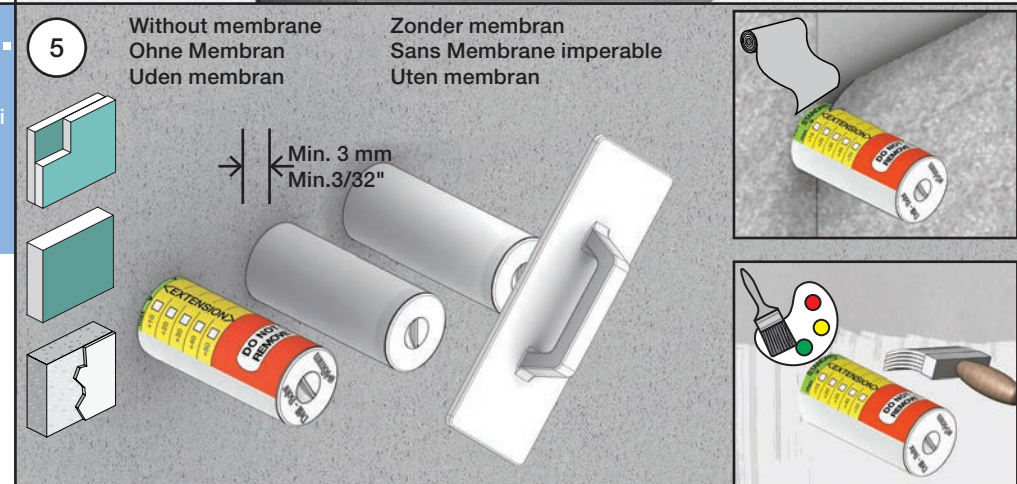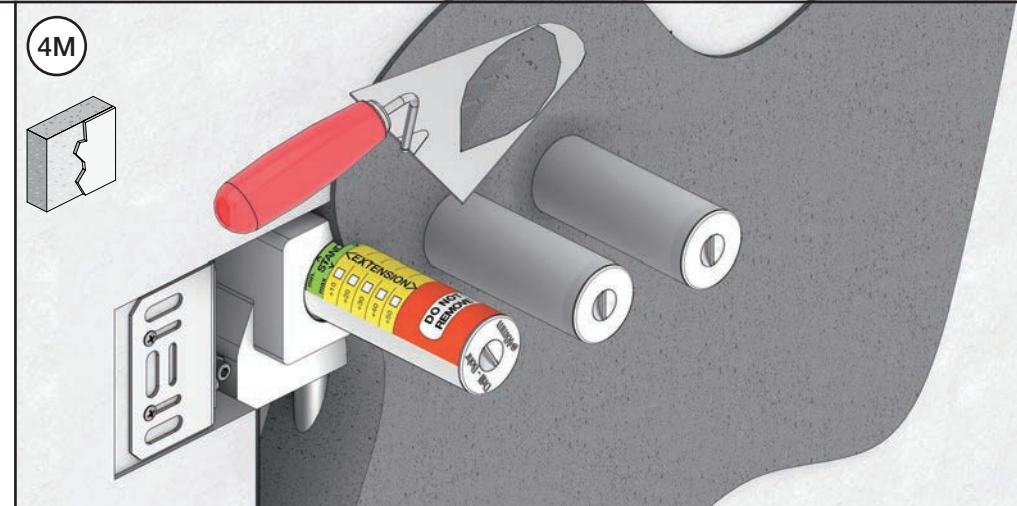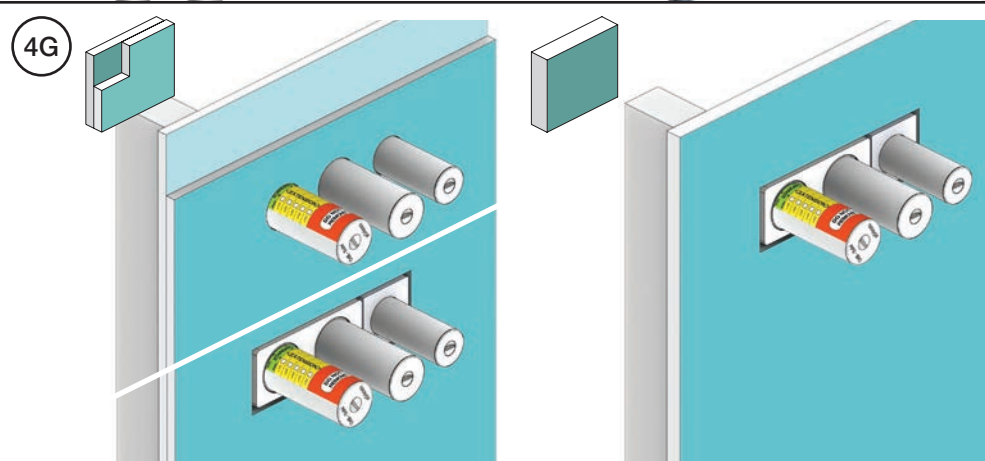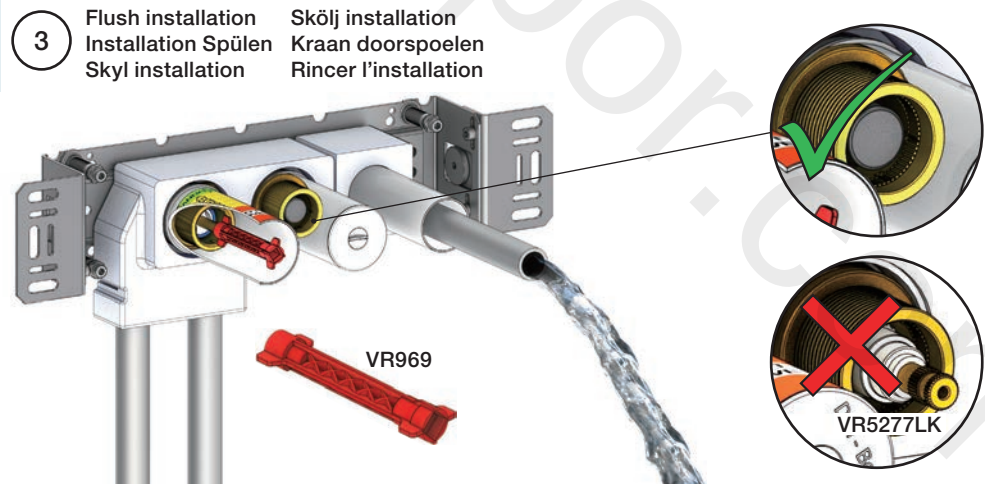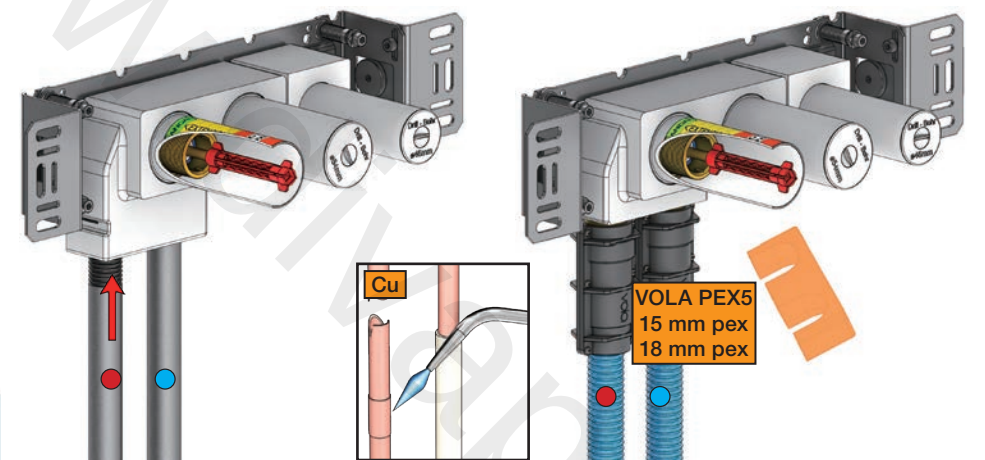

5400VA3

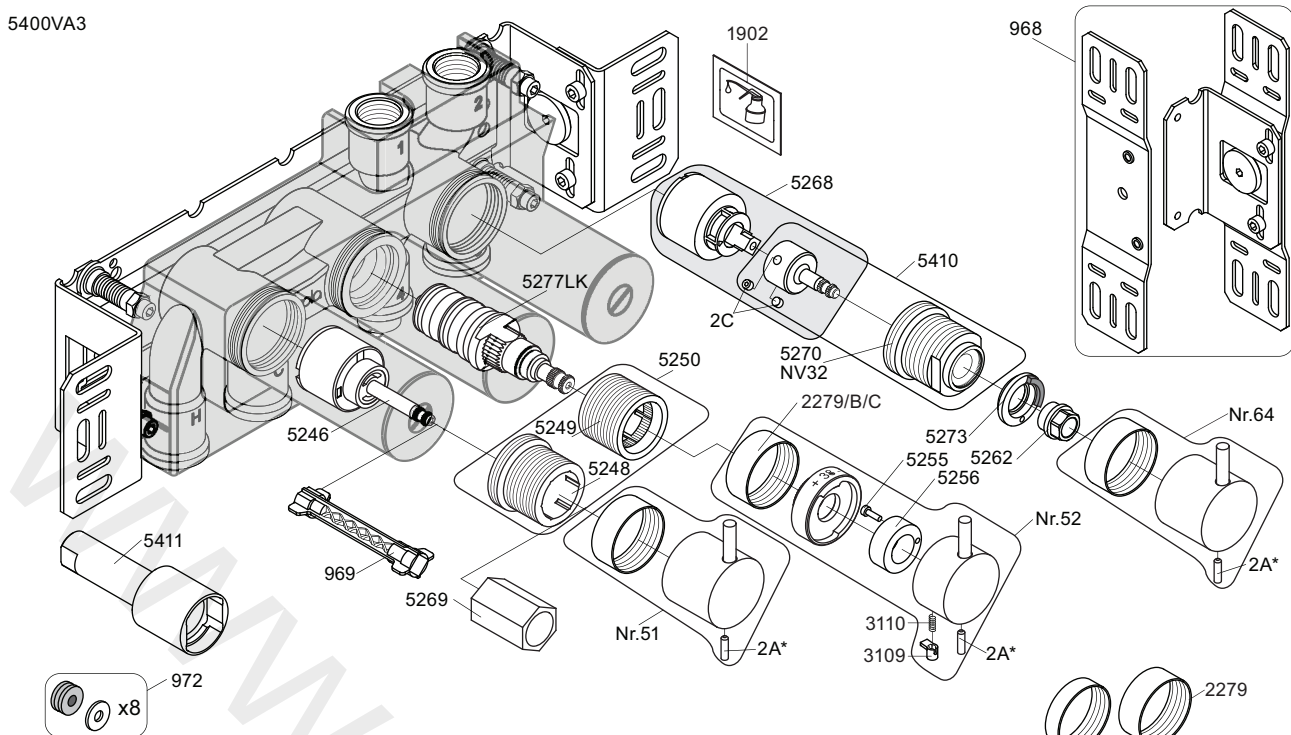

|       |       |       |       |                                                                                             |
|-------|-------|-------|-------|---------------------------------------------------------------------------------------------|
| 5250+ | 5410+ | 5268+ | 1902  | 2A*  Color                                                                                  |
|       |       |       |       | VR2A-Steel: Standard<br>VR2A-F60: F17-F27-F60<br>VR2A-F63: F63-F64<br>VR2A-F65: F19-F65-F70 |
| 5248+ | 5249+ | 5257+ | 5258+ |                                                                                             |
|       |       |       |       |                                                                                             |
| 5259+ | 5260+ | 5268+ | 5270+ |                                                                                             |
|       |       |       |       |                                                                                             |

|          |                                                        |
|----------|--------------------------------------------------------|
| NR51:    | VR5251, VR2279+B+C, VR2A                               |
| NR52:    | VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR2A |
| NR64:    | VR5251, VR2279+B+C, VR2A                               |
| VR3113:  | VR3109, VR3110, VR5255                                 |
| VR5250+: | VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260       |
| VR5257+: | VR5257+, VR5259+                                       |
| VR5258+: | VR5258+, VR5260+                                       |
| VR5268+: | 2xVR2C, VR1902, VR5268                                 |
| VR5410+: | 2xVR2C, VR5270+                                        |

|                    |                      |                      |          |
|--------------------|----------------------|----------------------|----------|
| 5400VA3<br>5600VA3 | 5400NVA3<br>5400TVA3 | 5400FVA3<br>5400RVA3 | 5400DVA3 |
|                    |                      |                      |          |
| 2929               | 2930                 | 2929                 | 2934     |
|                    |                      |                      |          |
| 5003B              | 5004B                | 5004L                |          |
|                    |                      |                      |          |
| 3x2001             | 3x2001, 001          | 3x2001, 001          | 2001     |



**vola**  
Lunavej 2  
DK-8700 Horsens  
Tlf : + 45 7023 5500  
sales@vola.com  
www.vola.com

**VOLA 5400VA3**  
5400FVA3, 5400NVA3  
5400RVA3, 5400TVA3  
5600VA3

Date  
May 22

Rev.  
6

Sheet  
SB 10.54