




voilà





5 705230 287317

[illegible] USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)


Y Min. 48 mm
Max. 110 mm

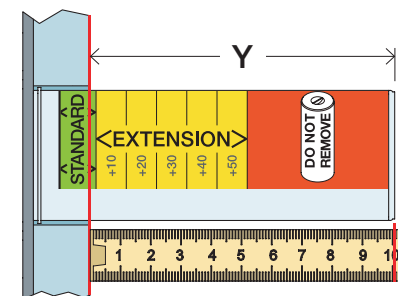

VR5250





This exploded view diagram shows the components of the VR5250 valve assembly. Red arrows indicate the assembly sequence. Green recycling symbols are placed over the two main brass body components, indicating they are made of recyclable material.

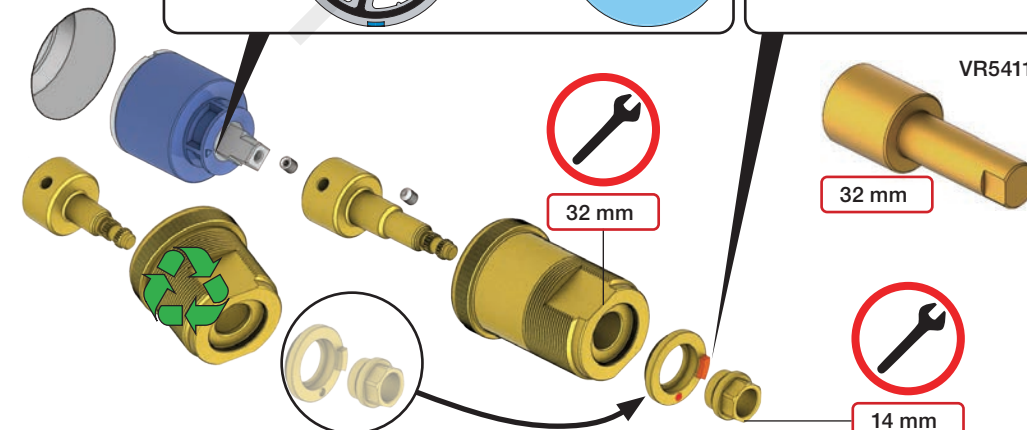


X₅₂ - 0 mm

X_{-15 - 0 mm}



VR2019+, VR2119+

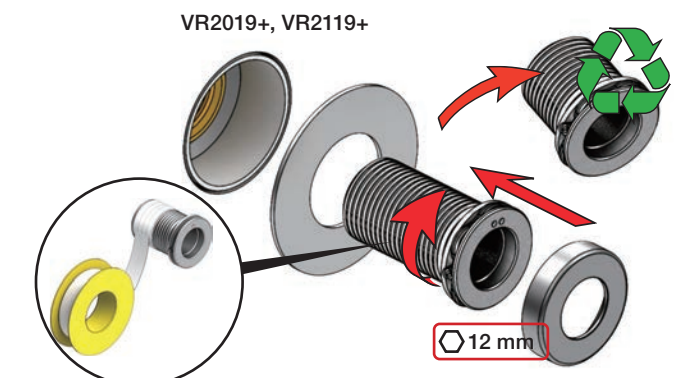

5400/5600: 5400A3/ 5600A3: 5400A4:

5600A4:




VR541

32 mm




14 mm

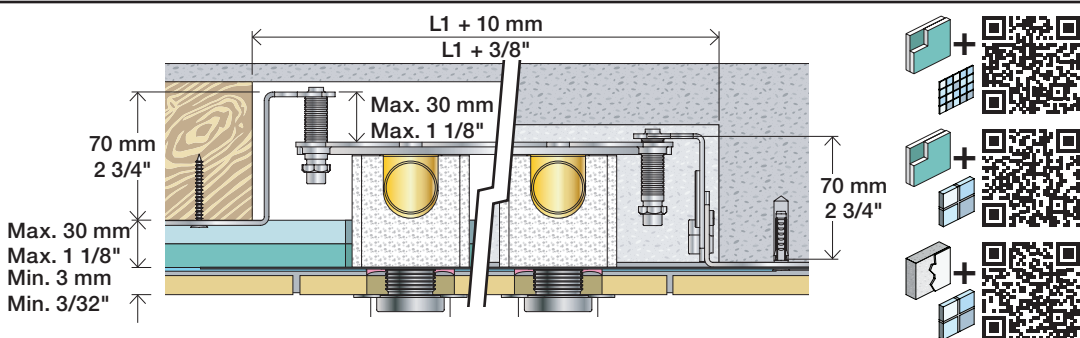

2x13 mm Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

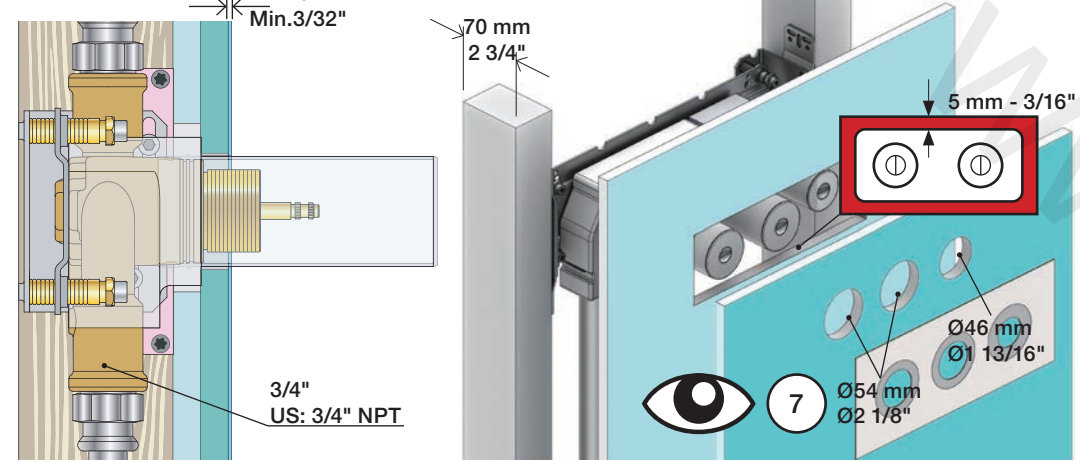

1x15 mm
1x18 mm
1x20 mm
2x13 mm


Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

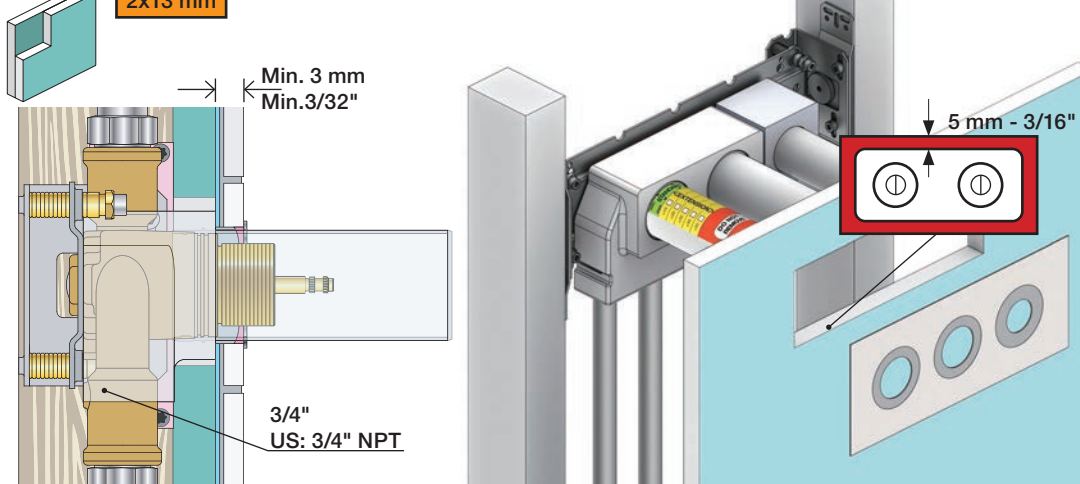

Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein







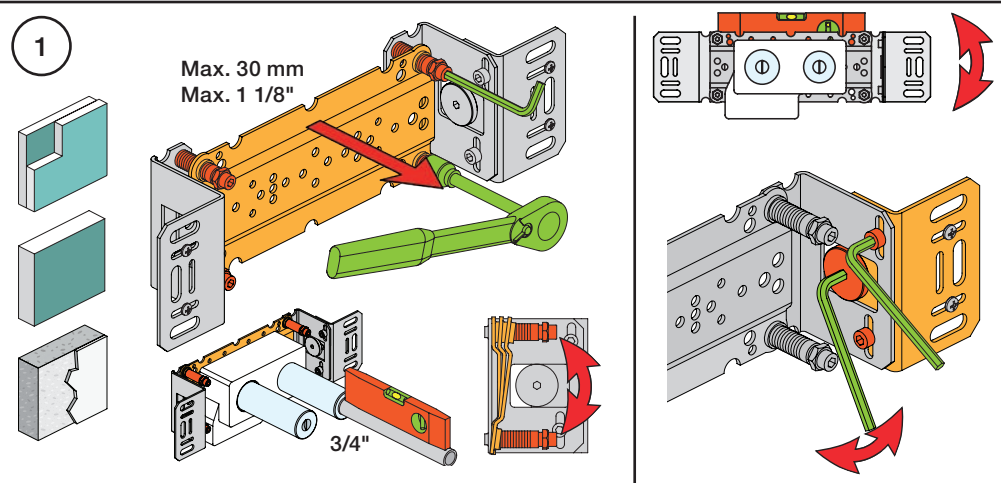


2 Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression


Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

1. MAX. 16 Bar 232 Psi
2. MAX. 4 Bar 58 Psi


! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

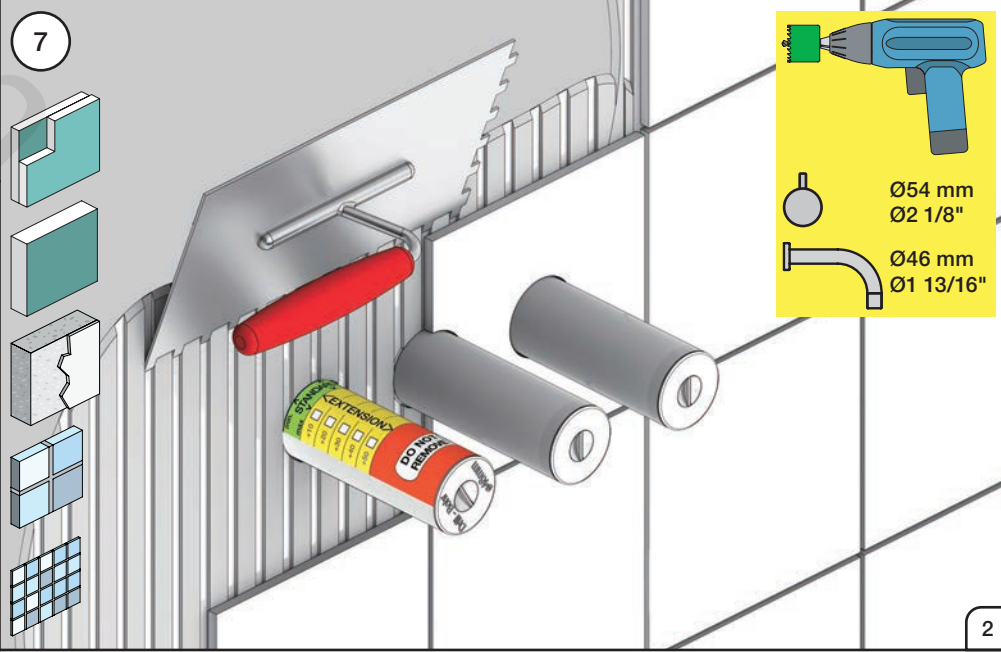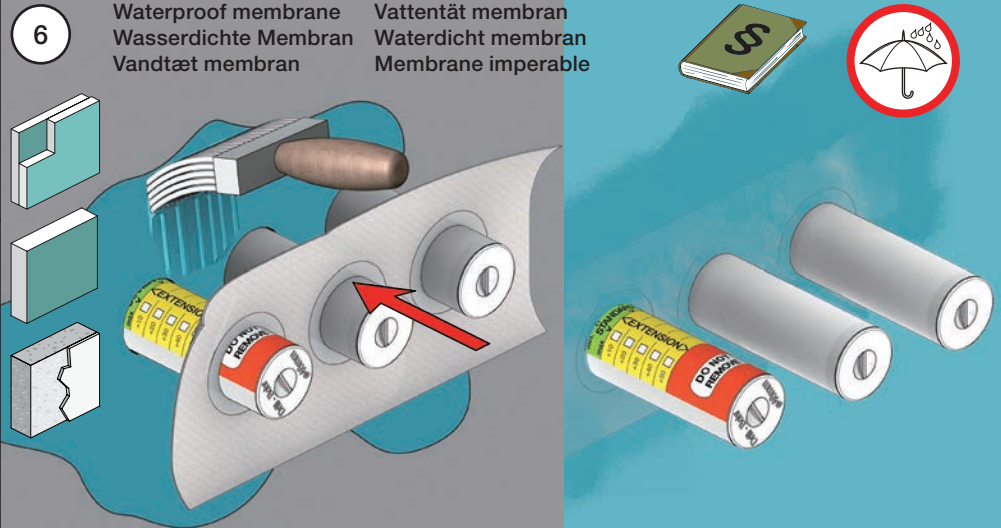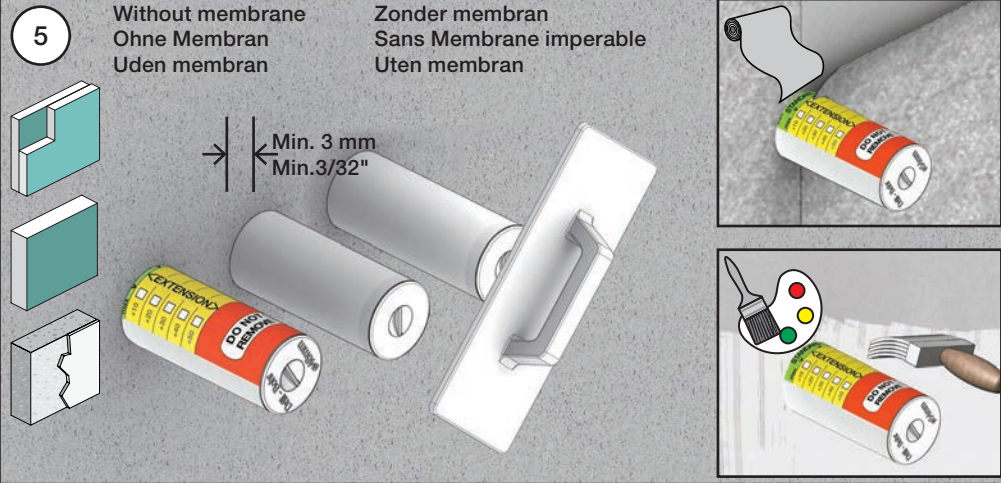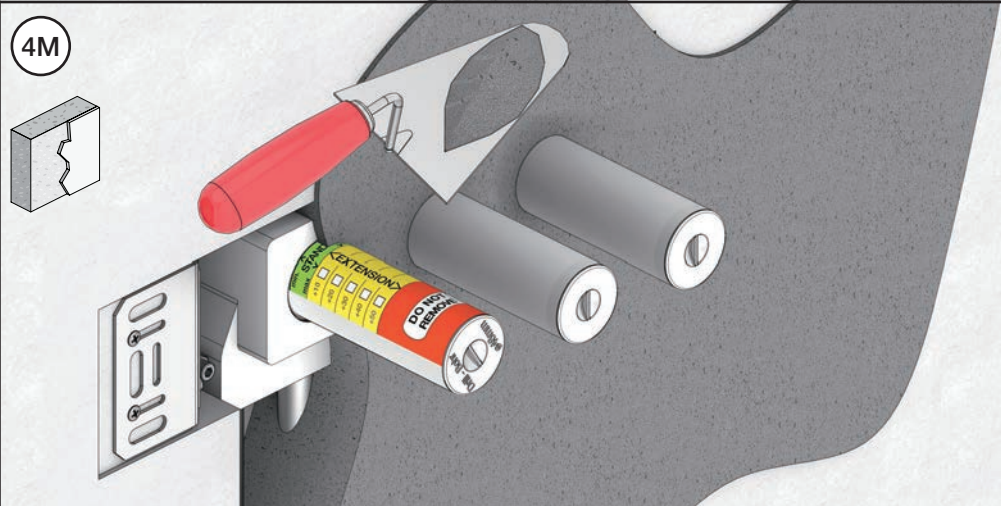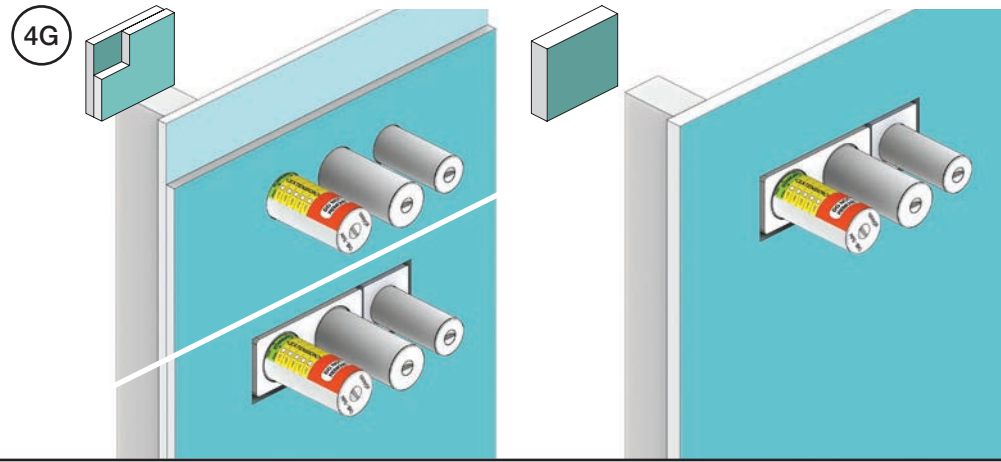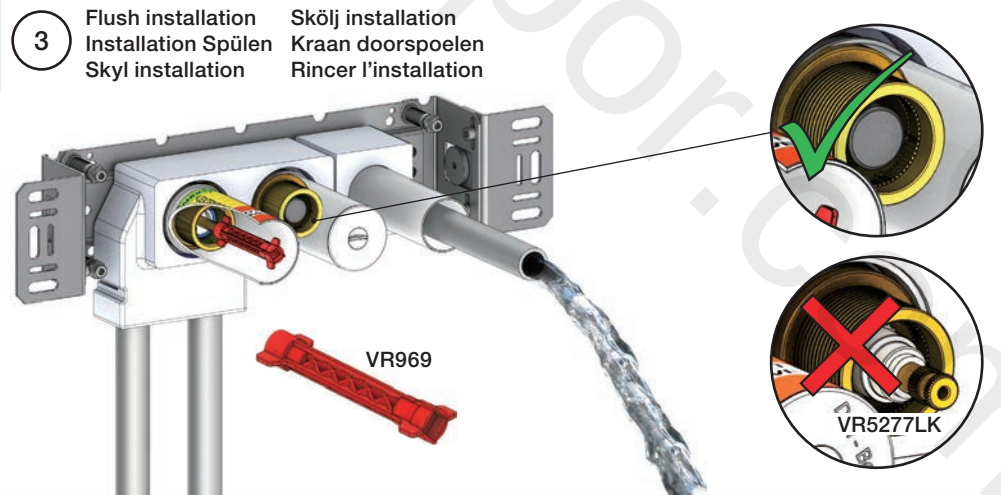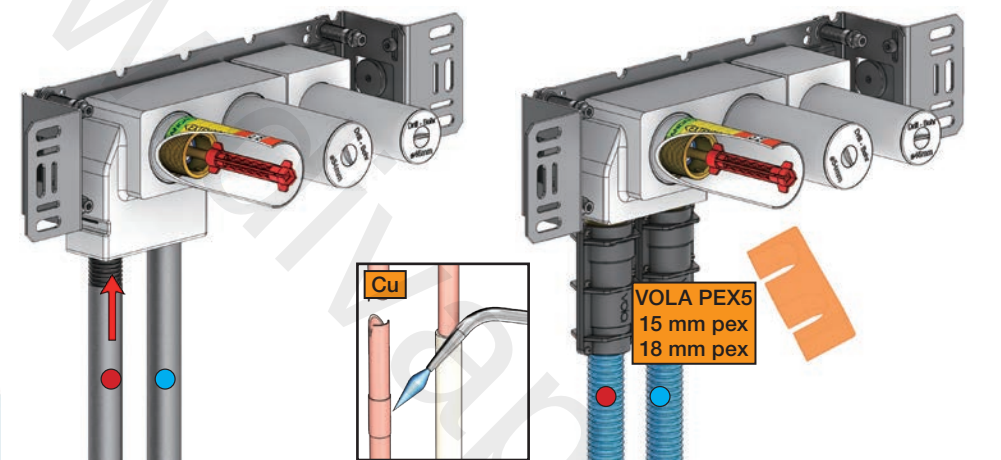

5400VA3

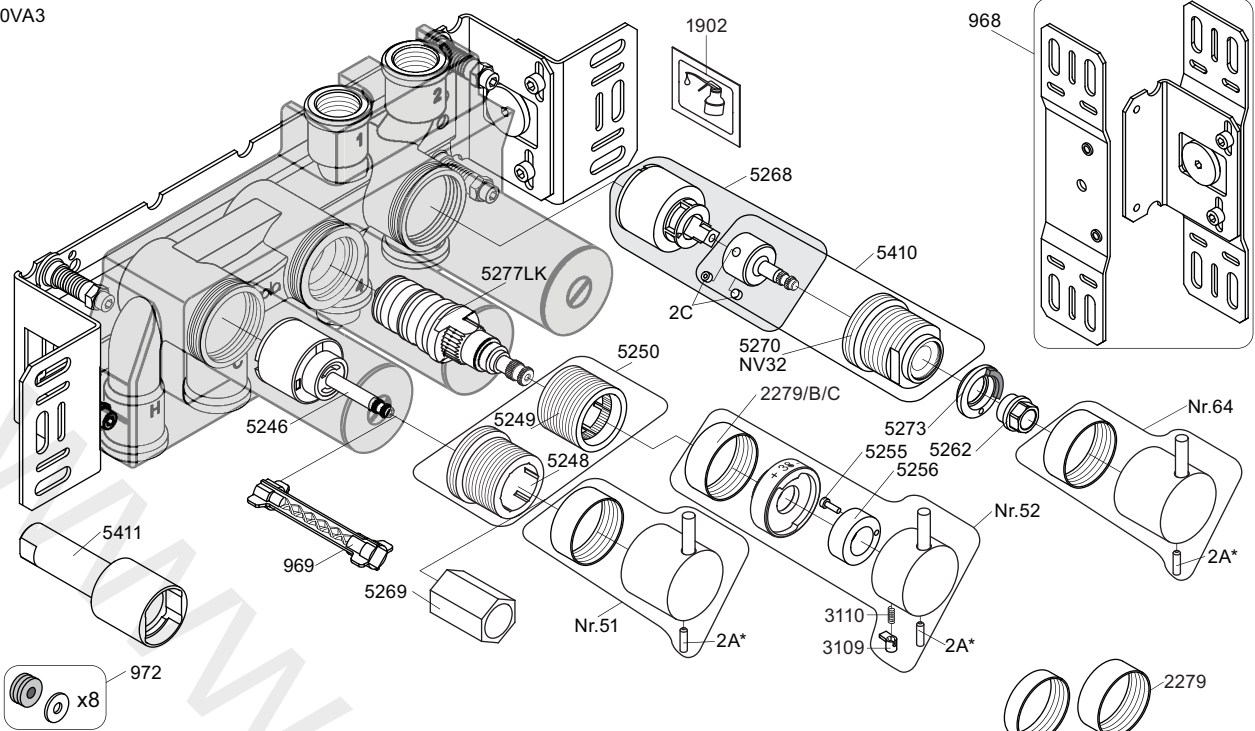

5250+ 5248+ 5249+ 5257+ 5258+ 5259+ 5260+ 5269	5410+ 5270+ 2C	5268+ 1902 2C	2A* Color VR2A-Steel: Standard VR2A-F60: F17-F27-F60 VR2A-F63: F63-F64 VR2A-F65: F19-F65-F70
---	----------------------	---------------------	---



NR51:	VR5251, VR2279+B+C, VR2A
NR52:	VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR2A
NR64:	VR5251, VR2279+B+C, VR2A
VR3113:	VR3109, VR3110, VR5255
VR5250+:	VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+:	VR5257+, VR5259+
VR5258+:	VR5258+, VR5260+
VR5268+:	2xVR2C, VR1902, VR5268
VR5410+:	2xVR2C, VR5270+

5400VA3 5600VA3 2929	5400NVA3 5400TVA3 2930	5400FVA3 5400RVA3 2929	5400DVA3 2934
 5003B	 5004B	 5004L	
 3x2001	 3x2001, 001	 3x2001, 001	 2001



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5400VA3
5400FVA3, 5400NVA3
5400RVA3, 5400TVA3
5600VA3

Date
May 22
Rev.
6
Sheet
SB 10.54