




voilà

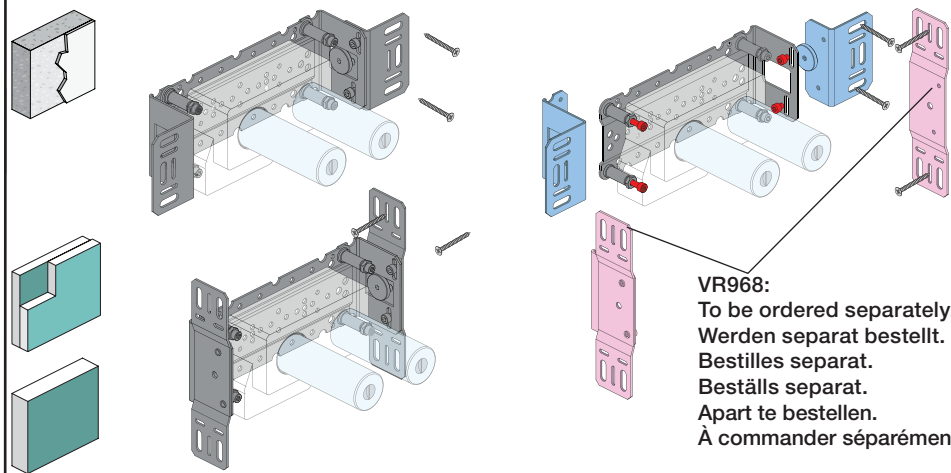

5 705230 287317

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)


5100/5200V/5300:  5400/5600A3:  - 

5400/5600:  -  5400/5600A4:  - 


B Check the local legislation.
 Bitte die örtlichen Vorschriften überprüfen.
 Tjek de lokale regler.
 Kontrollera lokala föreskrifter
 Nazitten lokale regelgeving.
 Vérifiez la législation locale.





**!DO NOT!
!REMOVE!**



PEX1

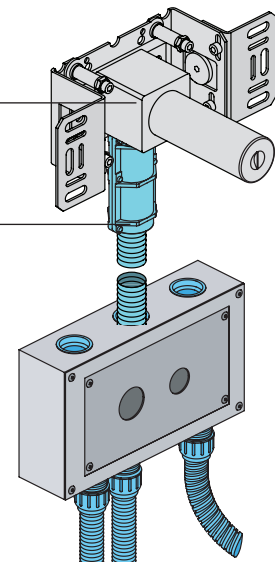


Y Min. 48 mm
Max. 110 mm

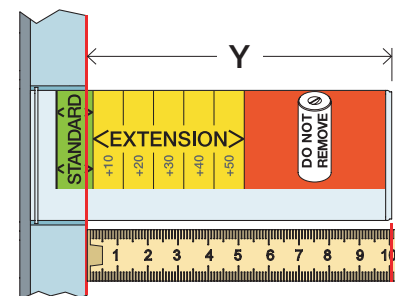

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Montering af forlængerdele
Montering av förlängning

VR2019+, VR2119+

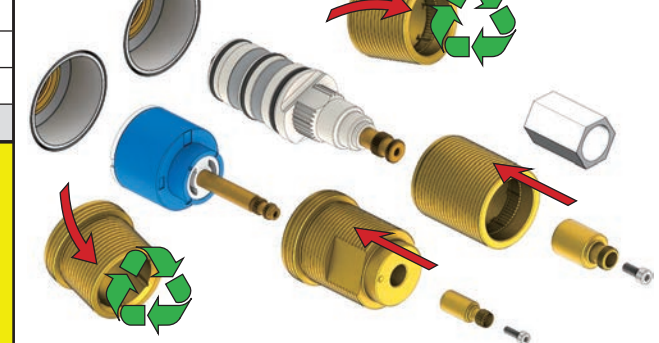


5400:
5600:

5400A3/A4:
5600A3/A4:



1 2
4 3

1 2
4 3

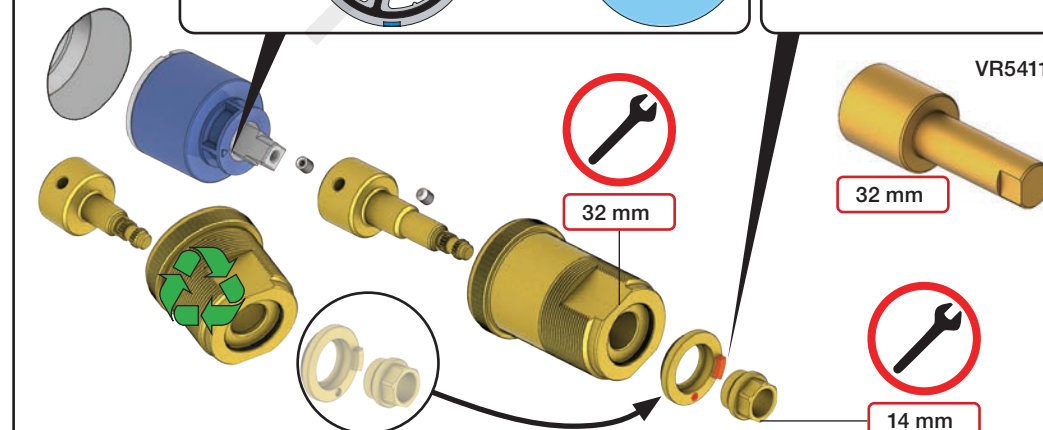


X₅₂ - 0 mm

X_{-15 - 0 mm}




	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges

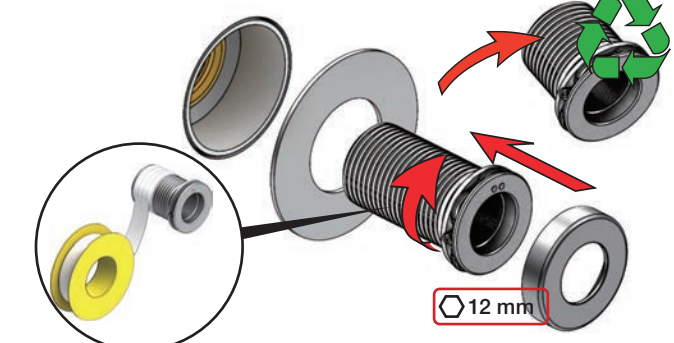



5400/5600: 5400A3/ 5600A3: 5400A4:

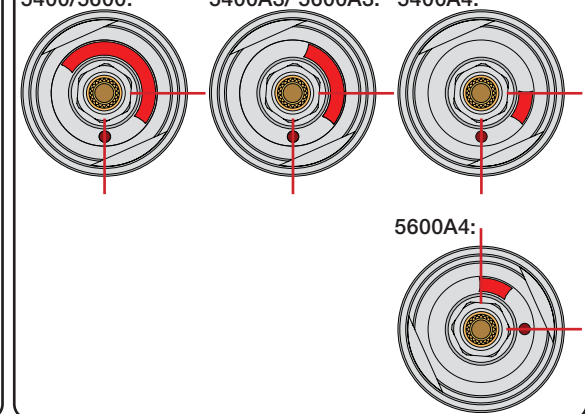


VR5411

32 mm


14 r

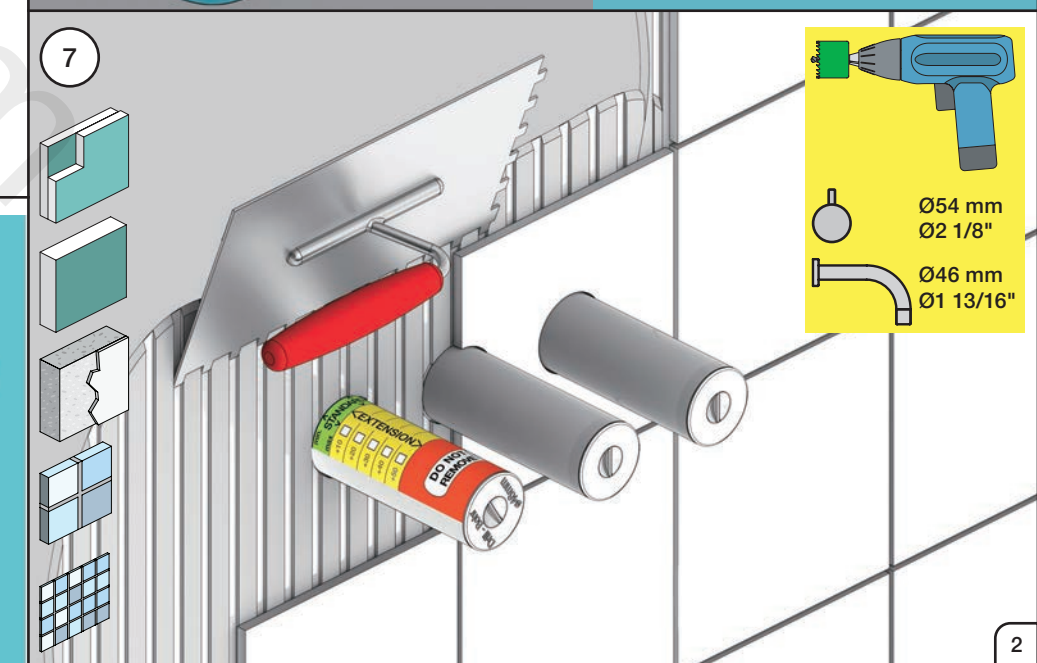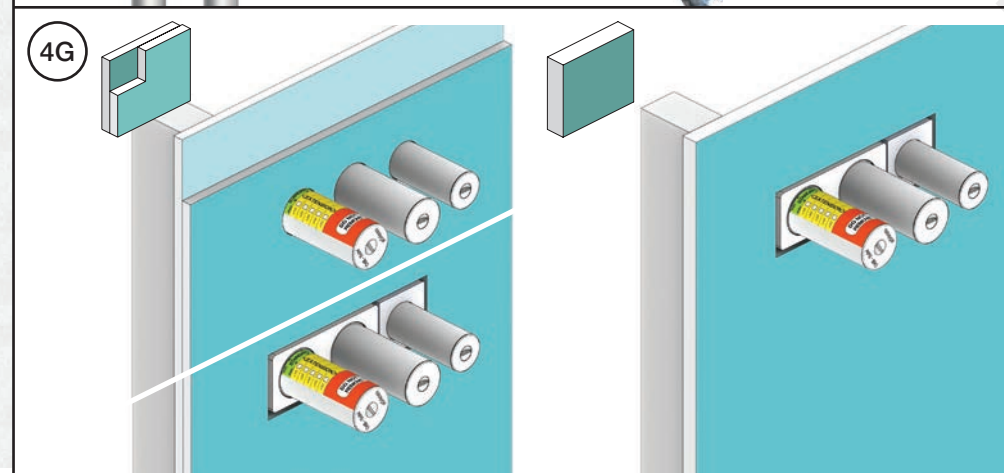

5400VA3

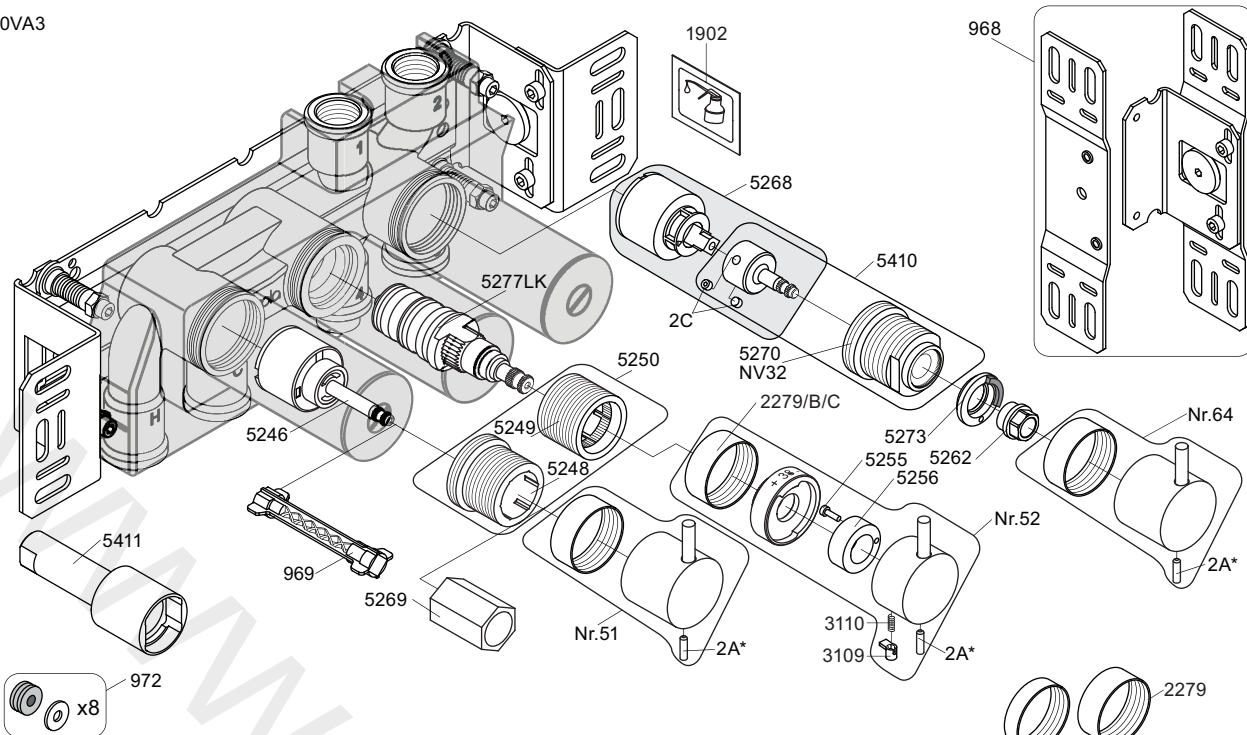


5250+ 5248+ 5249+ 5257+ 5258+ 5259+ 5260+	5410+ 2C 5270+	5268+ 2C 1902	2A* Color VR2A-Steel: Standard VR2A-F60: F17-F27-F60 VR2A-F63: F63-F64 VR2A-F65: F19-F65-F70
---	----------------------	---------------------	---



NR51:	VR5251, VR2279+B+C, VR2A
NR52:	VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR2A
NR64:	VR5251, VR2279+B+C, VR2A
VR3113:	VR3109, VR3110, VR5255
VR5250+:	VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+:	VR5257+, VR5259+
VR5258+:	VR5258+, VR5260+
VR5268+:	2xVR2C, VR1902, VR5268
VR5410+:	2xVR2C, VR5270+

5400VA3 5600VA3 2929	5400NVA3 5400TVA3 2930	5400FVA3 5400RVA3 2929	5400DVA3 2934
 5003B	 5004B	 5004L	
 3x2001	 3x2001, 001	 3x2001, 001	 2001



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5400VA3
5400FVA3, 5400NVA3
5400RVA3, 5400TVA3
5600VA3

Date
May 22

Rev.
6

Sheet
SB 10.54