TECHNICAL DATA SHEET



showering

NABIS

NABIS THERMOSTATIC SURFACE MOUNTED SHOWER VALVE WITH ADJUSTABLE RISER

Product Specification

Product Code: D01190
Finish: Chrome
Product Type: Contemporary

Construction: Body is of brass construction Thermostatic Cartridge

Supply: Suitable for all plumbing systems (preferably balanced)

Inlet Connections: 15mm compression elbows

Outlet Connection: G ½

Working Pressures: Min 0.1bar, Max 5.0bar Dimensions for Fitting: 148-152mm inlet centres



Additional Information

- Single lever control flow & temperature are controlled by an easily operated single handle.
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature & pressure providing a stable outlet temperature.
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of injury.
- Factory set to a maximum of 41^oC to eliminate the ability to select an unsafe temperature, this can be adjusted to suit user preference.
- Supplied with 1.5m shower hose, soap dish, riser rail, hose retainer & single function handset with rub clean nozzles.
- · Chrome plated to BS EN 248.

Technical Advice: For further information please call 0844 811 7658 or visit www.wolseley.co.uk

Guarantee: 5 years covering manufacturing faults.

Flow Rates (litres per minute, open outlet)

System Pressure (bar)	0.2	0.4	0.5	0.6	1.0	2.0	3 .0	4.0	5.0
Open Outlet (Without Flow Regulators Mixed LPM	16.3	24.7	26.8		36.1	50.8	62.3		
Through Handset & Hose (Without Flow Regulators) Mixed LPM	3.6	5.7	6.5		9.8	14.6	18.7	22.0	25.2

Wolseley UK LTD Warwickshire CV31 3HH www.wolselev.co.uk




TECHNICAL DATA SHEET



NABIS

NABIS THERMOSTATIC SURFACE MOUNTED SHOWER VALVE WITH ADJUSTABLE RISER

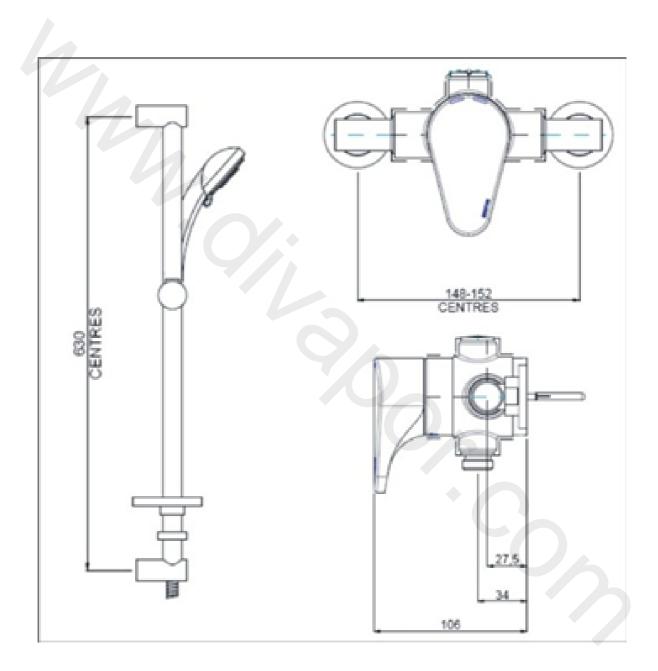

Technical Advice: For further information please call 0844 811 7658 or visit www.wolseley.co.uk **Guarantee:** 5 years covering manufacturing faults.

Wolseley UK LTD Warwickshire CV31 3HH www.wolseley.co.uk

