

# DSC SHC3DIV C

## DESCENT Shower Range

Descent Concealed Dual Control Valve  
with Diverter & Stopcock



### Features:

- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Fully serviceable from the front
- Metal back plate and handles for added durability
- Supplied with wall outlet

### Product Certifications:



WRAS Cert. Number: 2005900  
WRAS Expiry Date: 31/05/2025




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Dual Control
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

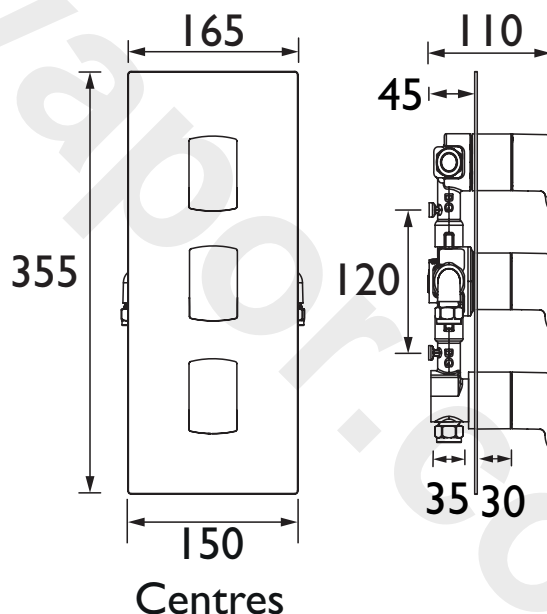

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1 (via CD Valve)	8.3	14.5	21.2	30	36.7	47.4
Outlet 2 (via Diverter)	6.7	12.4	18.5	26.2	32	41.4
Outlet 3 (via Diverter)	6.6	12.1	18	25.5	31.2	40.3

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D4