## inta



Enzo showers have been accredited TMV2 approval from BuildCert where you see this logo.

The constant circulation surface of the valves anti-scald thermostatic ensures the surface will never be hot to touch.

All Enzo bar showers technology.

Enzo showers have been of cold water under the feature inta's proven approved by WRAS where you see this logo.

**J**WRAS

Code

EN10036CP

## inta

## **Technical Specification:**

Min Inlet Pressure: 0.4 Bar (dynamic)

Max Inlet Pressure: 5 Bar (static)


Inlet Connections: <sup>3</sup>/<sub>4</sub>" (valve body)

Outlet Connection: G<sup>1</sup>/<sub>2</sub>" (top)

 $G^{1/2}$ " (bottom)

Factory Pre-set Temperature: 38°C

Min Inlet Temperature Differential: 15°C

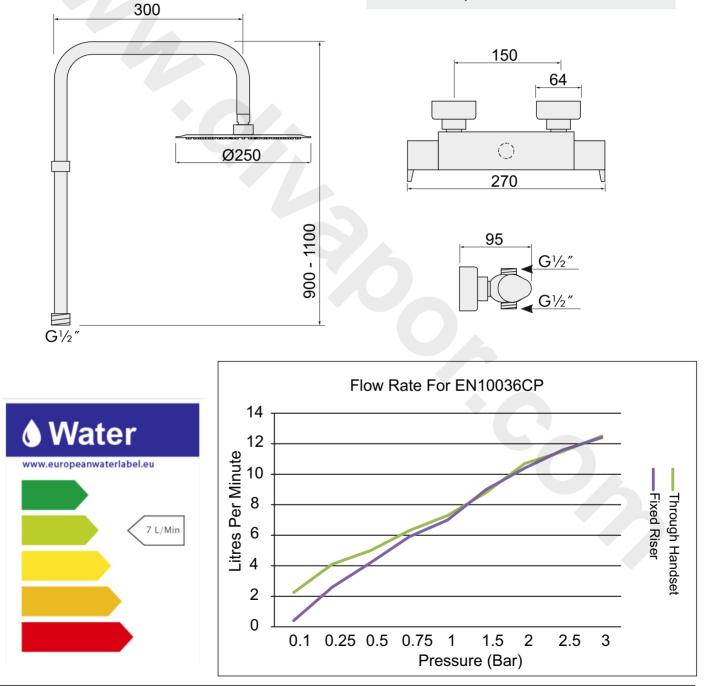

Intatec Ltd, Airfield Industrial Estate, Hixon, Staffordshire, ST18 OPF T: 01889 272180 F: 01889 272181 E: <u>sales@intatec.co.uk</u>W: <u>www.intatec.co.uk</u>