


VOLA FS1 & FS5

Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsvægledning
Montage hanleiding
Manuel de montage

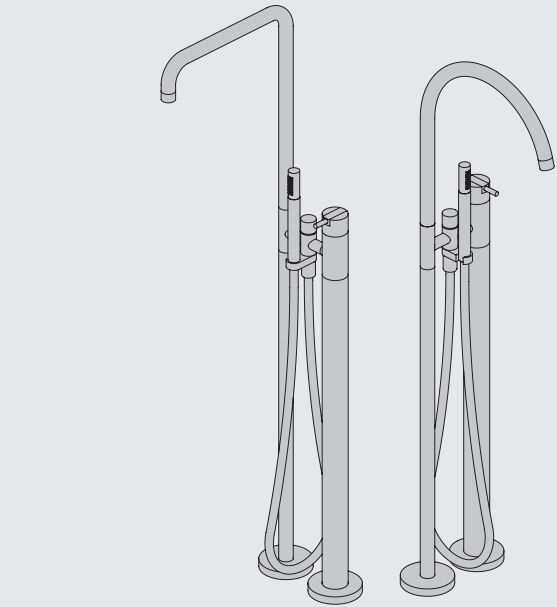












www.vola.com
mnt_FS1_V5_40600108
16-12-2022










vola

5 703182 372396

 Max. 65°C, 150°F Max. 10 Bar/145 Psi		Bar:	1	2	3	4	5
	FS1	(l/min)	10.2	15.0	18.6	18.6	24.0
	VR624D-STD	(Gal/min)	2.7	4.0	4.9	5.7	6.3
	FS1	(l/min)	12.6	18.0	22.2	25.2	28.8
	VR624E-ALT	(Gal/min)	3.3	4.8	5.9	6.7	7.6
	T2	(l/min)	9.0	9.0	9.0	9.0	9.0
		(Gal/min)	2.4	2.4	2.4	2.4	2.4

Temperature shall be regulated by one of the following means:
1. A limiting device conforming to either ASSE 1070/ASME A112.1070/CSA B125.70 or CSA B125.3.
2. A water heater conforming to ASSE 1084.

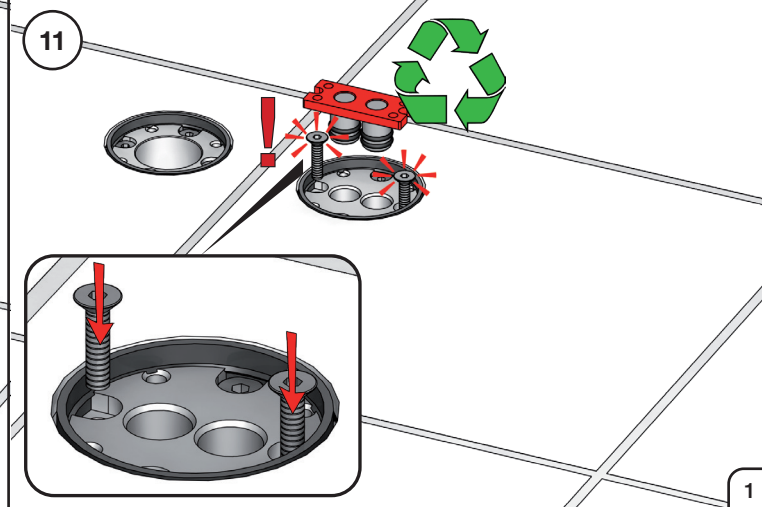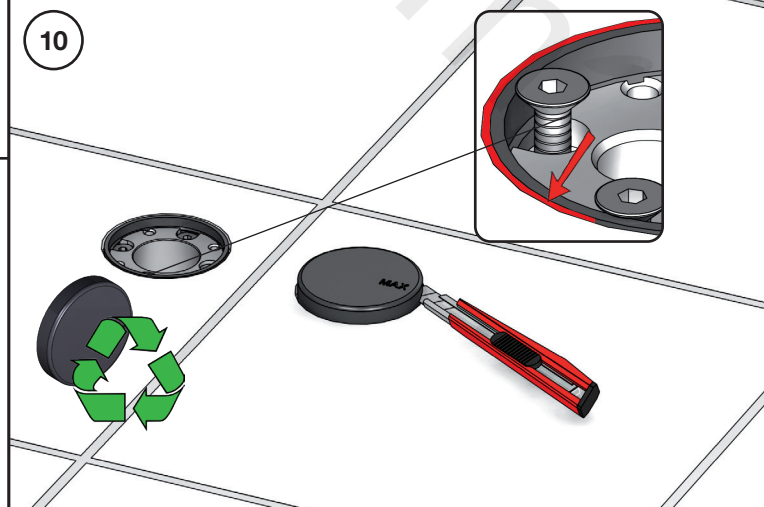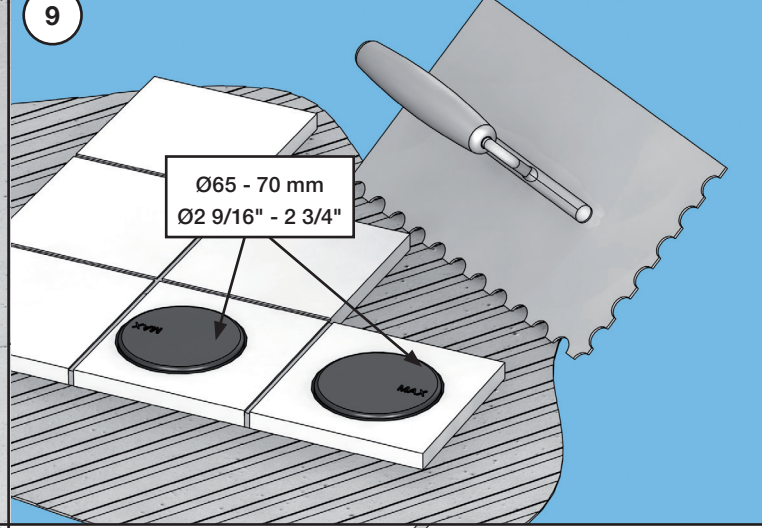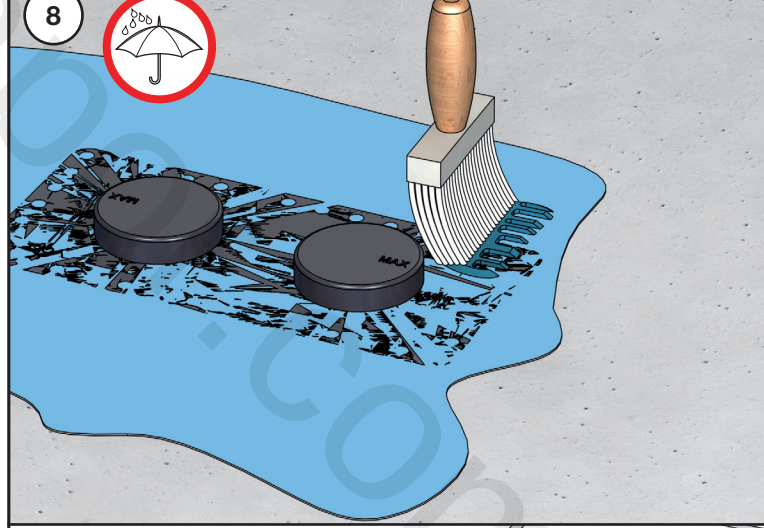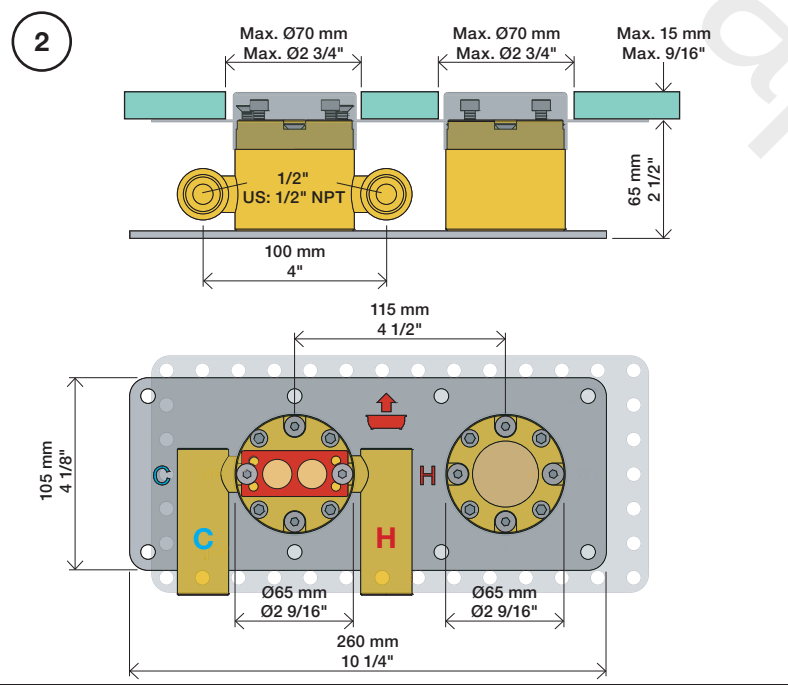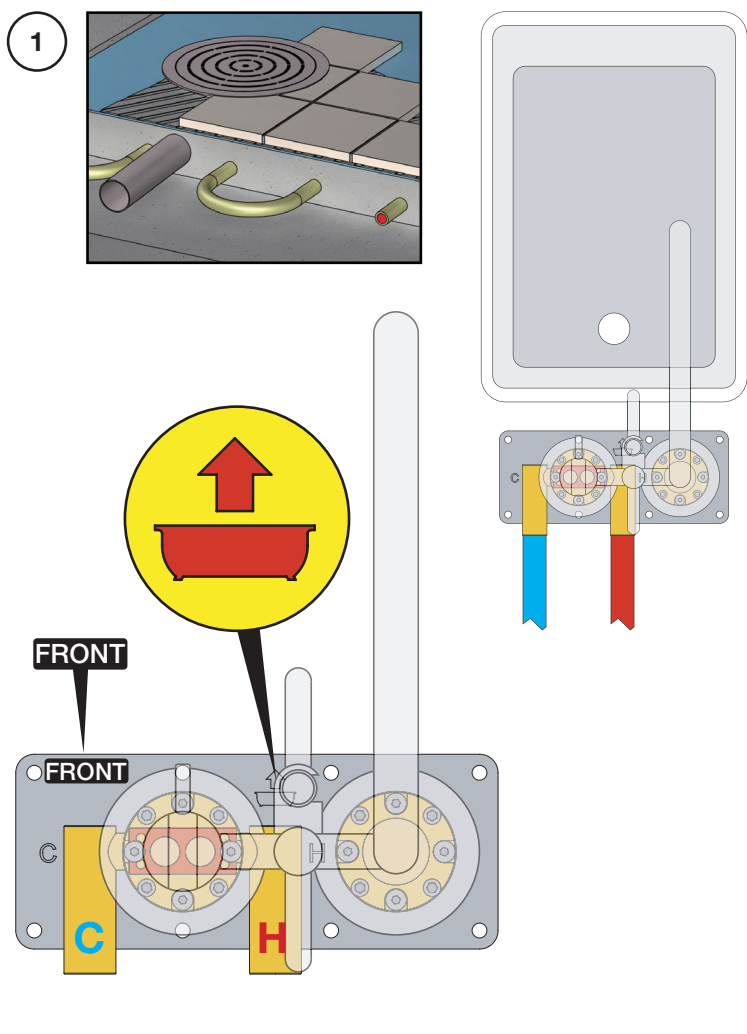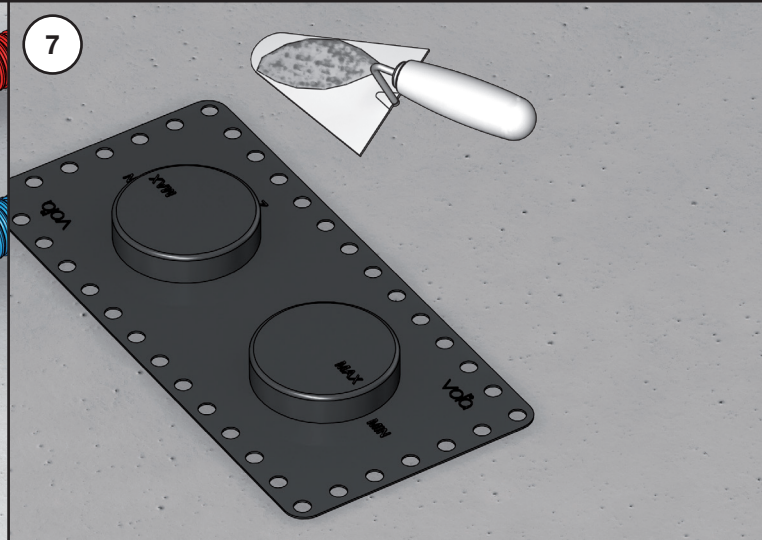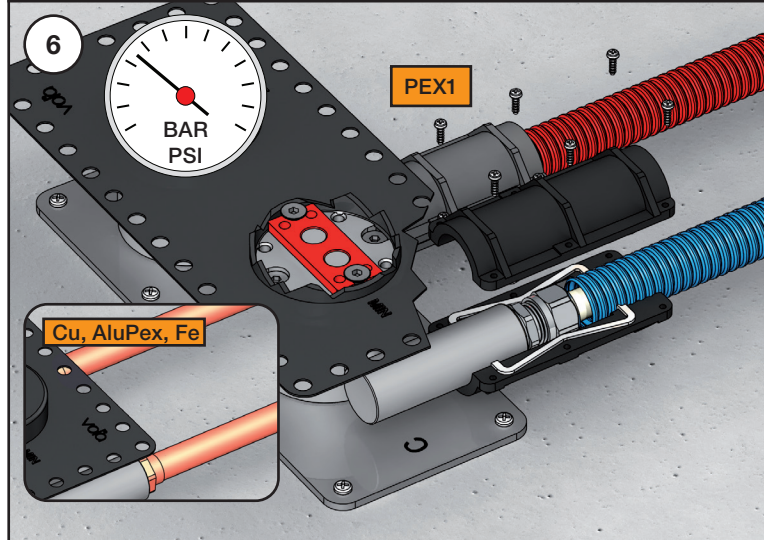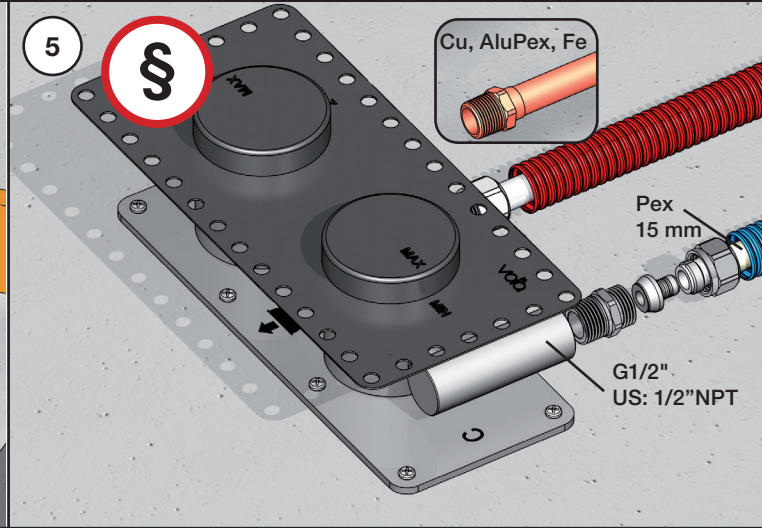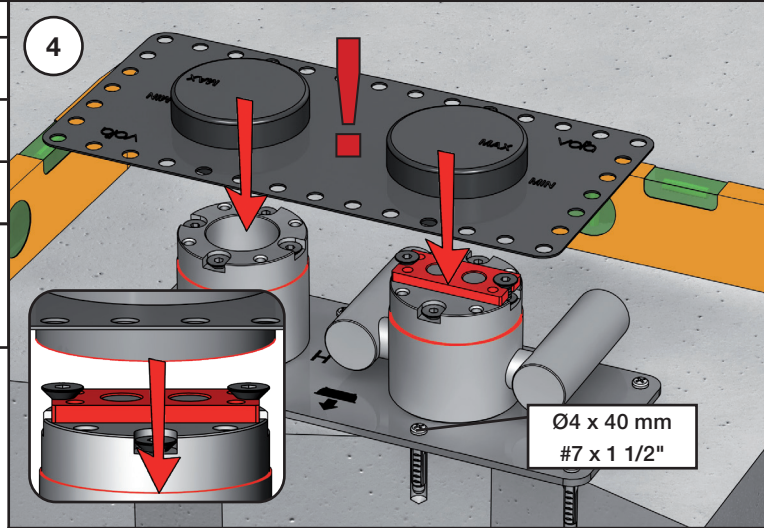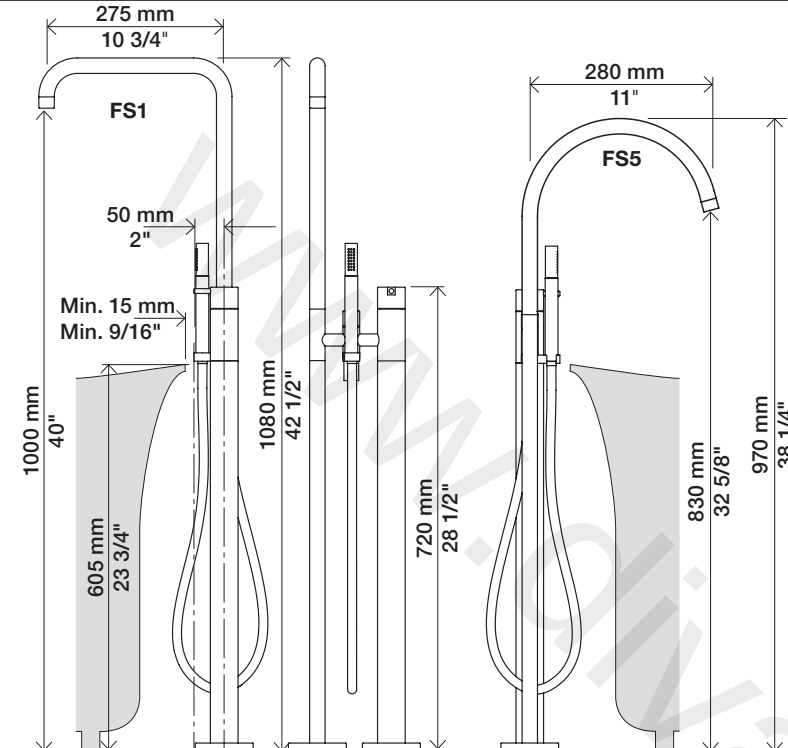

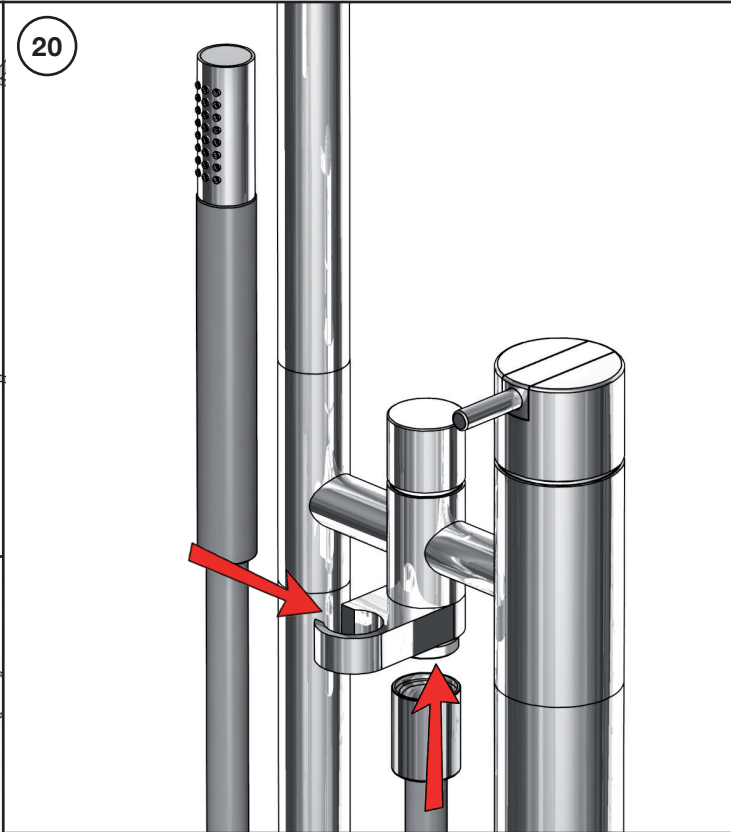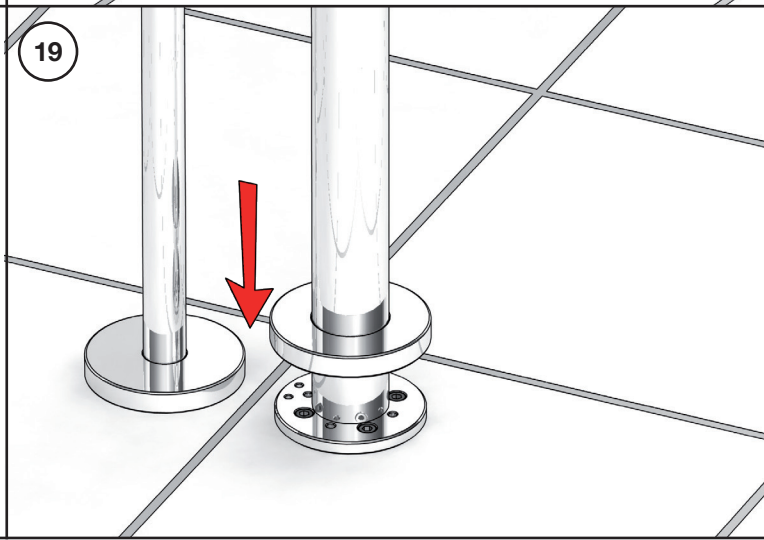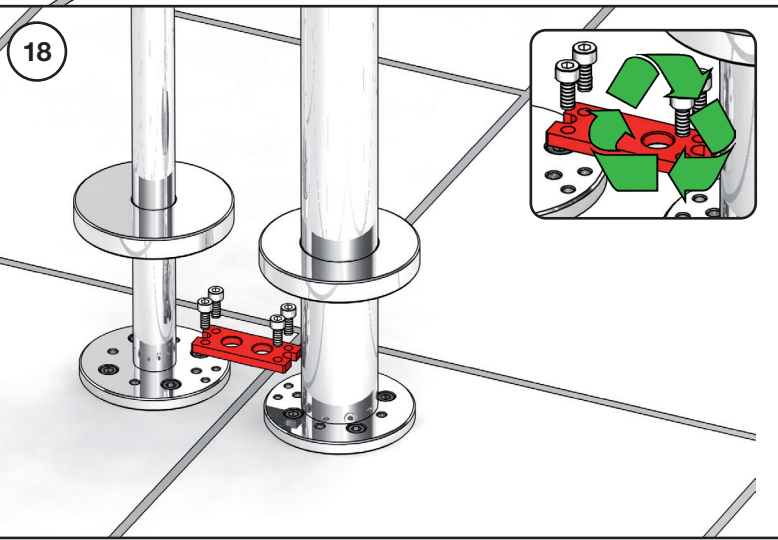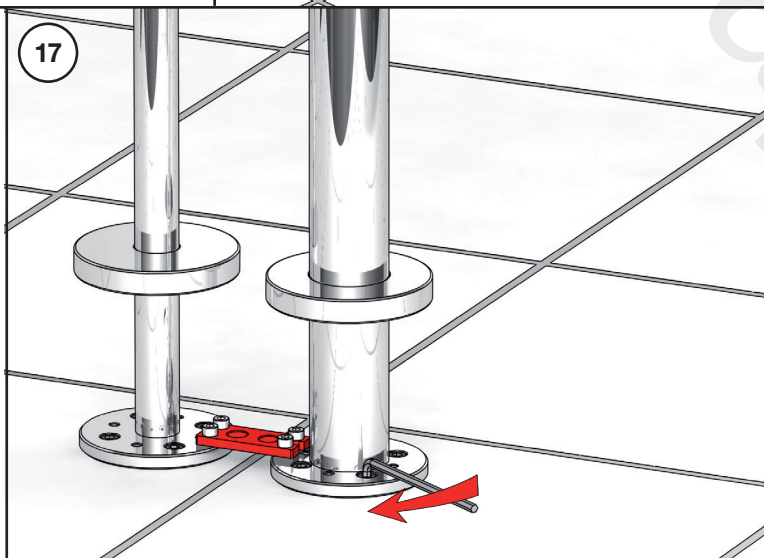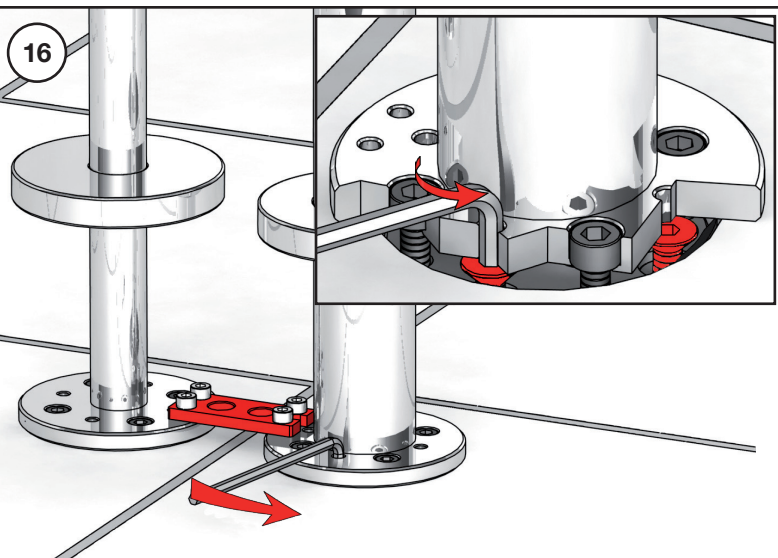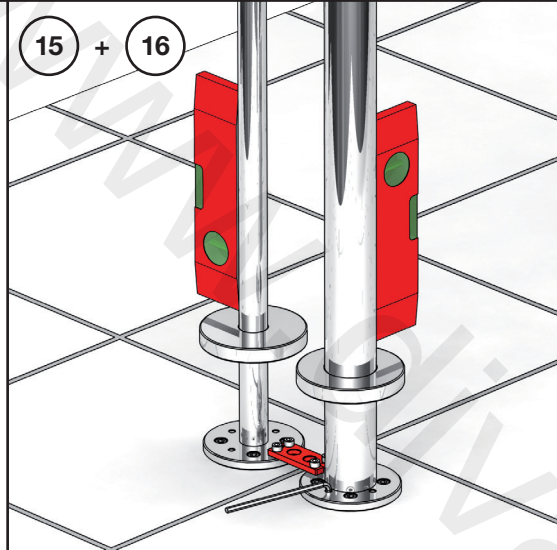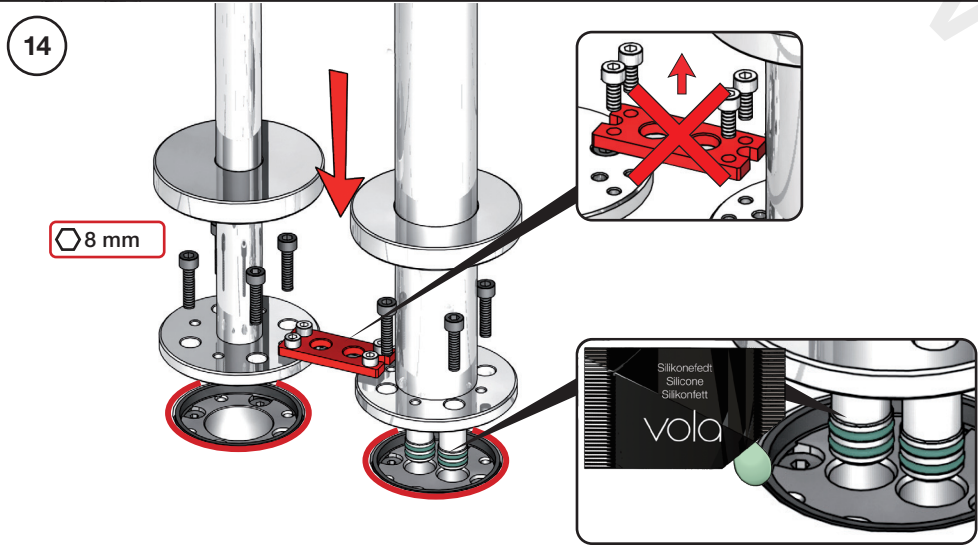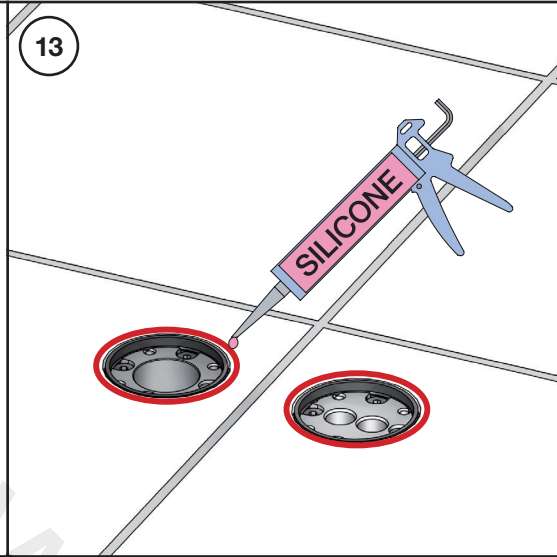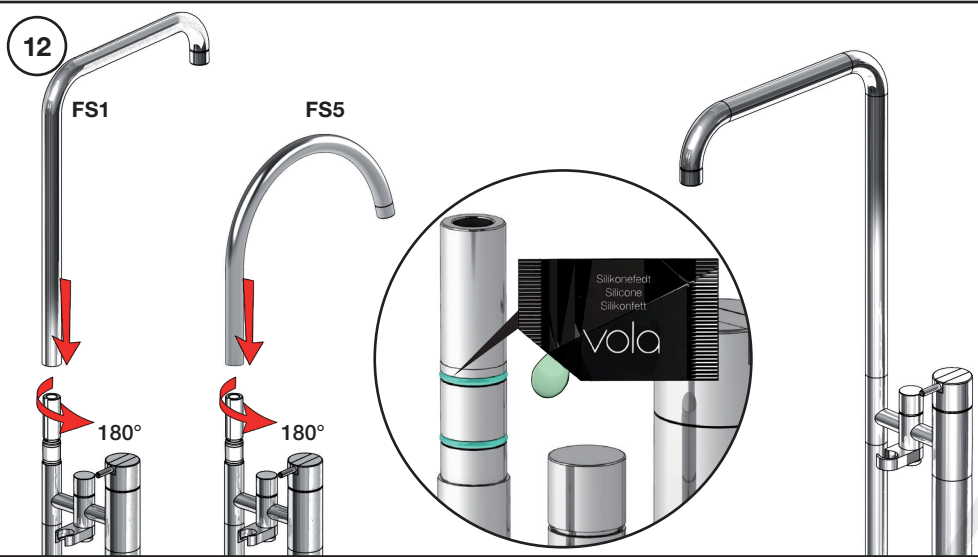

Extension
Verlängerung
Forlængelse

Förlängning
Verlængstücken
Verlängerung

X:	
3 - 15 mm 2/16" - 9/16"	Standard
15 - 25 mm 9/16" - 1"	VR1395+15
25 - 35 mm 1" - 1 3/8"	VR1395+30

VR1395

48 mm
2"
38 mm
2"
13 mm

M15x1

x8 x8

X

A

1 2 3 4 5 6

X

B







1 2

13 mm ~ 33/64"


C

x8 x8


2

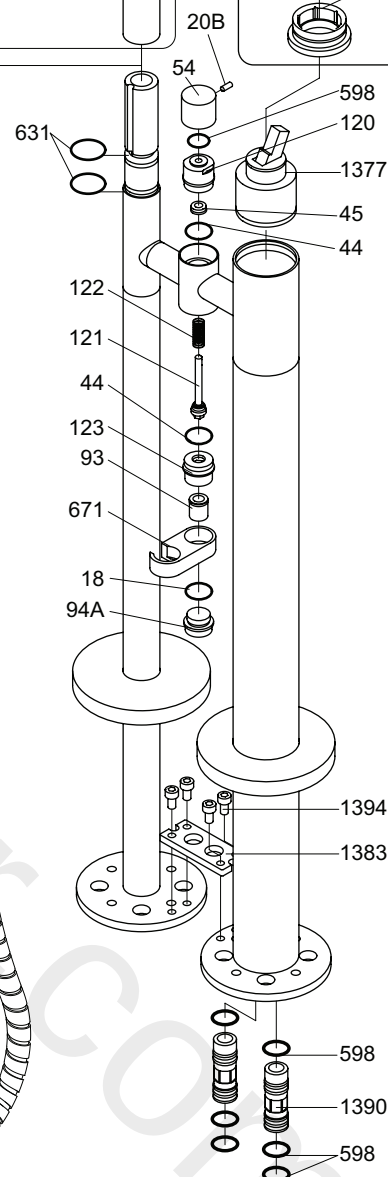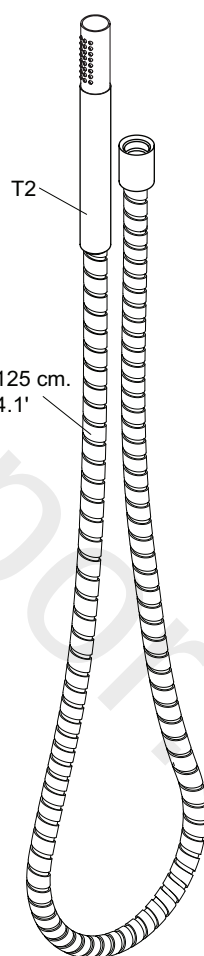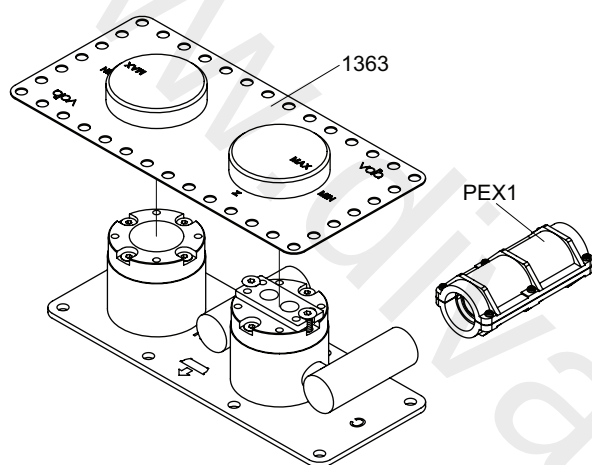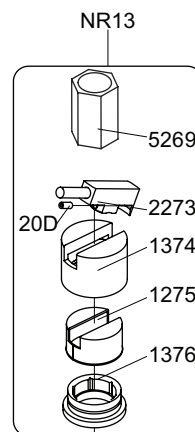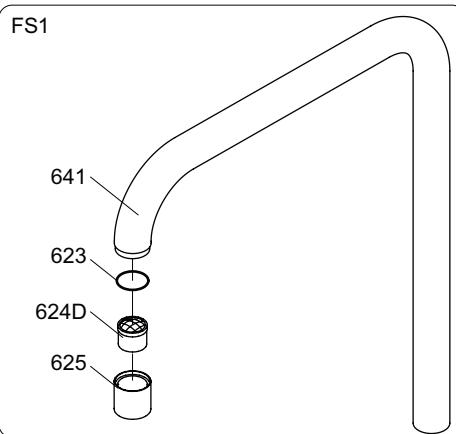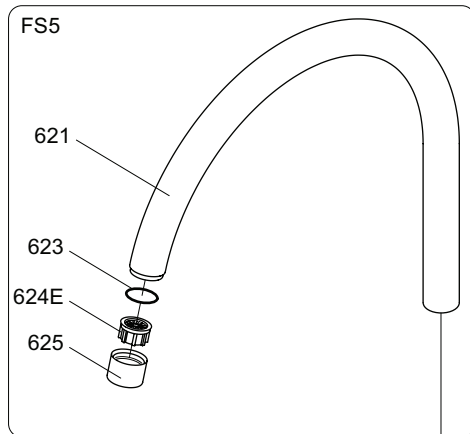


VR 1395

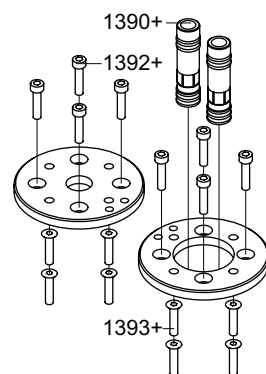


VR1398

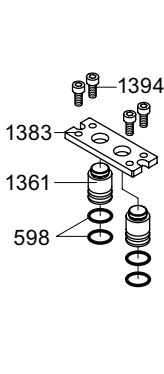

VR2002

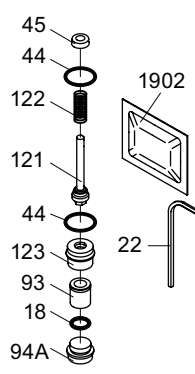

NR13: VR20D, VR1275, VR1374, VR1376, VR2273, VR5269
 VR010D: VR623, VR624D
 VR1395: 6xVR598, 2xVR1390+, 8xVR1392+, 8xVR1393+
 VR1398: 4xVR598, 2xVR1361, VR1383, 4xVR1394
 VR2002: VR18, VR22, 2xVR44, VR45, VR93, VR 94A, VR121, VR122, VR123, VR1902



vola

Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA FS1 & FS5

Date
 Nov. 11

Rev.
 2

Sheet
 SB53