

# TECHNICAL DATA SHEET

## GLORIOUS

### Thermostatic Recessed Dual Control Shower Valve with Diverter


#### Product Specification

Product Code:	GLR SHCDIV C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Supply:	Suitable for all plumbing conditions, preferably balanced.
Inlet Connections:	15mm Compression connections
Working Pressures:	Min 0.2 Bar, Max 5.0 Bar



#### Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min
- Requires rear access to service the filters
- Cartridge can be accessed from front

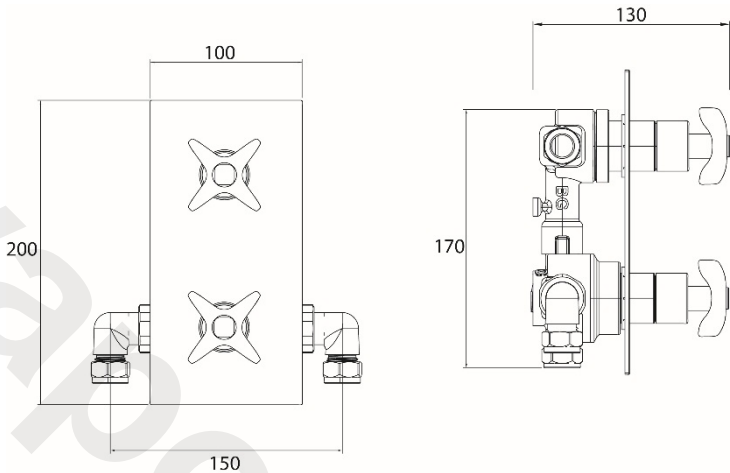

#### Flow Rates (litres per minute)


System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
GLR SHCDIV C - Outlet 1	6.9	12.8	19	27.6	33.8	43.64
GLR SHCDIV C - Outlet 2	6.7	12.5	18.5	27	33.07	42.69

#### Compliance/Approvals

WRAS Certificate No: 2005901

Technical Advice: For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

Guarantee: 5 years covering manufacturing faults.

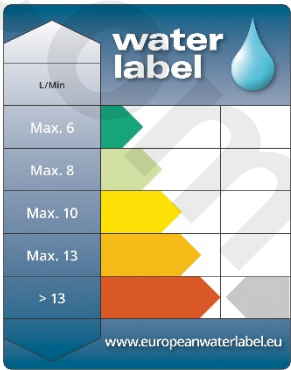

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)

