


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsv gledning
Montage hanleiding
Manuel de montage

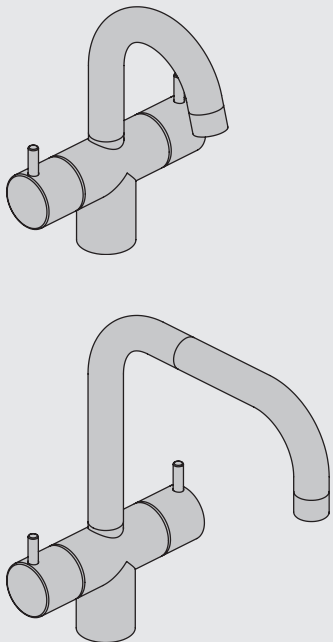

HV6 - KV7_V3_40999826
01-01-2023

[illegible]

Max.	l/min.	Gal/min.
HV6/7:	9,0	2.0
KV6/7	9,0	2.0








Technical drawing of a U-shaped metal component. The drawing shows the component from a side perspective, highlighting its smooth, polished surface and rounded bends. The dimensions are as follows:


- Overall width: 200 mm (8")
- Inner radius of the top bend: 120 mm (4 3/4")
- Overall height: 260 mm (10")
- Inner radius of the bottom bend: 170 mm (6 3/4")

Technical drawing of the cable end showing dimensions:

- Overall length: 100 mm / 4"
- Radius of curvature: 125 mm / 4 7/8"
- End diameter: 200 mm / 8"

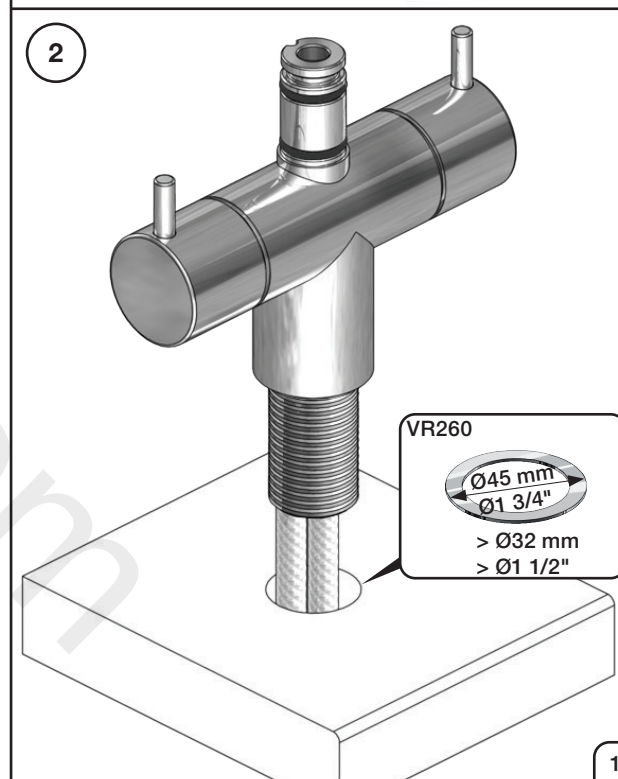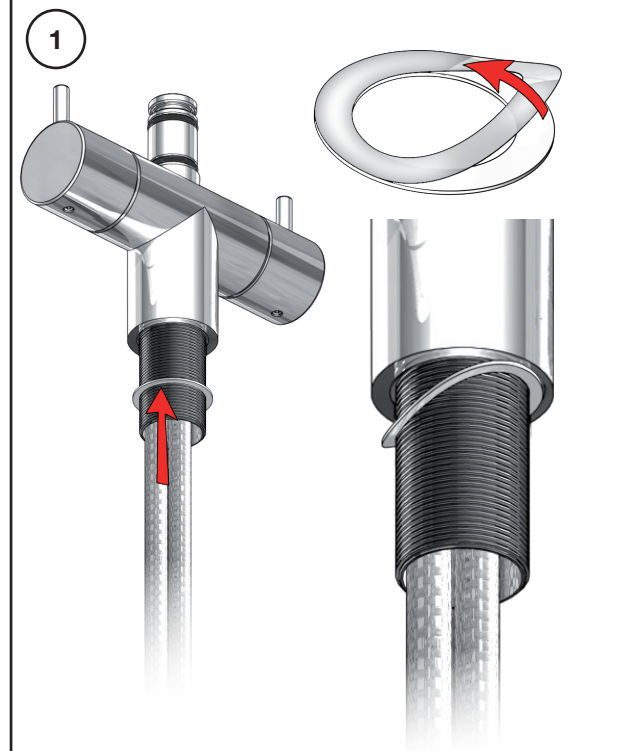

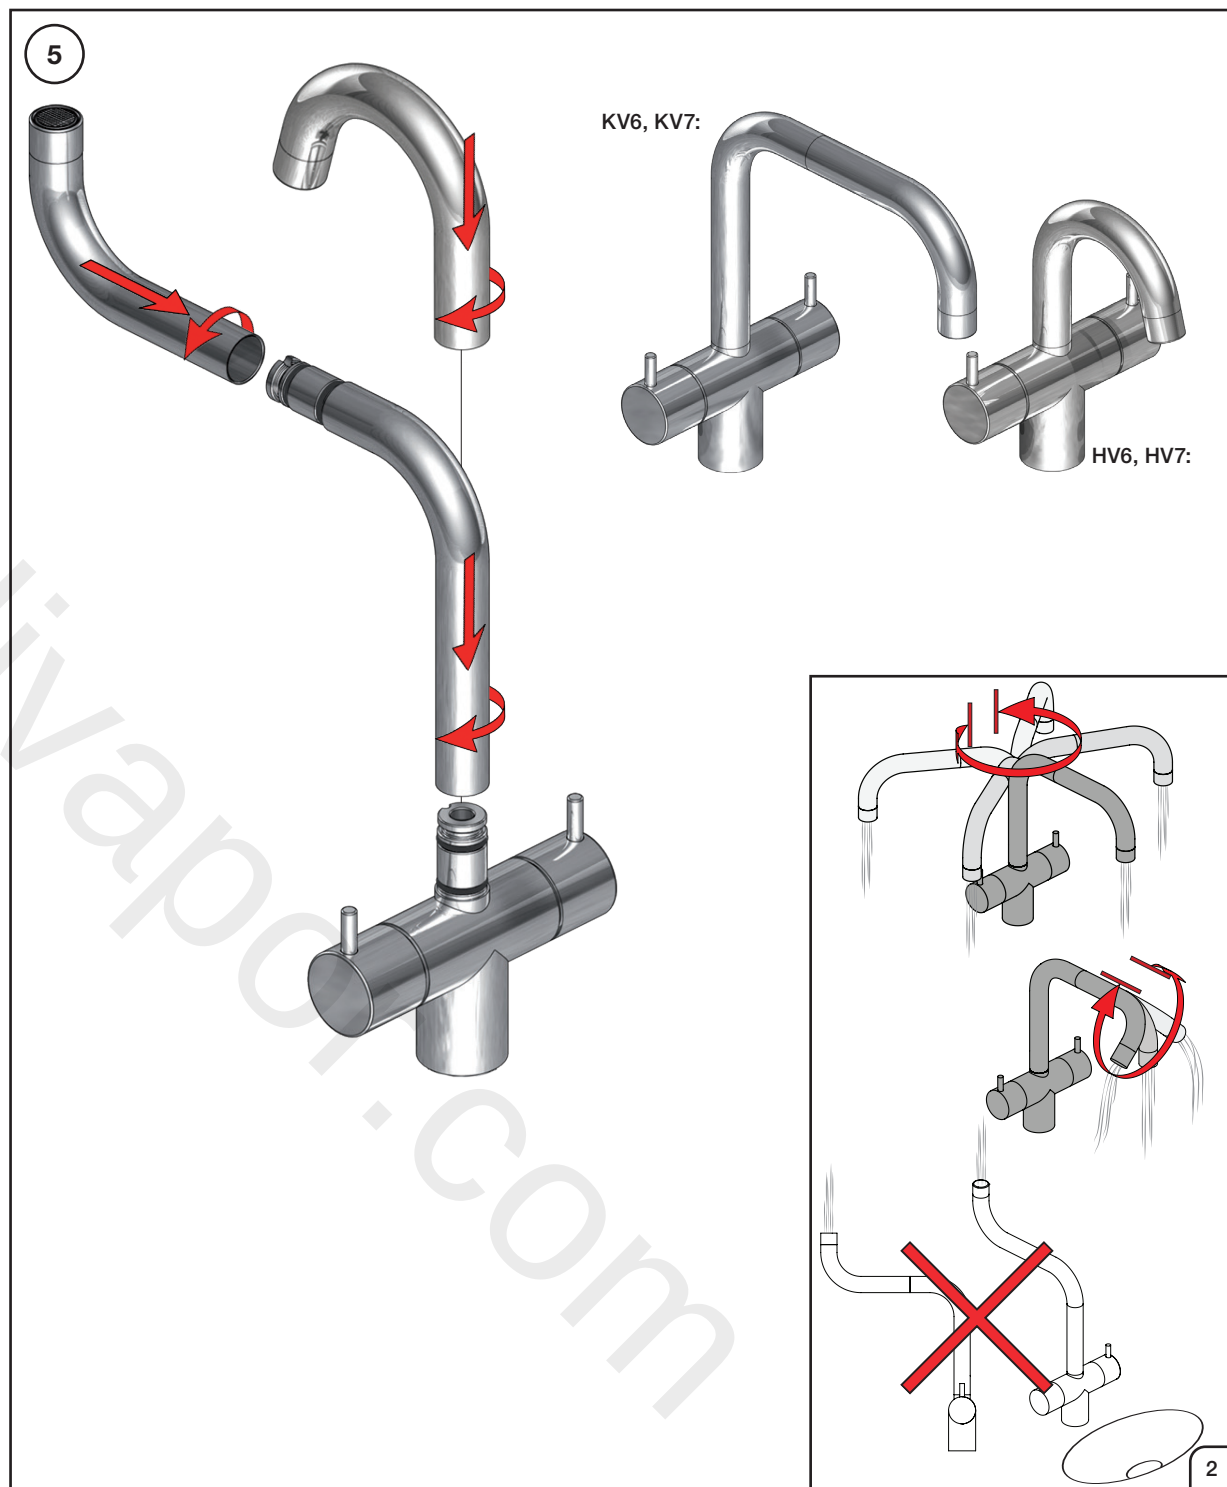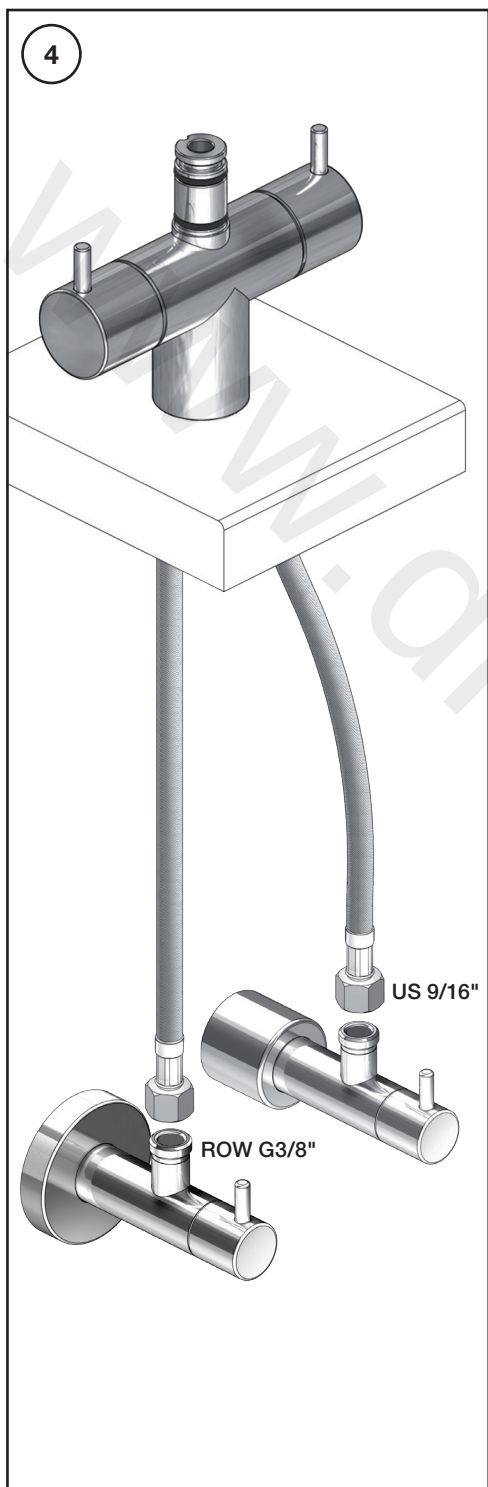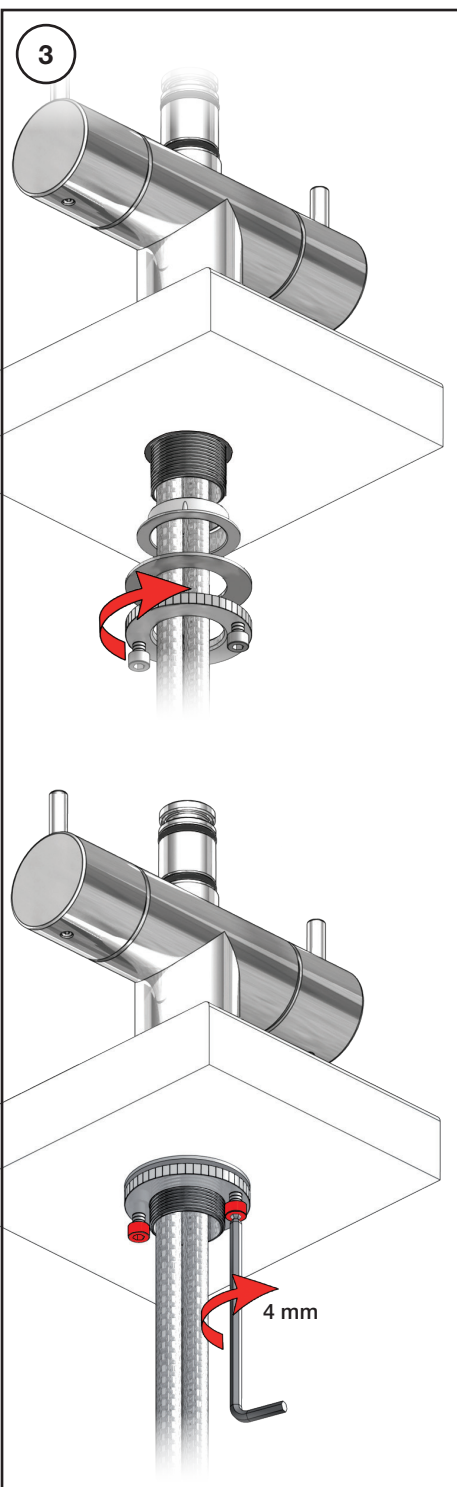

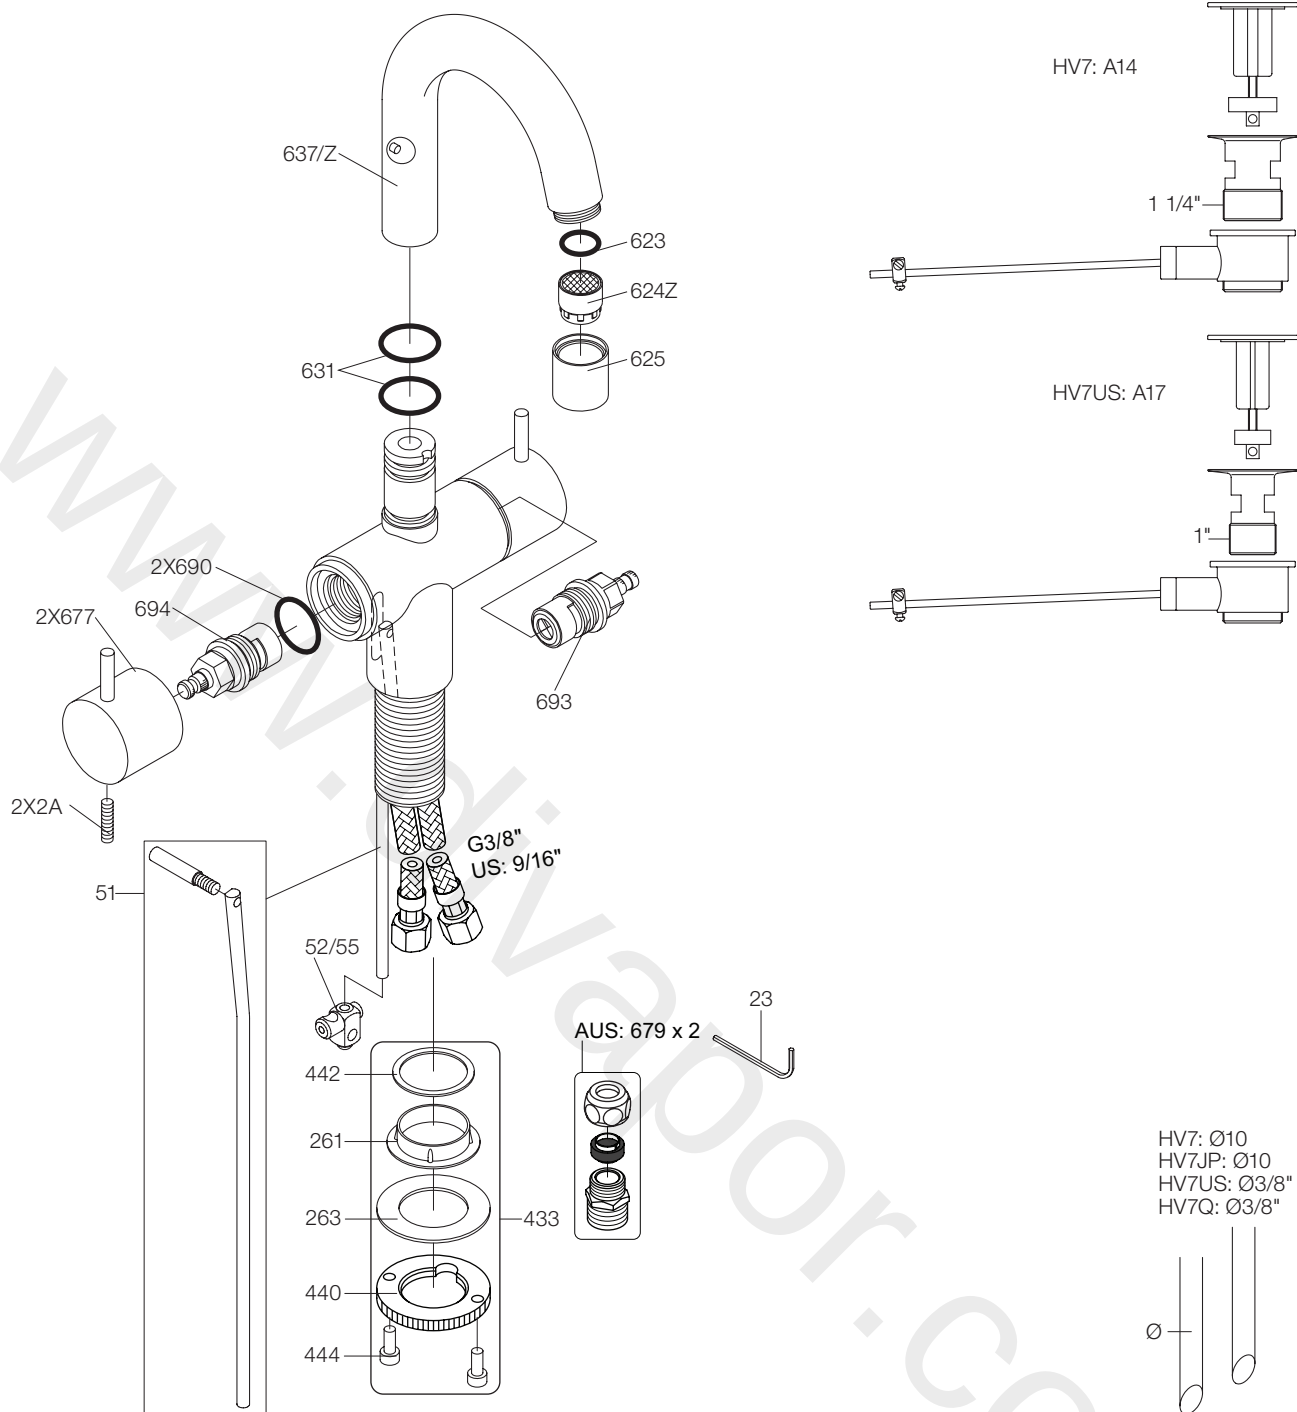

HV7: A14


1 1/4"

HV7US: A17

1"

HV7: Ø10
HV7JP: Ø10
HV7US: Ø3/8"
HV7Q: Ø3/8"

010Z: VR623, VR624Z
VR433: VR261, VR263, VR440, VR442, 2xVR444
VR693K: VR23, VR693
VR694K: VR23, VR694
NR.7: VR2A, VR677



vola

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA HV7

Date

Jan. 23

Rev.

7

Sheet

SB 46