

## Features

- A single handle controls both on/off activation and temperature setting
- 6-3/4" (171mm) spout height
- 5" (127 mm) spout reach
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Clicker drain with tailpiece and overflow
- Ideal for vessel sink applications
- Coordinates with other products in the Riff collection

## Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

## Installation

- Deck-mount
- Single hole
- Flexible supply lines and quick-connect fittings simplify installation

## Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED™ Green Building Rating System

## Recommended Products/Accessories

- K-27412 Towel ring
- K-27413 Pivoting toilet paper holder



## Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)


## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description                    |
|-------------------------------------------------------------------------------------|------|--------------------------------|
|  | CP   | Polished Chrome                |
|  | SN   | Vibrant™ Polished Nickel       |
|  | BN   | Vibrant™ Brushed Nickel        |
|  | BL   | Matte Black                    |
|  | 2MB  | Vibrant™ Brushed Moderne Brass |

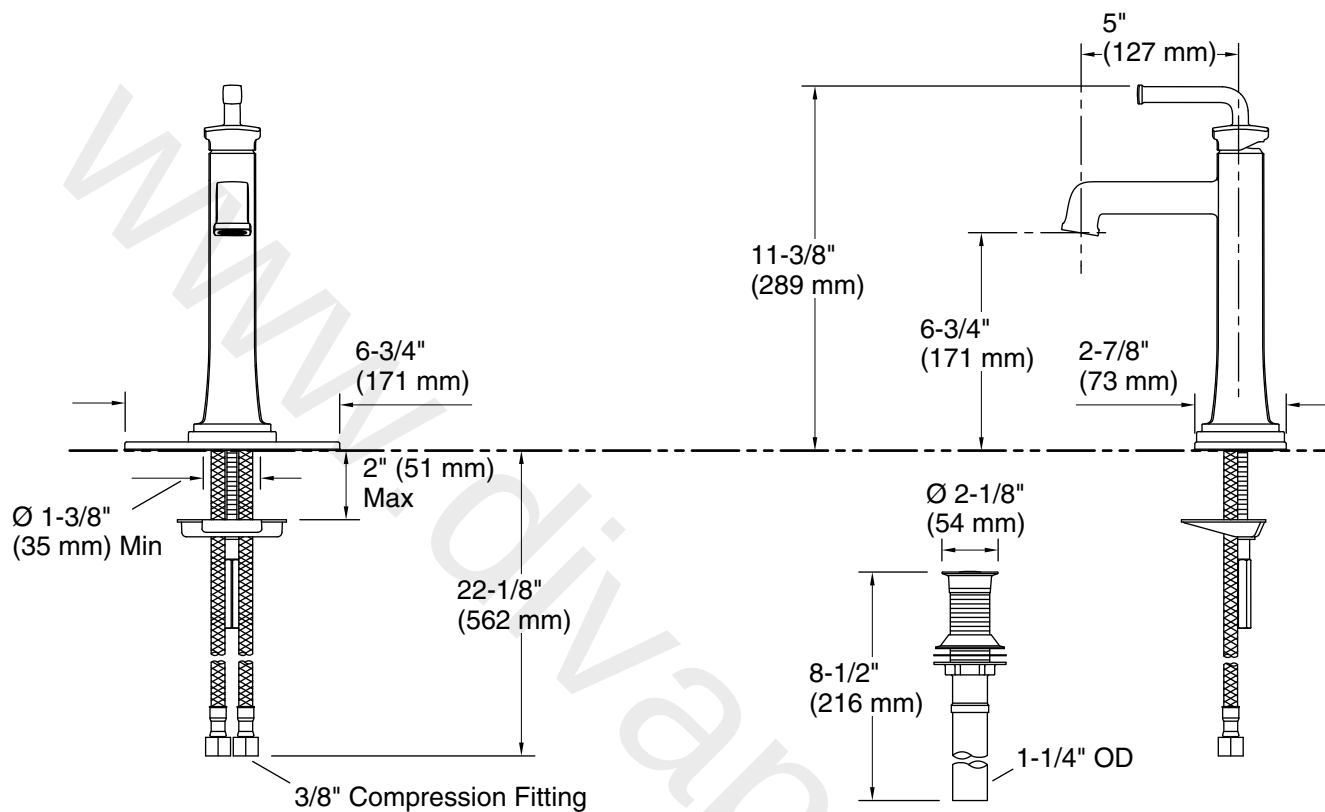

## Technical Information

All product dimensions are nominal.

**Faucet:**

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

**Spout:**

Spout reach: 5" (127 mm)

## Notes

Install this product according to the installation instructions.