

# KOHLER® Faucets Rite-Temp™ bath and shower trim kit with push-button diverter and cross handle, 1.75 gpm

## Purist™

### K-T14420-3G

#### Features

- Cross handle
- 35° spout
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom

#### Material

- Premium material construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing


#### Installation

- Trim only; requires valve to complete installation (sold separately)

#### Adapters, Rough-in and Extension Kits

1016154

Range: 3-1/2" (89 mm) -  
4-1/2" (114 mm)

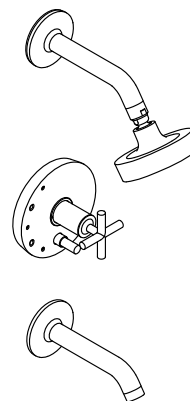

#### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense™  
California Energy Commission (CEC)

#### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description              |
|-------------------------------------------------------------------------------------|------|--------------------------|
|  | CP   | Polished Chrome          |
|  | SN   | Vibrant™ Polished Nickel |
|  | BN   | Vibrant™ Brushed Nickel  |
|  | BV   | Vibrant™ Brushed Bronze  |
|  | BL   | Matte Black              |

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

7-12-2023 06:25 - US/CA


THE BOLD LOOK  
OF **KOHLER®**

# KOHLER® Faucets

## Rite-Temp™ bath and shower trim kit with push-button diverter and cross handle, 1.75 gpm

### Purist™

### K-T14420-3G

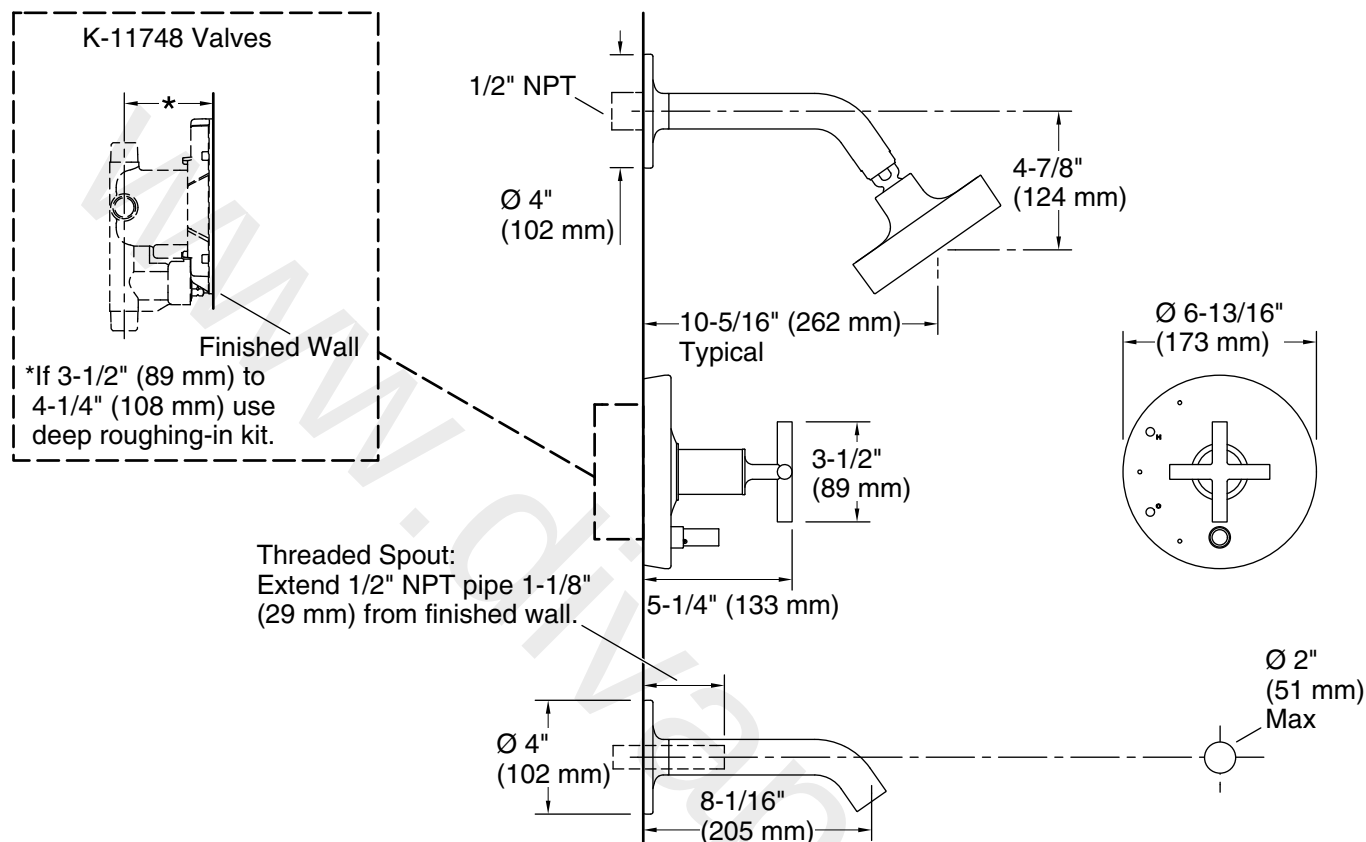

#### Technical Information

All product dimensions are nominal.

Drain included: No

#### Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 80 psi (5.5 bar)

#### Notes

For use with automatic compensating valves rated at 1.6 gal/min (6.1 l/min) or less.

Install this product according to the installation instructions.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.