

# OP THBF WML C

## OPAC Tap Range Opac Thermostatic Dual Control Wall Mount Bath Filler with Chrome Levers



### Specification

Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Wall
Handle Type:	Lever
Connection Inlet:	3/4" BSP
Connection Outlet:	1/2" BSP
Number of Tap Holes:	2
Valve/Cartridge Type:	Thermostatic
Plumbing System Requirements:	All - Ideally balanced
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Maximum Hot Water Temperature: °C	80
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

### Features:

- Cool touch body for ultimate user safety
- Easy to use dual lever controls
- Integral isolator and easy clean filters
- Automatic thermostatic shutoff in the event of hot or cold water failure
- Pre-set maximum temperature at 38°C which can be overridden


### Product Certifications:



For more products, visit our website:  
<http://www.bristan.com>



### Dimensions (measurements in mm)

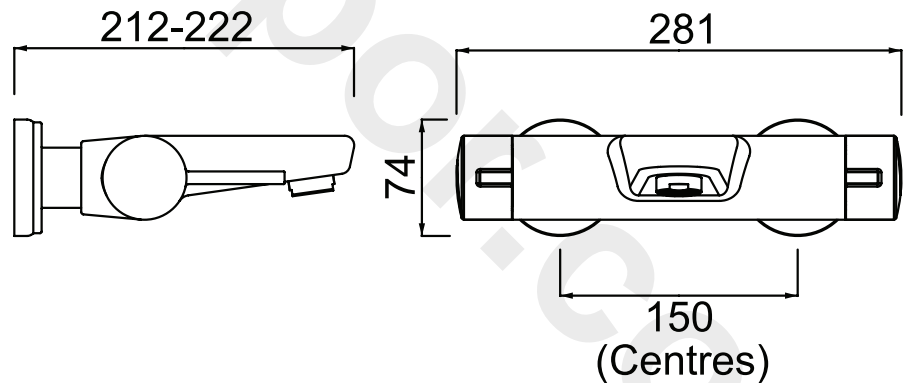

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
OP THBF WML C	9.4	14.9	21	30	38	49.1

TECHNICAL  
DATA  
SHEET



**BRISTAN**  
TAPS & SHOWERS

D6